

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Prior Application: 08/965,185

Filed: November 6, 1997

Of: Victor H. Shear, et al.

For: SYSTEMS AND METHODS FOR MATCHING, SELECTING,
NARROWCASTING, AND/OR CLASSIFYING BASED ON RIGHTS
MANAGEMENT AND/OR OTHER INFORMATION

Group Art Unit: Unassigned

Examiner: Unassigned

SIR:

This is a request for filing a

☒ Continuation ☐ Divisional Application under 37 C.F.R. § 1.53(b) of pending prior application Serial No. 08/965,185, filed November 6, 1997.

1. ☒ Enclosed is a complete copy of the prior application as originally filed including the drawings but without the oath or Declaration and including a new title page. I hereby verify that the attached papers are a true copy of prior application Serial No. 08/965,185 as filed on November 6, 1997.
2. ☐ Enclosed is a substitute specification under 37 C.F.R. § 1.125.
3. ☒ Cancel Claims 2-135.
4. ☒ A Preliminary Amendment is enclosed.
5. ☒ The filing fee is calculated on the basis of the claims existing in the prior application as amended at 3 and 4 above.

LAW OFFICES

FINNEGAN, HENDERSON,
FARABOW, GARRETT,
& DUNNER, L.L.P.
1300 I STREET, N. W.
WASHINGTON, DC 20005
202-408-4000

jc685 U.S. PTO
02/04/00

jc678 U.S. PTO
09/498369
02/04/00

Basic Application Filing Fee					\$690	\$ 690.00
	Number of Claims		Basic	Extra Claims		
Total Claims	50	-	20	30	x \$18	\$ 540.00
Independent Claims	10	-	3	7	x \$78	\$ 546.00
[] Presentation of Multiple Dep. Claim(s)					+\$260	
Subtotal					\$ 1776.00	
Reduction by 1/2 if small entity					-	
TOTAL APPLICATION FILING FEE					\$ 1776.00	

6. ☒ A check in the amount of \$1,776.00 to cover the filing fee is enclosed.
7. ☒ The Commissioner is hereby authorized to charge any fees which may be required including fees due under 37 C.F.R. § 1.16 and any other fees due under 37 C.F.R. § 1.17, or credit any overpayment during the pendency of this application to Deposit Account No. 06-0916.
8. ☒ Amend the specification by inserting before the first line, the sentence:

--This application is a continuation application of pending prior application Serial No. 08/965,185, filed November 6, 1997, which is hereby expressly incorporated by reference.--
9. ☐ New formal drawings are enclosed.
10. ☒ The prior application is assigned of record to: InterTrust Technologies Corporation.
11. ☐ Priority of application Serial No. _____, filed on _____ in _____ (country) is claimed under 35 U.S.C. § 119. A certified copy

☐ is enclosed or ☐ is on file in the prior application.
12. ☐ A verified statement claiming small entity status

☐ is enclosed or ☐ is on file in the prior application.
13. ☐ A copy of a new power of attorney is enclosed. This power of attorney replaces the power of attorney filed in the prior application.

14. ■ Please address all correspondence to FINNEGAN, HENDERSON, FARABOW, GARRETT and DUNNER, L.L.P., 1300 I Street, N.W., Washington, D.C. 20005-3315.

PETITION FOR EXTENSION. If any extension of time is necessary for the filing of this application, including any extension in the parent application, Serial No. 08/965,185 filed November 6, 1997, for the purpose of maintaining copendency between the parent application and this application, and such extension has not otherwise been requested, such an extension is hereby requested, and the Commissioner is authorized to charge necessary fees for such an extension to our Deposit Account No. 06-0916. A duplicate copy of this paper is enclosed for use in charging the deposit account.

FINNEGAN, HENDERSON, FARABOW,
GARRETT & DUNNER, L.L.P.

Dated: February 3, 2000

By: Linda J. Thayer
Linda J. Thayer
Reg. No. P45,681

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Continuation Application of:)
Victor H. SHEAR, et al.) Group Art Unit: Unknown
Serial No: 08/965,185) Examiner: Unknown
Filed: November 6, 1997)
For: SYSTEMS AND METHODS FOR)
MATCHING, SELECTING,)
NARROWCASTING, AND/OR)
CLASSIFYING BASED ON)
RIGHTS MANAGEMENT)
AND/OR OTHER INFORMATION)

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

PRELIMINARY AMENDMENT

Prior to the examination, please amend this application as follows:

IN THE CLAIMS:

Please cancel claims 2 through 135 and add the following new claims 136 through 185:

136. A matching and classification utility system including the following:

an object classifier including:

control means for operating on rights management information, the

control means at least in part controlling the object classifier;

LAW OFFICES

FINNEGAN, HENDERSON,
FARABOW, GARRETT,
& DUNNER, L.L.P.
1300 I STREET, N. W.
WASHINGTON, DC 20005
202-406-4000

means for classifying content objects;

means for classifying rights management information;

a user classifier, including

means for using audit trails in assigning users to classes;

means for using profiles in assigning users to classes; and

a matching engine which receives classification information from the object classifier and the user classifier and matches classified information.

137. A matching and classification utility as in Claim 136 further including a rights operating system.
138. A matching and classification utility as in Claim 136 further including a memory storing rights management information.
139. A matching and classification utility as in Claim 136 in which the matching engine further includes control means which use rights management information to at least in part control the operations of the matching engine.

140. A matching and classification utility as in Claim 136 in which the object classifier includes means for classifying metadata information.

141. A method, including the steps of:

providing rights management information, content objects and metadata to an object classifier;

controlling the operation of the object classifier using a rule;

based on the provided information and the rule, the object classifier assigning information to categories and generating matching information;

storing the matching information in a secure container, the secure container having associated a rule at least in part governing use of the secure container contents; and

providing the secure container to a third party.

142. A method as in Claim 140, in which the step of the object classifier assigning information to categories includes assigning information to a class within a class hierarchy.

143. A method as in Claim 140, further including creating an audit record indicating the results of the assignment of information to categories.
144. A method as in Claim 140 in which the matching information matches a user to a content object.
145. A method as in Claim 140, in which the matching information matches a rule to a content object.
146. A method including the steps of:
- at a node associated with a user, collecting usage information, the collection governed at least in part by a rule provided by a value chain participant;
- sending the collected information to a usage clearinghouse;
- the usage clearinghouse analyzing the usage information and providing analysis information to a matching and classification utility;
- the matching and classification utility using information provided from the usage clearinghouse to assign the user to a class;

the matching and classification utility selecting a content object for communication to the user, the content object selected at least in part based on the class assignment;

the matching and classification utility packaging the content object in a secure container, the secure container having associated a rule set at least in part governing use of at least a portion of the secure container contents;

the matching and classification utility providing the secure container to the user.

147. A method as in Claim 146, further including:

before the matching and classification utility provides the secure container to the user, the matching and classification utility receiving the content object and assigning the content object to a class,

the selection of the content object based at least in part on the class to which the content object was assigned.

148. A method as in Claim 146, in which the rule set includes a rule provided by a content provider or publisher and a rule provided by the matching and classification utility.

149. A method as in Claim 146, further including:

before the matching and classification utility provides the secure container to the user, the matching and classification utility communicating with a content provider, the communication including information about the user class, the content provider providing the content object to the matching and classification utility at least in part in response to the communication.

150. A method as in Claim 149, further including:

before the content provider provides the content object to the matching and classification utility, the content provider packaging the content object in a secure container.

151. A method including the following steps:

creating a secure container;

associating a first rule with the secure container, the rule at least in part governing use of at least some of the secure container contents, the first rule at least in part specifying potential users or recipients of the secure container contents, the specification being based at least in part on a class to which the potential users or recipients have been assigned;

sending the secure container to a first remote party;

the first remote party embedding a content object in the secure container;

sending the secure container, including the embedded content object, to a second remote party, the second remote party consisting of a potential user;

evaluating a digital certificate associated with the potential user;

determining, based at least in part on the digital certificate, that the potential user has been assigned to a class; and

based on the determination, and at least in part under control of the first rule, making at least some of the secure container contents available to the potential user.

152. A method as in Claim 151, further including:

the first remote party associating a second rule with the secure container, the second rule at least in part governing use of at least a portion of the secure container contents; and

the step of making at least some of the secure container contents available to the potential user occurring at least in part under control of the second rule.

153. A method as in Claim 151, further including:

assigning the potential user to the class, the assignment being based at least in part on the potential user's use of content.

154. A method as in Claim 153 in which the assignment of the potential user to the class is based at least in part on demographic information.

155. A method as in Claim 154, further including:

following the potential user's access to the secure container contents, generating an audit trail describing an aspect of the access and providing the audit trail to a remote site.

156. A method including the steps of:

receiving a content object at a matching and classification utility;

assigning the content object to a class, the classification based at least in part by one or more topics to which the content object relates;

at a user site, generating user demographic information, including
information entered by the user;

transmitting the demographic information to the matching and
classification utility;

at a user site, generating usage information relating to usage of content by
the user;

transmitting the usage information to the matching and classification utility;

at the matching and classification utility, using the demographic
information and the usage information to assign the user to a class;

at the matching and classification utility, matching the content object to the
user based at least in part on the content object class and the user class;

based at least in part on the match, transmitting the content object to the
user in a first secure container having associated a first rule at least in part
governing use of at least a portion of the secure container contents.

157. A method as in Claim 156, further including:

before the transmission of the usage information to the matching and classification utility, transmitting the usage information to a usage clearinghouse, the usage clearinghouse analyzing the usage information and transmitting the usage information to the matching and classification utility.

158. A method as in Claim 156, in which:

the matching and classification utility receives the content object from a first remote site, the content object being received in the first secure container; and

the content object is transmitted to the user in a secure container having associated the first rule and having associated a second rule, the first and second rules at least in part governing use of at least a portion of the secure container contents, the second rule being associated with the secure container by the matching and classification utility.

159. A method as in Claim 156, in which the usage information includes information relating to a payment method used by the user.

160. A method as in Claim 156, further including:

the matching and classification utility receiving rating information from a remote source, the rating information rating an aspect of the content object; and

the matching and classification utility using the rating information in assigning the content object to a class.

161. A digital commerce system including:

a first matching and classification utility including:

an object classifier;

a user classifier including means for analyzing usage data and using the usage data to assign users to classes;

a matching engine;

a communications port connected to an external network;

a protected processing environment; and

one or more memories storing

one or more rules designed to at least in part control the
operations of the object classifier, user classifier, or
matching engine;

usage data received from a usage clearinghouse; and

a digital certificate;

the digital commerce system further including a usage clearinghouse
including:

a communications port for receiving audit trail information from
users and for communicating usage data to the first matching and
classification utility;

a memory storing audit trail information received from users; and

a processor for analyzing audit trail information and creating usage
data.

162. A digital commerce system as in Claim 161, further including:

a certifying authority including:

means for issuing digital certificates;

a communications port connected to an external network; and

the first matching and classification utility further including means for associating digital certificates with classes.

163. A digital commerce system as in Claim 161, further including:

a secure directory services node, including:

a communications port connected to an external network;

means for receiving requests for information about class memberships,

and a memory storing a database of information, including information correlating individuals with class memberships.

164. A digital commerce system as in Claim 161, in which:
- the first matching and classification utility is associated with a first organization and the digital commerce system further including:
- a second matching and classification utility associated with a second organization, the second matching and classification utility including:
- an object classifier;
 - a user classifier, including means for analyzing usage data and using the usage data to assign users to classes;
 - a matching engine;
 - a communications port connected to an external network;
 - a protected processing environment; and
 - one or more memories storing
 - one or more rules designed to at least in part control the operations of the object classifier, user classifier or matching engine,

usage data received from a usage clearinghouse, and

a digital certificate.

165. A digital commerce system as in Claim 164, further including network means for routing requests for matching and classification services to the first matching and classification utility or the second matching and classification utility, the routing means including means for evaluating whether the requests are appropriate for the first organization or the second organization.

166. A network including the following:

a first matching and classification utility associated with a first vertical market, the first matching and classification utility including:

an object classifier;

a user classifier, including means for analyzing usage data and using the usage data to assign users to classes;

a matching engine;

a communications port connected to an external network;

a protected processing environment; and

one or more memories storing

one or more rules designed to at least in part control the
operations of the object classifier, user classifier or matching
engine; and

a second matching and classification utility associated with a second
vertical market, the second matching and classification utility including:

an object classifier;

a user classifier, including means for analyzing usage data and
using the usage data to assign users to classes;

a matching engine;

a communications port connected to an external network;

a protected processing environment; and

one or more memories storing

one or more rules designed to at least in part control the operations of the object classifier, user classifier or matching engine.

167. A network as in Claim 166, further including:

two entities in the first vertical market, each entity including communications means for communicating with the first matching and classification utility; and

two entities in the second vertical market, each entity including communications means for communicating with the first matching and classification utility.

168. A network as in Claim 167, further including:

a first clearinghouse associated with the first vertical market, the first clearinghouse including communications means for communicating with the first matching and classification utility and for communicating with the first vertical market entities; and

a second clearinghouse associated with the second vertical market, the second clearinghouse including communications means for

communicating with the second matching and classification utility and for communicating with the first vertical market entities.

169. A network as in Claim 168, in which the first vertical market relates to publishing.

170. A network as in Claim 168, in which the first vertical market relates to digital music.

171. A method including the steps of:

generating a first content object;

packaging the first content object with metadata and a first rule;

communicating the first content object to a matching and classification utility;

at the matching and classification utility, using the metadata to assign the content object to a content class;

packaging the first content object in a secure container having associated the first rule, a second rule added at the matching and classification utility, and metadata identifying the content class;

communicating the secure container to a user chosen based at least in part on a match between the content class and a user class to which the user had been assigned;

at the user's site, the user complying with the first rule or the second rule and, based on the compliance, opening the secure container to retrieve at least a portion of the first content object; and

at the user's site, the user using at least a portion of the first content object, the use at least in part controlled by the first rule or the second rule.

172. A method as in Claim 171, further including:

before the step of communicating the secure container to the user, the matching and classification utility receiving demographic information from the user and, based at least in part on the demographic information, the matching and classification utility assigning the user to the user class.

173. A method as in Claim 172, further including:

before the matching and classification utility receives demographic information from the user, the user packaging the demographic

information in a secure container and associating a rule with the secure container, the rule at least in part governing use of at least a portion of the secure container contents, the demographic information being received by the matching and classification utility in the secure container and the matching and classification utility complying with the rule in making a use of at least a portion of the demographic information.

174. A method as in Claim 171, further including:

before the step of communicating the secure container to the user, the matching and classification utility receiving usage information from a usage clearinghouse, the usage information relating to the user and, based at least in part on the usage information, the matching and classification utility assigning the user to the user class.

175. A method as in Claim 174, in which:

the usage information includes information relating to the user's usage of a second content object, the second content object being a member of the content class.

176. A method including the following steps:

at a first site, generating a secure container including a content object and having associated a first rule, the first rule at least in part governing use of the secure container contents;

communicating the secure container to a matching and classification utility located at a second site;

at the matching and classification utility, assigning the content object to a class, the assignment based at least in part on the nature or identity of the first rule;

selecting the content object for communication to a third site, the selection being based at least in part on the class; and

communicating the content object to the third site.

177. A method as in Claim 176, further including:

before the selection of the content object for communication to the third site, assigning the third site, or a user associated with the third site, to a user class, the selection of the content object for communication to the third site based at least in part on the user class.

178. A method as in Claim 177, further including:

before the assignment of third site or the third site user to the user class, receiving information from a clearinghouse relating to the third site or the third site user, the user class assignment based at least in part on the received information.

179. A method as in Claim 178, in which the information received from the clearinghouse relates to one or more uses of content made by the third site user.

180. A method as in Claim 179, in which the user class assignment is also based at least in part on an indication from the user regarding types of content objects the user is interested in receiving.

181. A method including the steps of:

at a matching and classification utility, receiving information from a usage clearinghouse, the information relating to usage patterns of a first user;

assigning the first user to a first user class, the assignment based at least in part on the usage clearinghouse information;

at the matching and classification utility, receiving audit trail information from a site associated with a second user, the audit trail information relating to a transaction entered into by the second user;

assigning the second user to the first user class based at least in part on the audit trail information;

at the matching and classification utility, receiving demographic information from a third user;

assigning the third user to the first user class based at least in part on the demographic information;

packaging information relating to the first user class in a first secure container having associated a first rule at least in part governing at least a portion of the secure container contents;

communicating the first secure container to a third party;

the third party using the information to select the first user, the second user and the third user;

based at least in part on the selection, the third party providing a content object to the first user, the second user and the third user.

182. A method as in Claim 181, further including:

assigning the third user to a second user class based at least in part on the third user demographic information, the first and second users not being assigned to the second user class.

183. A method as in Claim 181, in which the second user audit trail information is received by the matching and classification utility in a secure container having associated a second rule, and the matching and classification utility's use of the audit trail information is governed at least in part by the second rule.

184. A method as in Claim 183, in which the second rule allows the provision of summary identification information relating to the second user to the third party for the purpose of the third party selecting a content object for provision to the second user.

185. A method as in Claim 181, in which the content object is provided to the first user, the second user, and the third user in a second secure container, having associated a second rule, the second rule at least in part governing use of at least a portion of the second secure container contents.

Atty. Dkt. No.: 7451.0010-01
InterTrust Ref. No.: IT-14.1(US)

United States Patent Application

of

Victor H. Shear
David M. Van Wie
Robert P. Weber

for

*Systems and Methods for Matching, Selecting,
Narrowcasting, and/or Classifying Based on
Rights Management and/or Other Information*

004020-09066460

**SYSTEMS AND METHODS FOR MATCHING,
SELECTING, NARROWCASTING, AND/OR
CLASSIFYING BASED ON RIGHTS
MANAGEMENT AND/OR OTHER
INFORMATION**

FIELDS OF THE INVENTIONS

The inventions relate to electronic rights and transaction management. More particularly, the inventions relate to automated systems, methods and techniques for efficiently matching, selecting, narrowcasting, categorizing and/or classifying in a distributed electronic rights and/or other event and/or transaction management environment. For example, the inventions provide electronic computer based systems, methods and techniques for matching, classifying, narrowcasting, and/or selecting digital information describing people and/or other things. This matching, classifying, narrowcasting, and/or selecting can be based, at least in part, on elements of rights management information and/or one or more other categories of information -- wherein such information is used for efficient, trusted event management assuring the execution of one or more controls related to, including, for example, consequences of processing such digital information describing people and/or other things. The present inventions also provide systems and methods for efficiently determining class hierarchies, classification schemes, categories, and/or category schemes and/or the assignment of objects, persons and/or things to said class hierarchies, classification schemes,

categories, and/or category schemes using at least some rights management information.

BACKGROUND AND SUMMARY OF THE INVENTIONS

5 The modern world gives us a tremendous variety and range of options and choices. Cable and satellite television delivers hundreds of different television channels each carrying a different program. The radio dial is crowded with different radio stations offering all kinds of music, news, talk, and anything else one may care to listen
10 to. The corner convenience store carries newspapers from around the country, and a well stocked newsstand allows you to choose between hundreds of magazines and publications about nearly every subject you can think of. Merchandise from all corners of the world is readily available at the shopping mall or by mail order. You can pay
15 by check, in cash, or using any number of different kinds of credit cards and ATM cards.

 This tremendous variety is good, but it also presents problems. Sometimes, it is hard or inefficient for us to find what we want and need because there are too many things to evaluate and choose from,
20 and they are often located in too many places. We can waste a lot of time searching for the things we need or want at the right price, with the rights features, and at a particular time.

 Sometimes, we never find things that satisfy what we feel we need or want. This happens when we don't know what to look for,

how to look for it, or don't have the necessary assistance or tools to search successfully. For example, we may not know the best way of looking for something. Sometimes, we know what we are looking for but can't express or articulate it in ways that help us look. And
 5 sometimes, we don't even know what we are looking for. You may know you need something, know its missing, but never really know how to communicate to others what you are looking for. For example, someone who speaks only English may never find resources using Japanese or Spanish. In general, we often don't have the time
 10 or resources to look for all the things that would give us the most benefit or make us the most satisfied.

It's Hard To Find Mass Media Things You Want Or Need.

Figure 1A shows, as one example, how frustrating it can be to
 15 find anything to watch on the hundreds of television channels that may be available. The man in Figure 1A spends a lot of time "channel surfing," trying to find something he is interested in watching. He may be moderately interested in golf, but may not like the particular golf tournament or golf players being broadcast at 7
 20 o'clock on a particular channel. After flipping through other channels, he might think an action movie looks interesting only to find out after watching it for a while that he isn't really interested in it after all. A documentary on horses also seems interesting at first, but he finds it boring after watching it awhile because it doesn't give him
 25 the kind of information he is interested in. The whole process can be

frustrating and he may feel he wasted a lot of time. Figure 1B shows the man getting so frustrated at the wasted time and energy that he thinks that maybe watching television is just not worth it . What the man really needs is a powerful yet efficient way to find those things
 5 that most satisfy his desires -- that is, match his needs and/or his interests.

Our Mail Overloads Us With Things We Don't Want or Need

The same thing can happen with information sent to us in the
 10 mail. It can be fun to receive some kinds of mail, such as personal letters, or magazines and catalogs on topics of personal interest. Certain other mail, such as bills, may not be fun but are usually important. Unfortunately, our mailboxes are typically overflowing with yet another kind of mail commonly referred to as "junk mail."
 15 The person in Figure 2 finds his mailbox stuffed to the overflowing point with mail he never asked for and has absolutely no interest in. Most of this junk mail ends up unread and in the trash. However, it can take a long time to sort through all this mail to be sure you are only throwing out only the junk mail and not the good mail you are
 20 interested in or need. For example, it's sometimes hard to distinguish credit card bills from offers for new credit cards you don't need or want. Wouldn't it be useful if your mail could be automatically "cleaned" of the mail you had no interest in and you received only the mail you wanted or needed?

Sorting through things to identify things you might want, then selecting what you actually want, can be a frustrating and time consuming experience. For example, it wastes the time of the person who receives the junk mail, and it also wastes the time, money and effort of the people who spend their money to send mail to people hoping that they will buy their products.

As frustrating as finding and selecting may be to consumers, they often create even greater problems for businesses and people who want to locate or provide information, goods and services. It is often said, that in the world of business, "Information is Power" and "efficiency is the key to success." To find or sell the most relevant or useful information and to provide the ability to most efficiently allow business to operate at its best, we need easy-to-use tools that can help us navigate, locate, and select what matches our interests. In the modern world, it is often difficult to find out what different people like, and to supply people with the opportunity to select the best or most satisfying choices.

Past attempts outside the computer world to match up people with information, goods and/or services have had limited success. For example, attempts to "target" mass mailings may increase the chance that they will go to people who are interested in them, but the entire process is still very wasteful and inefficient. It is considered a good success rate to match the interests of only a few percent of the recipients of "junk" mail. Telemarketing campaigns that use the

telephone to reach potential consumers can be very expensive, very annoying to consumers who are not interested in the products being marketed, and very costly and inefficient. A much more ideal situation for all concerned is enabling businesses to send information only to individual consumers likely to find the information interesting, desirable, convincing, and/or otherwise useful. That way, businesses save time and money and consumers aren't unproductively hassled by information, phone calls, junk mail, junk e-mail and the like. However, right now it is extremely difficult to accomplish this goal, and so businesses continue to annoy consumers while wasting their own time, money, and effort.

Because of the Vast Amount of Information Available, Even Systems that Provide a High Degree of Organization May Be Difficult to Use or Access

You can find yourself wasting a lot of time finding things -- even in places where finding things is supposed to be easy. For example, a library is a place where you can find all sorts of useful information but can also waste a lot of time trying to find what you are looking for. Modern libraries can be huge, containing tens or even hundreds of thousands or millions of different books, magazines, newspapers, video tapes, audio tapes, disks, and other publications. Most libraries have an electronic or manual card catalog that classifies and indexes all of those books and other materials. This classification system is useful, but it often has significant limitations.

For example, normally a card catalog will classify materials based only on a few characteristics (for example, general subject, author and title). The boy in Figure 3 is looking for information on American League baseball teams during World War II for a high school report. The card catalog led to the general subject of baseball and other sports, but, looking at the catalog, he can't identify any books that seem to provide the specific information he wants to see, so he must rely on books classified as "histories of sports" or "histories of baseball." He can spend lots of time looking through the books on the shelves, going back to the card catalog, and going back to the shelves before he finds a reference that's reasonably helpful. He may need to go ask an expert (the librarian) who is familiar with the books the library has on sports and may know where to look for the information. Even then, the boy may need to flip through many different books and magazines, and look in many different places within the library before he finds the information he is looking for.

Finding Products You Want or Need Can Be Very Difficult and Time Consuming

The same kind of frustrating experience can happen when you shop for a particular kind of item. While some people enjoy shopping, and have fun seeing what is in various stores, many people dislike spending time shopping, searching for the best or most affordable item. And sometimes even people who like to shop don't have the time to shop for a specific item.

For example, the man in Figure 4 goes into a shopping mall looking for a tie to fit very tall people. He didn't wear a tie to work that day, but, at the last minute, an important meeting was scheduled for later that day and he needs to dress up. The shopping mall has a large variety of stores, each selling a range of merchandise. But the man may only have a short time to look. For example, he may be on his lunch break, and needs to get back to work soon. He can't spend a lot of time shopping. He may therefore need to rely on tools to help him identify where he wants to buy the tie. Perhaps he uses a mall directory that classifies the different stores in terms of what kinds of merchandise they sell (for example, clothing, books, housewares, etc.). Perhaps he asks at the malls help desk staffed by "experts" who know what is available in the shopping mall. But even these resources may not tell him where to buy Italian silk ties that are discounted and cost \$20. So he does the best he can with the available resources.

These Problems Are Worse in the Digital World

The electronic or digital world offers a rapidly growing, vast array of electronically published products and services. For example, computer superstores have a dizzying array of different software products. Furthermore, music is now published primarily in digital form on optical disks, and video will soon be published that way too. And, of particular interest related to certain of the inventions described by this document, the Internet now has millions of home pages with an overwhelmingly variety and quantity of digital

information, and, these millions of home pages, in turn, point or "link" to millions of other web pages as well.

Today, for example, you can use the Internet to:

- 5 • read electronic newspapers, books and magazines and see them on your computer screen;
- get music in electronic form and play it using your computer;
- send and receive electronic mail all over the world;
- 10 • download reports and other information compiled by governments, companies, industries, universities, and individuals;
- watch videos and animations;
- play games with "cyber-friends" located around the world;
- 15 • chat with individuals and groups who share at least some interests in common;
- participate in "virtual reality" worlds, games, and/or experiences;
- (offer to) buy, and/or (offer to) sell nearly anything;
- 20 and
- conduct electronic transactions and commerce.

Today on the Internet and you can also find nearly anything and everything you can possibly imagine, although finding exactly what you really want may be time consuming and frustrating. This is

because the Internet and World Wide Web provide perhaps the best example of an environment that is particularly hard to navigate.

There are an overwhelming number of choices -- too many to easily relate to or understand -- and many of which are terribly hard to find, even using the various Web searching "engines." The Internet is particularly exciting because it has the potential to provide to nearly everyone access to nearly every kind of information. Information can also come from an almost limitless variety of sources. But today, so much information on the Internet is superficial or useless, and too many choices can be more a curse than a blessing if you don't have meaningful, easy ways to eliminate all but a relatively few choices. And the situation will only become much worse as more Web sites appear, and as digital information is distributed in "objects" or "containers" providing enhanced security and privacy but possibly more difficult access and identifiability.

As time passes, more and more valuable and desirable information will be available in digital containers. However, unless tools are developed to solve the problem, there will be no efficient or satisfying means to sort through the potentially trillions of digital containers available on tens of millions of Web pages, to find containers satisfying a search or fulfilling an information need. Furthermore, existing information searching mechanisms typically provide no way to readily perform a search that matches against underlying commercial requirements of providers and users.

It Will Be Difficult to Find Rights Management Scenarios Matching Your Requirements

- If, for example, you have an auto repair newsletter and you want to create an article containing information on auto repair of Ford
- 5 Bronco vehicles, you may wish to look for detailed, three dimensional, step-by-step "blow-up" mechanical images of Ford Bronco internal components. Perhaps these are available from hundreds of sources (including from private individuals using new, sophisticated rendering graphics programs, as well as from
- 10 engineering graphics firms). Given the nature of your newsletter, you have decided that your use of such images should cost you no more than one penny to redistribute per copy in quantities of several thousand -- this low cost being particularly important since you will have numerous other costs per issue for acquiring rights to other
- 15 useful digital information products which you reuse and, for example, enhance in preparing a particular issue. You therefore wish to search and match against rights management rules associated with such products -- non-limiting examples of which include:
- cost ceilings,
 - 20 • redistribution rights (e.g., limits on the quantity that may be redistributed),
 - modification rights,
 - class related usage rights,
 - category related usage rights,

- sovereignty based licensing and taxation fees,
- import and export regulations, and
- reporting and/or privacy rights (you don't want to report back to the product provider the actual identity of your end users and/or customers.

5

If you can't match against your commercial requirements, you may be forced to waste enormous amounts of time sifting through all of the available products matching Ford Bronco internal components -- or you may settle for a product that is far less than the best available (settling on the first adequate product that you review).

10

Computers Don't Necessarily Make It Easier to Find Things

Anyone who has ever used the Internet or the World Wide Web knows that networks, computers and electronics, when used together, do not necessarily make the overall task of finding information easier. In fact, computers can make the process seem much worse. Most Internet users will probably agree that trying to find things you are interested on the Internet can be a huge time drain. And the results can be very unsatisfactory. The rapid growth rate of information available on the Web is continually making this process of finding desired information even harder. You can spend many hours looking for information on a subject that interests you. In most cases, you will eventually find some information of value -- but even using today's advanced computer search tools and on-line directories, it can

15

20

take hours or days. With the advent of the technology advances developed by InterTrust Technologies Corp. and others, publishers will find it far more appealing to make their valuable digital information assets available on-line and to allow extractions and
5 modifications of copyrighted materials that will vastly expand the total number of information objects. This will enormously worsen the problem, as the availability of valuable information products greatly expands.

It Is Usually Hard to Find Things On the Internet

10 There are many reasons why it is difficult to find what you want on the Internet. One key reason is that, unlike a public library, for example, there is no universal system to classify or organize electronic information to provide information for matching with what's important to the person who is searching. Unlike a library, it
15 is difficult on the Internet to efficiently browse over many items since the number of possible choices may be much larger than the number of books on a library shelves and since electronic classification systems typically do not provide much in the way of physical cues. For example, when browsing library shelves, the size of a book, the
20 number of pictures in the book, or pictures on magazine covers may also help you find what you are interested in. Such physical cue information may be key to identifying desired selections from library resources. Unfortunately, most digital experiences typically do not provide such cues without actually loading and viewing the work in
25 digital form.

Thus, another reason why the electronic or digital world can make it even harder to find information than ever before has to do with the physical format of the information. The digital information may provide few or no outward cues or other physical characteristics that could help you to even find out what it is -- let alone determine whether or not you are interested in it, unless such cues are provided through special purpose informational (for example, graphical) displays. On the Internet, everyone can be an electronic publisher, and everyone can organize their offerings differently -- using visual cues of their own distinctive design (e.g., location on a web page, organization by their own system for guiding choices). As one example, one publisher might use a special purpose graphical representation such as the video kiosk to support an electronic video store. Other publishers may use different graphical representations altogether.

Historically, there has been no particular need for consistent selection standards in conventional, non-electronic store based businesses. Indeed, it is often the unique display and choice selection support for customers' decision processes that make the difference between a successful store and a failure. But in the electronic world--where your choice is not among a few stores but rather is a choice among potentially thousands or even millions of possibly useful web sites and truly vast numbers of digital containers -- the lack of a consistent system for describing commercially significant variables that in the "real" world may normally be provided by the

display context and/or customized information guidance resource (catalog book, location of goods by size, etc.) seriously undermines the ability of digital information consumers to identify their most desirable choices.

- 5 Adding to this absence of conventional cues, the enormity of available choices made available in cyberspace means that the digital information revolution, in order to be practical, must provide profoundly more powerful tools to filter potentially desirable opportunities from the over abundance of choices. In sum, the
10 absence of the ability to efficiently filter from a dimensionally growing array of choices, can completely undermine the value of having such a great array of choices.

- 15 In the "real" world, commercial choices are based on going to the right "store" and using the overall arrays of available information to identify one's selection. However, as information in digital and electronic form becomes more and more important, the problem of relating to the vast stores of information will become a nightmare. For example, picture yourself in a store where each shopping aisle is miles long, and each item on the shelf is packaged in the same size
20 and color container. In an actual store, the product manufacturers put their products into brightly colored and distinctively shaped packages to make sure the consumer can readily find and select their product. These visual cues distinguish, for example, between a house brand

and a specific name brand, between low fat and regular foods, and between family size and small size containers.

On the Internet, a digital "store" is likely to be many stores with vast resources integrating products from many parties. If you were
5 limited to conventional classification and matching mechanisms, you would be unable to sift through all the material to identify the commercially acceptable, i.e., an item representing the right information, at the right price, providing license rights that match your interests. Certainly, if each digital package looks the same, you
10 are at a loss in making reasonable decisions. You can't tell one from another just by looking at it.

While information written on the "outside" of a digital package may be useful, you simply don't have the time to read all the packages, and anyway, each packager may use different words to
15 describe the same thing and the descriptions may be difficult to understand. Some people may write a lot of information on the outside of their package, and others may write little or nothing on the outside of the package. If there is no universal system agreed upon by everyone for defining what information should be written on the
20 outside of the package and how it should be formatted, using such a store would be painfully difficult even if you could limit the number of choices you were evaluating.

**There is a Need For Efficient and Effective Selection
Based, at Least in Part, on Rights Management
Information**

Unlike a real store where all breakfast cereals are shelved
5 together and all soft drinks are in the same aisle, there may be no
single, universal way to display the organization of all of the
information in a "digital store" since, by its nature, digital information
frequently has many implications and associated rules. For example,
there now exist highly developed rights management systems such as
10 described in U.S. Patent application Serial No. 08/388,107 of Ginter
et al., filed 13 February 1995, for "Systems And Methods For Secure
Transaction Management And Electronic Rights Protection (hereafter
"Ginter et al") – the entire disclosure (including the drawings) of
which is expressly incorporated into this application as if expressly
15 set forth herein. Many rules associated with any given piece of
digital information may, combinatorially, given rise to many, very
different, commercial contexts that will influence the use decisions of
different potential users in many different ways (e.g., cost, auditing,
re-use, redistribution, regulatory requirements, etc.).

20 No readily available systems developed for the digital
information arena provide similarly satisfying means that describe the
many commercial rules and parameters found in individual custom
catalogs, merchandise displays, product specifications, and license
agreements. Further, no readily available mechanisms allow

"surfing" across vast choice opportunities where electronic matching can single out those few preferred items.

As one example, picking an appropriate image may involve any or all of the following:

- 5 • price,
- republishing (redistribution) rights,
- rights to extract portions,
- certified usable in certain sovereignties (e.g.,
 pornographic content not allowed in Saudi Arabia),
- 10 • size,
- format, etc.,
- use and reuse administrative requirements (e.g., which
 clearinghouses are acceptable to rightsholders, what is
 the requirement for reporting usage information – is the
15 name of your customer required, or only the use class(es)
 or none -- is advertising embedded), and
- other features.

No previously readily available technology allows one to efficiently make selections based on such criteria.

20 By their nature, and using the present inventions in combination with, amongst other things, "Ginter et al", the packages in a digital store may be "virtual" in nature -- that is, they may be all

mixed up to create many, differing products that can be displayed to a prospective customer organized in many different ways. This display may be a "narrowcasting" to a customer based upon his matching priorities, available digital information resources (e.g., repository, property, etc.) and associated, available classification information. In the absence of an effective classification and matching system designed to handle such information, digital information of a particular kind might be just about anywhere in the store, and very difficult to find since the organization of the stores digital information resources have not been "dynamically" shaped to the matching interests of the potential customer.

These Inventions Solve These Problems

The present inventions can help to solve these problems. It can give you or help you to find the things you like, need or want. For example, it can deliver to you, (including narrowcasting to you), or help you to find:

- things that match your interests;
- things that match your lifestyle;
- things that match your habits;
- things that match your personality;
- things you can afford and/or accept your preferred payment method;
- things that help you in your work;
- things that help you in your play;

- things that help you to help others;
- things that other people who are similar to you have found helpful,
- things that fulfill the commercial objective or requirements of your business activities; and
- things that will make you happy and fulfilled.

The present inventions can expand your horizons by helping you to find interesting or important things, things that you enjoy, things that optimize your business efficiency, and things that help you make the best digital products or services you can -- even if you didn't know precisely what or how to look for what you may need. It can also help you by allowing things you didn't know existed or know enough to look for -- but that you may be interested in, want or need -- to find you.

15 **The Present Inventions Can Use "Metaclasses" to Take Multiple Classifications Into Account**

In some areas, multiple classifications may already exist and thus it is important for a consumer to be able to find what he or she is looking for while taking into account not only that there may be multiple classifications, but also that some classifications may be more authoritative than others. For example, Consumer Reports may be more authoritative on certain topics than more casual reviews published, for example, in the local weekly newspapers.

As another example, consider a book that rates restaurants according several factors, including, for example, quality, price, type of food, atmosphere, and location. In some locations there may be many guides, but they may review different sets of restaurants. One
 5 guide may rate a particular restaurant highly while one or more others may consider it average or even poor. Guides or other sources of ratings, opinions, evaluations, recommendations, and/or value may not be equally authoritative, accurate, and/or useful in differing circumstances. One consumer may consider a guide written by a
 10 particular renowned expert to be more authoritative, accurate, and/or useful than a guide reflecting consumer polls or ballots. However, another consumer may prefer the latter because the second consumer may perceive the tastes of those contributing opinions to be closer to his or her own tastes than those of the experts.

15 In accordance with the present inventions, a person may be able to find a restaurant that meets specified criteria – for example, the highest quality, moderately priced Cantonese and/or Hunan Chinese food located in Boston or Atlanta – while weighting the results of the search in favor of reviews from travel books rather than from the
 20 local newspapers. As this example indicates, the searching may be according to class of authoritative source (and/or classes sources considered authoritative by the consumer) instead of weighting individual reviewers or sources. Thus in accordance with the present inventions, search may be performed at least in part based on classes
 25 of classes, or "metaclasses."

The Present Inventions Can Make Choices Easier

One simple way to look at some examples of the present inventions is as a highly sensitive electronic "matchmaker" that matches people or organizations with their best choices, or even
5 selects choices automatically. The present inventions can match people and/or organizations with things and/or services, things with other things and/or services, and/or even people with other people. For example, the matching can be based on profiles that are a composite of preference profiles of one or more specific users, one or
10 more user groups, and/or organizations -- where the contribution of any given specific profile to the composite profile may be weighted according to the specific match circumstances such as the type and/or purpose of a given match activity.

Figure 5 shows a simplified example of an electronic
15 matchmaker that can match up two people with like interests. Sarah loves hiking, country and western music, gardening, movies and jogging. Mark loves movies, hiking, fast cars, country and western music, and baseball. The electronic matchmaker can look at the interests, personalities and/or other characteristics of these two people
20 and determine that they are compatible and should be together -- while maintaining, if desired, the confidentiality of personal information. That is, unlike conventional matchmaking services, the present inventions can keep personal information hidden from the service provider and all other parties and perform matching within a

protected processing environment through the use of encryption and protected processing environment-based matching analysis.

For example, certain matching of facts that are maintained for authenticity may be first performed to narrow the search universe.

- 5 Then, certain other matching of facts that are maintained for secrecy can be performed. For example, matching might be based on shared concerns such as where two parties who have a given disability (such as cancer or HIV infection) that is certified by an authority such as a physician who is certified to perform such certification; or the same
- 10 income level and/or bank account (as certified by an employer and/or financial authority such as a bank). Some or all of such secret information may or may not be released to matched parties, as they may have authorized and/or as may have been required by law when a match is achieved (which itself may be automatically managed within
- 15 a protected processing environment through the use of controls contributed by a governmental authority).

- Figure 5A shows an electronic matchmaker that matches an electronic publisher with mystery stories for his quarterly electronic mystery anthology, where the matching is based on price,
- 20 redistribution rights, editing rights, attribution requirements (attributing authorship to the author), third party rating of the writers quality, length of story, and/or the topical focus of the story (for example). Here, rule managed business requirements of publisher and writers are matched allowing for great efficiency in matching,

coordination of interests, and automation of electronic business processes and value chain activities.

The convenience of the "electronic matchmaker" provided in accordance with the present inventions extends to commerce in physical goods as well -- as illustrated in Figure 5b. In this non-limiting example, the electronic matchmaker is communicating to the consumer via the Internet and World Wide Web. The matchmaker has found the lowest quoted price for a Jeep sports utility model given, in this one example, a multitude of factors including:

- 10 • model,
- color,
- options package,
- availability, and
- discounts resulting from the consumer's membership in
- 15 certain classes (such as membership in the American Association of Retired Persons, membership in the American Automobile Association, and being a graduate of Stanford University).

Membership in these associations and alumni status may be conveyed or indicated by possession of a special electronic document called a

20 "digital certificate," "membership card," and/or other digital credential that warrants or attests to some fact or facts.

Thus, the electronic matchmaker provided in accordance with these inventions can also match people with things. Figure 6 shows two people, Harry and Tim. Harry loves sports most of all, but also wants to know a little about what is going on in the business world.

- 5 The business world is most important to Tim, but he likes to keep up with the baseball scores. The electronic matchmaker in accordance with these inventions can learn about what Harry and Tim each like, and can provide information to a publisher so the publisher can narrowcast a newspaper or other publication customized for each of
- 10 them. A newspaper company can narrowcast to Harry lots of sports information in his newspaper, and it can narrowcast to Tim mostly business information in his newspaper. In another example, Harry's newspaper may be uniquely created for him, differing from all other customized newspapers that emphasize sports over business
- 15 information. But information that Harry and Tim respectively want to maintain as authentic or secret can be managed as such.

- The electronic matchmaker can also match things with other things. Figure 7 shows how the electronic matchmaker can help a student put together a school project about big cats. The electronic
- 20 matchmaker can help the student locate and select articles and other material about various kinds of big cats. The electronic matchmaker can, for example, determine that different articles about tigers, lions and cheetahs are all about big cats – but that articles about elephants and giraffes are not about big cats. If there is a charge for certain
- 25 items, the electronic matchmaker can find only those items that the

student can afford, and can make sure the student has the right to print pictures of the big cats. The electronic matchmaker can help the student to collect this information together so the student can make a colorful poster about big cats.

- 5 The electronic matchmaker can match up all sorts of different kinds of things. Figure 8 shows the electronic matchmaker looking at three different objects. The matchmaker can determine that even though objects A and C are not identical, they are sufficiently similar that they should be grouped together for a certain purpose. The
- 10 electronic matchmaker can determine that for this purpose, object B is too different and should not be grouped with objects A and C. For a different purpose, the electronic matchmaker may determine that objects A, B and C ought to be grouped together.

15 **The Present Inventions Can Make Use of Rights Management Information**

- How does the electronic matchmaker find out the information it needs to match or classify people and things? In accordance with a feature provided by these inventions, the electronic matchmaker gets information about people and things by using automated,
- 20 computerized processes. Those processes can use a special kind of information sometimes known as rights management information. Rights management information may include electronic rules and/or their consequences. The electronic matchmaker can also use information other than rights management information.

An example of rights management information includes certain records about what a computer does and how it does it. In one simple example, records may give permission to read a particular news article if that the customer is willing to pay a nickel to purchase the
 5 article and that the nickel may be paid using a budget provided by a credit card company or with electronic cash. A customer might, for example, seek only news articles from providers that take electronic cash and/or process information with a certain information clearinghouse as described in U.S. Patent application Serial No.
 10 08/699,712 to Shear et al., filed 12 August 1996, for "Trusted Infrastructure Support Systems, Methods And Techniques For Secure Electronic Commerce Electronic Transactions And Rights Management" (hereafter "Shear et al") – the entire disclosure (including the drawings) of which is expressly incorporated into this
 15 application as if expressly set forth herein.

The Present Inventions Can Maintain Privacy

Figure 9 shows one way in which the electronic matchmaker can get information about a person. In this example, the electronic matchmaker asks Jill to fill out a computer questionnaire about what
 20 she likes. The questionnaire can also ask Jill what information she wishes to be maintained as authentic, and what information (e.g., encrypted by the system) may be used for secure matching only within a protected processing environment and can not be released to another party, or only to certain specified parties. The questionnaire

answering process may be directly managed by a protected processing environment to ensure integrity and secrecy, as appropriate.

For example, the questionnaire may ask Jill whether she likes baseball and whether she is interested in volcanoes. The electronic matchmaker can also ask Jill if it is okay to look at records her computer maintains about what she has used her computer for in the past. These computer records (which the computer can maintain securely so that no one can get to them without Jill's permission) can keep a history of everything Jill has looked at using her computer over the past month and/or other time period – this process being managed, for example, through the use of a system such as described in the "Ginter et al."

Looking at Figure 10, Jill may have used her computer last week to look at information about baseball, volcanoes and Jeeps. With Jill's permission, the electronic matchmaker can employ a protected processing environment 154 (schematically shown here as a tamper-resistant "chip" within the computer – but it can be hardware-based, software-based, or a combination of hardware and software) to look at the computer's history records and use them to help match Jill up with other kinds of things she is or may be interested in. For example, the electronic matchmaker can let an electronic publisher or other provider or information gatherer (e.g., market survey conductor, etc.) know that Jill is interested in team sports, geology and sports utility vehicles with or without more revealing detail -- as managed

by Jill's choices and/or rights management rules and controls
 executing in her computer's protected processing environment 154.
 The provider can send information to Jill – either automatically or at
 Jill's request – about other, related things that Jill may be interested
 5 in.

Figure 11 shows an example of how rights management and
 other information Jill's computer maintains about her past usage can
 be useful in matching Jill up with things she may need or want. The
 computer history records can, for example, show that Jill looked at
 10 hockey information for three hours and football information for five
 hours during the past week. They can indicate that Jill uses a
 Discover credit card to pay for things, usually spends less than \$10 per
 item, averages \$40 per month in such expenses, and almost never
 buys new programs for her computer.

15 The electronic matchmaker can, with and subject to Jill's
 permission, look at and analyze this information. As one example,
 the electronic matchmaker can analyze relevant rules and controls
 provided by third parties who have rights in such information --
 where such rules are controlled, for example, by Jill's computer's
 20 protected processing environment 154. It can also look at and
 analyze Jill's response to computer questionnaires indicating that she
 likes baseball and football. The electronic matchmaker can, based on
 all of this information, automatically select and obtain videos and/or
 other publications for Jill about team sports and that cost less than

\$10 and that accept payment using a Discover card, so that Jill can preview and select those in which she may have a particular interest and desire to acquire.

Figure 12 shows that the electronic matchmaker can take into
5 account computer history records for lots of different people. The electronic matchmaker can work with other rights management related computer systems such as "usage clearinghouses" (non-limiting examples of which are described in each of "Ginter et al" and "Shear et al") to efficiently collect rights management related
10 information. The ability to collect history records from many different people can be very useful. For example, this can allow the electronic matchmaker to distinguish between things that are very popular and things that are not so popular.

The present inventions provide great increases in efficiency and
15 convenience. It can save you a lot of time and effort. It can allow computers to do a lot of the work so you don't have to. It can allow you to compete with larger businesses -- and allow large business to function more efficiently -- by allowing the location of resources particularly appropriate for certain business activities. You can
20 delegate certain complex tasks to a computer, freeing you to be more productive and satisfied with electronic activities. These automated processes can be "smart" without being intrusive. For example, they can learn about your behavior, preferences, changing interests, and even your personality, and can then predict your future interests based

on your past behavior and interest expressions. These processes can ensure confidentiality and privacy – so that no one can find out detailed information about you without your consent. Across the full range of personal and business activities, the present inventions allow
 5 a degree of basic efficiency, including automation and optimization of previously very time consuming activities, so that interests and possible resources are truly best matched.

The present inventions handle many kinds of important issues and addresses the widest range of information and rights and
 10 automation possibilities. For example, the present inventions are capable of handling (but are not limited to):

- consumer information;
- computer information;
- business information;
- 15 • entertainment information;
- other content information;
- information about physical products;
- all other kinds of information.

It can reflect and employ all kinds of rights to optimize
 20 matching processes, including:

- content rights;
- privacy rights;
- governmental and societal rights;
- provider rights;

- distributor rights;
- consumer rights;
- workflow rights;
- other value chain participant rights;
- 5 • work flow rights;
- business and personal rights and processes of all kinds.

It can employ all kinds of parameter information, including:

- budget,
- 10 • pricing
- redistribution
- location (of party, item, etc.)
- privacy
- identity authenticity and/or specificity
- 15 • any other parameter information.

Pricing (for example the price of a specific item) can be used in matching based upon price per unit and/ or total price for a volume purchase, price for renting, right to redistribute, cost for redistributing items, etc.

- 20 Privacy can be used for establishing matching contingent upon usage reporting requirements for viewing, printing, extracting, dedistributing, listening, payment, and/or requiring the reporting of

other information such as personal demographics such as credit worthiness, stored value information, age, sex, marital status, race, religion, and/or usage based generated profiling information based materially upon, for example, a users history of usage of electronic
5 content and/or commercial transactions, etc.

Identity can be used for matching based upon, for example, such as the presence of one or more specific, class, and/or classes of certificates, including, for example, specific participant and/or group of participant, including value chain certificates as described in
10 "Shear et al".

With the inventions described herein, commercial requirement attributes embodied in rules (controls and control parameter data) are employed in classification structures that are referenced by search mechanisms, either, for example, directly through reading rule
15 information maintained in readable (not encrypted) but authentic (protected for integrity) form, through reading rule information maintained securely, through processes employing a protected processing environment 154 of a VDE node, and/or through the creation of one or more indexes and/or like purpose structures, that,
20 directly, and/or through processes employing a protected processing environment 154, automatically compile commercial and other relevant (e.g., societal regulatory information such as a given jurisdiction's copyright, content access and/or taxation regulations) for classification/matching purposes.

The present inventions can employ computer and communication capabilities to identify information, including:

- topical classification such as described by conventional library classification systems,
- 5 • commercial characterizations -- including commercial parameter data such as pricing, size, quality, specific redistribution rights, etc.,
- creator (e.g., a publisher or manufacturer), distributor, societal, user, and other participant interests information,
- 10 • information generated by automated profiling of any and all of such parties or collections of parties,
- matching (including electronically negotiating a match) between the interests of any of such parties,
- where appropriate, the use of statistical procedures, expert systems, and artificial intelligence tools for
- 15 profiling creation and/or analysis, matching, and/or negotiation.

The present inventions thus provide for optimal user, provider, and societal use of electronic cyberspace resources (for example,

20 digital information objects available across the Internet, sent by direct broadcast satellite, transmitted over a cable TV system, and/or distributed on optical disk).

001020-0920000

5
10
15
20
25

- 5
10
15
20
25

market share, and/or subject governmentally and/or other societally imposed rules and/or integrity guaranteed descriptions, including any associated regulatory requirements, such as societal requirements granting and/or reporting access to information, for example, information on how to create a nuclear bomb to a confidential government auditing agency (this allowing free access to information while protecting societal rights);

- any information descriptive of a user and/or department and/or organization and/or class of users and/or departments and/or organizations (including, for example, such descriptive information encrypted and/or guaranteed for integrity) wherein such information may include, for example, name, physical and/or network and/or cyber-wide logical network location, organizational and/or departmental memberships, demographic information, credit and/or trustworthiness information, and profile preference and usage history information, including any generated profile information reflecting underlying preferences, and/or classes based on said descriptive information and/or profiles.

Some Of The Advantageous Features And Characteristics Provided By The Present Inventions

The classification, matching, narrowcasting, analysis, profiling, negotiation, and selection capabilities of the present inventions

- 5 include the following capabilities (listed items are not mutually exclusive of each other but exemplary samples):

- 10 • Enables highly efficient provision of classes of information, entertainment, and/or services to classes of individuals and/or entities that have (and/or may obtain) the right(s) to such information and are likely to find identified information interesting, useful, and/or entertaining.
- 15 • The present inventions also provide systems and methods for efficiently determining class hierarchies, classification schemes, categories, and/or category schemes and/or the assignment of objects, persons and/or things to said class hierarchies, classification schemes, categories, and/or category schemes using at least some rights management information.
- 20 • Helps systems, groups, and/or individuals classify, locate, and/or obtain specific information and/or classes of information made available through so-called "publish and subscribe" systems and methods using, among other things, subject-based addressing and/or messaging-based protocol layers.
- 25

- 5
- Provides fundamentally important commercial and societal rules based filtering to identify desired electronic information and/or electronic information containers through the use of classification structures, profiling technology, and matching mechanisms that harness the vast information opportunities in cyberspace by matching the information needs of users against commercial and/or societal rules related to the use of available information resources, including, for example, commercial and/or societal consequences of digital information use imposed as provider requirements and specified through the use of, and enforced by the use of, a trusted rights management system such as described in "Ginter et al".
- 10
- 15
- Enables content creators and/or distributors to efficiently "stock the shelves" of retail electronic content outlets and similar merchandisers (both electronic and hard goods) with products and/or services most likely to be purchased and/or used by the customers of such merchandisers. This includes both identifying and "stocking" the most desirable products and/or other user desired resources and optimally presenting such products and/or other
- 20

resources in a manner optimized for specific users and/or user classes.

- 5 • Matching may be based on history of matching, that is, matching derived at least in part from previous matching, one non-exhaustive example of which includes learned matching for increasing efficiency.
- 10 • Enables matching for value chains where the matching is against a plurality of co-participating value chain parties requirements and/or profiles against match opportunities, and/or matching by matches comprised of match input and/or aggregation of match rule sets of providers used to "dock" with one or more user needs, interests, requirements match sets.
- 15 • Helps match persons and/or things using fuzzy matching, artificial intelligence (e.g., expert systems), and other methods that that match using plural match sets from providers and/or receivers.
- 20 • Makes search easier by using smart agents that match at least in part using at least one class.
- 25 • Helps bring buyers and sellers together through cross matching, where both parties offer to provide and/or receive content and/or physical goods for consideration, including barter matching and negotiated barter and other kinds of matching.

- 5

 - Helps potential customers find those members (e.g., objects such as digital information containers) of any one or more classes of content most useful, entertaining, and/or interesting to them.
- 10

 - Facilitates organizations securely and efficiently acquiring and distributing for internal use certain classes of content available from external providers and/or more securely and/or efficiently managing classes of their own content, including being able to authorize certain classes of employees to use specified classes of internal and/or external content.
- 15

 - Efficiently supporting matching between users and digital information where participants in a chain of handling and control have specified rules and usage consequences for such digital information that may depend on class membership, for example, on class(es) of content and/or class(es) of value chain participants and/or classes of electronic events, wherein such participants include, for example, users
- 20

 - and/or participants contributing rules and consequences.
- 25

 - Enables first individuals and/or organizations to locate efficiently other individuals, organizations, products, and/or services who have certain characteristics that corresponds to such first individuals' and/or

organizations' interests, including interests generated by profiling information locally gathered through local event auditing at a VDE installation.

- 5 • Facilitates businesses informing a customer about things of special interest to her or him, such as classes of goods, services, and/or content, including directing such information to a customer at least in part based on profiling information locally gathered at a VDE installation through local event auditing at a VDE
10 installation.
- 15 • Allows trading companies to match suppliers of certain classes of goods and/or services with those who desire to purchase and/or use those classes of goods and/or services, wherein such matches may include fulfilling a commercial business interaction and may further include one or more sequences of matches and/or nested matches (a sequence and/or
20 grouping of matches within a given organization or group, wherein such matches may be required to occur in a certain order and/or participate along with other matches in a group of matches before a given match is fulfilled).
- 25 • Enhances equity portfolio management by making easier for traders to identify those equities having certain desired characteristics, such as belonging to

the class of equities that will have the greatest positive effect on the value of the trader's portfolio given certain classes of information and assumptions.

Such matches may take into account information external to the fulfilment of a given trade, for example, one or more certain other market or specific variable thresholds must be met before an equity is traded, such as a certain rise in the an index stock value of, and/or revenue of, certain one or more network hardware suppliers before a certain quantity of equity is purchased at a certain price for stock of a certain network hardware supplier raw network component manufacturer, and wherein, for example, such determinations can be performed highly efficiently at a user VDE installation as the point of control, where such node receives such trusted information in, for example, VDE containers, as is necessary for a control decision to occur to purchase such equity of such network hardware supplier raw component manufacturer.

- Makes easier automated foreign currency exchange by enabling currency traders to identify members of the class of possible trades and/or conversions that are likely to produce the best returns and/or minimize losses.

- Helps consumers and organizations manage their affairs more efficiently and effectively and helps providers of services by automatically matching users with services that meet certain specified criteria, such as, for example, U. S. and Swiss banks offering the highest interest rates on certain time based classes of bank deposit instruments.
- Enables distributors of software and other content to identify one or more classes of users who are most likely to be interested in purchasing or otherwise using certain classes of software.
- Enables rightsholders to employ rules and/or usage consequences dependent on membership in one or more classes where class membership may be indicated by possession of a special digital document called a "certificate."
- Enables rightsholders to employ rules and/or usage consequences at least partially dependent on roles and responsibilities within an organization, where those roles and responsibilities may be indicated by possession of a digital certificate, digital membership card, and/or other digital credential.
- Facilitates more efficient automation of manufacturing and other workflow processes by, for example, matching certain manufacturing steps and/or

processes with performance parameter data associated with available classes of equipment capable of performing those steps and/or processes.

- 5 • Makes easier the administration and enforcement of government and/or societal rights by, for example, providing matching means for automatically applying certain classes of tax rules to appropriate classes of sales and other transactions.
- 10 • Enables altering the presentation of information and/or other content depending on the matching between preferences of the user and one or more classes of content being presented.
- 15 • Enables processing or altering (narrowcasting) of an event (e.g., the presentation of information and/or other content), for example, dynamically adjusting the content of an event, in response to a matching among the preferences and/or reactions of a user and/or user group, one or more classes of content being processed through one or more events, one or more classes of
20 one or more users participating in and/or otherwise employing the one or more events, and/or event controls (i.e., rules and/or parameter data).
- 25 • Allows the rules and usage consequences and the presentation of information to vary according to the difficulty of the information, including, for example,

004020-6966660

adjusting the difficulty of an electronic game so that it is neither too frustratingly difficult nor too easy to use.

- 5 • Enables a user to efficiently locate content in one or more particular classes, where class is defined at least in part by weighted topical classification, where, for example, a document or other object is classified in one or more categories where at least one category reflects the absolute or relative attention given to that class in the object being classified.
10
- Facilitates users' creation of a new document from parts of two or more documents, where at least one of such parts is identified and/or retrieved based upon matching the part's membership in one or more
15 classes identified by trusted, commercial controls employed through the use of a rights management system.
- Enables users to search for, locate, and use only those parts of a document that belong to one or more
20 specified classes, including those parts having certain commercial controls, for example, reflecting acceptable usage restrictions and/or pricing.
- Enhances search and retrieval by creating new classes of content discriptors that incorporate various

disparate standards for content description and/or location.

- Allows consumers to easily locate services having certain specified characteristics, for example, gambling services offering the most favorable odds and/or specified rules for a particular game or games.
- Helps consumers obtain certain classes of tickets to certain classes of events.

The above capabilities, and others described in this application, are often ideally managed by distributed commerce nodes of a distributed, rights management environment embedded in or otherwise connected to the operating system clients of a distributed computing environment such as described in "Ginter et al" and further described in "Shear et al", and employing, for example, rules, integrity management, container, negotiation, clearinghouse services, and trusted processing capabilities described in "Ginter et al" and "Shear et al".

The Present Inventions Make Use Of Many Kinds Of Information And/Or Data

As discussed above, these inventions provide, among other things, matching, classification, narrowcasting, and/or selection based on rights management and other information. In particular preferred examples, these matching, classification, narrowcasting, and/or

selection processes and/or techniques may be based at least in part on rights management information. The rights management information may be an input to the process, it may be an output from the process, and/or the process can be controlled at least in part by rights

- 5 management information. Information in addition to, or other than, rights management information may also be an input, an output, and/or a basis for controlling, the process and/or techniques.

Rights management information may be directly or indirectly inputted to the matching, classification and/or selection process. For
 10 example, rights management controls, rules and/or their consequences may be an input. Examples of such controls and/or rules include object registration related control set data, user related control set data and/or computer related control set data. In addition or alternatively, information provided based on control sets or rules and their
 15 consequences may be inputted. The following are examples of such information that may be provided based, for example, on rules and consequences:

- information exhaust;
- user questionnaires,
- 20 • audit trail related information;
- aggregated usage data;
- information measuring or otherwise related to user behavior;
- information measuring or otherwise related to user
 25 preferences;

- information measuring or otherwise related to user personality;
- information measuring or otherwise related to group behavior;
- 5 • information measuring or otherwise related to group preferences;
- information measuring or otherwise related to group culture
- 10 • information measuring or otherwise related to organizational behavior;
- information measuring or otherwise related to organizational preferences;
- information measuring or otherwise related to organizational culture;
- 15 • information measuring or otherwise related to institutional behavior;
- information measuring or otherwise related to institutional preferences;
- information measuring or otherwise related to institutional culture;
- 20 • information measuring or otherwise related to governmental behavior;
- information measuring or otherwise related to governmental preferences;

- information measuring or otherwise related to governmental culture;
- information measuring or otherwise related to societal behavior;
- 5 • information measuring or otherwise related to societal preferences;
- information measuring or otherwise related to societal culture;
- object history related information;
- 10 • other types of information;
- any combinations of information including, some, all or none of the information set forth above.

The processes, techniques and/or systems provided in accordance with these inventions may output rights management
 15 related information such as, for example:

- one or more control sets;
- various rules and/or consequences;
- information used by control sets;
- certificates;
- 20 • other rights management information.

In accordance with various preferred embodiments provided by these inventions, information other than rights management information may also be used, at least in part, as an input, output and/or to control the matching, classification, narrowcasting, and/or

selection processes, systems and/or techniques. Examples of such information include:

- content object information;
 - full text
 - portions of objects
 - portions of sub-objects
 - abstracts
 - metadata
 - other content object related information
- user information
 - census information
 - purchasing habits
 - credit and financial transaction related information
 - governmental records
 - responses to questionnaires
 - survey results
 - other user information
- computer related information
 - identification information
 - configuration information
 - other computer related information
- combinations of information.

004020 09286400

Matching/Classifying/Selection

Systems, methods and techniques provided in accordance with these inventions can classify a variety of types of things including, for example:

- people
 - computers
 - content
 - events
 - transactions
- 10
- objects of all types
 - combinations of things;
 - combinations of people and things.

The matching, classifying and/or selecting processes provided in accordance with these inventions are very flexible and useful. For example, they may be used to associate people with information, information with other information, people with other people, appliances with people, appliances with information, and appliances with other appliances. The present inventions in their preferred examples can associate any kind of information, object or thing with any other kind of information, object or thing.

Different Associations Between Classes and Rights

The processes, systems and/or techniques provided in accordance with these inventions can provide and/or take into account many different kinds of associations between classes and rights. For

example, they can look at what rights are available to a user, computer, data structure or any other object. They can also look to rights selected by an object (for example, the subset of rights a user has chosen or otherwise identified). Alternatively or in addition, they
 5 can look to rights that have been exercised by a user or in conjunction with an object or other thing, and they can look to the consequences of exercising such a right(s).

**Embodiments in Accordance With the Present
 Inventions Can Be Used to Define Classes Based on Uni-
 10 Dimensional and/or Multi-Dimensional Attributes and/or
 Characteristics**

Example processes, systems and/or techniques provided in accordance with these inventions can be used to define classes based on uni-dimensional and/or multi-dimensional attributes and/or
 15 characteristics. Any one or more attributes can be used. The attributes and/or characteristics can be flexibly defined. They may define groups or classes containing elements sharing certain attributes in common. There can, for example, be a spectrum of classification that takes into account gray areas as to whether a particular person or
 20 thing possesses a certain one or a number of particular attributes and/or characteristics. Or classification may have a higher degree of certainty or definition. For example, a process can test to determine whether particular people or things are inside or outside of particular classes or groups based on one or a number of attributes or
 25 characteristics (for example, whether you live in Denver, are under the age of 25 and are single). In accordance with additional specific

features provided by these inventions, there may be a minimum number of different classes set up to "cover" a particular situation – with every person or thing either being within or outside of a given, disjoint class or group.

5 Preferred Examples In Accordance With The Present Inventions Are Extensible to Accommodate Changing Conditions

The systems, methods and/or techniques provided by these inventions are extensible to accommodate changing conditions. For example, they can be made to readily adapt to changes in rules, consequences, topics, areas and/or subjects pertaining to groups such as, for example categories, and any other variable. Furthermore, partially and/or entirely new variables may be introduced to one or more existing sets of variables -- for example, to extend or otherwise modify a model to account for additional variables, to apply a new strategy, to adapt to new network and/or installation circumstances, to adapt to new user factors, to change analysis and/or other processing characteristics, and so on.

20 Preferred Examples In Accordance With The Present Inventions Are Compatible With Pre-Existing or Any New Classification Techniques or Arrangements

The example systems, methods and/or techniques provided by these inventions can be made fully compatible with any classification and/or categorization means, method, process, system, technique, algorithm, program, and/or procedure, presently known or unknown,

for determining class and/or category structures, definitions, and/or hierarchies, and/or the assignment of at least one object, person, thing, and/or member to at least one class and/or category, that without limitation may be:

- 5 • implemented by computer and/or other means; and/or
- based upon discrete and/or continuous mathematics; and/or
- using nominal, ordinal, interval, ratio and/or any other measurement scale and/or measurement mode; and/or
- 10 • including parameter data; and/or
- entail linear and/or non-linear estimation methods; and/or
- any other methods.

For example, classification can be performed using any or all of
15 the following example classification techniques:

- Statistical techniques that identify one or more clusters of cases sharing similar profiles and/or features, including any of the family of cluster analysis methods, for example, those described in
20 Hartigan (Hartigan, J. A., Clustering Algorithms, New York: Wiley, 1975);
- Methods for numerical taxonomy, for example, as described, for example, by Sneath and Sokal (Sneath, Peter H.A. and Robert R. Sokal, Numerical

Taxonomy: The Principals and Practice of Numerical Classification, San Francisco: W.H. Freeman, 1973);

- 5 • Any of the methods for cluster analysis, factor analysis, components analysis, and other similar data reduction/classification methods, for example, those implemented in popular statistical and data analysis systems known to those skilled in the arts, for example, SAS and/or SPSS;
- 10 • Pattern classification techniques, including components analysis and neural approaches, for example, those described by, for example, Schurmann (Schurmann, Jurgen, Pattern Classification: A Unified View of Statistical and Neural Approaches, New York: John Wiley & Sons, 1966);
- 15 • Statistical techniques that identify one or more underlying dimensions of qualities, traits, features, characteristics, etc., and assign parameter data indicating the extent to which a given case has, possesses, and/or may be characterized by the
- 20 underlying dimension, factor, class, etc. and/or result in the definition of at least one class and/or the assignment of at least one case to at least one class, for example, as described by Harman (Harman, Harry H., Modern Factor Analysis, 3rd ed. rev., Chicago: University of Chicago Press), and/or as implemented
- 25

by SAS and/or SPSS and/or other statistical analysis programs.

- 5

• Statistical methods that employ fuzzy logic and/or fuzzy measurement and/or whose assignment to at least one class entails probabilities different from 1 or zero.
- 10

• Bayesian statistical classification techniques that use estimates of prior probabilities in determining class definitions and/or the assignment of at least one case to at least one class;
- 15

• Any statistical and/or graphical classification and/or data reduction method that uses rotation of reference axes, regardless of whether orthogonal or oblique rotations are used, for example, as described in Harman, and as implemented in SAS and/or SPSS and/or other statistical programs;
- 20

• Statistical methods for two and three way multidimensional scaling, for example, the methods described by Kruskal and Wish (Kruskal Joseph B. and Myron Wish, Multidimensional Scaling, Beverly Hills, CA: Sage Publications, 1978), and/or by Shepard, et al. (Shepard, Roger N., A. Kimball Romney, and Sara Beth Nerlove, Multidimensional Scaling: Theory and Applications in the Behavioral Sciences, New York: Seminar Press, 1972);

25

- Knowledge based approaches to classification, for example, as described by, for example, Stefik (Stefik, Mark, "Introduction to Knowledge Systems," San Francisco: Morgan Kauffman, 1995); and
- 5 • any other classification techniques or arrangements pre-existing or yet to be developed.

**Preferred Examples In Accordance With The Present
Inventions Are Fully Compatible With A Wide Array
of Technologies Including the Distributed Commerce
10 Utility System and the Virtual Distribution
Environment**

Systems, methods and/or techniques provided in accordance with these inventions build upon and can work with the arrangements disclosed in "Ginter et al"; "Shear et al"; and other technology related
15 to transaction and/or rights management, security, privacy and/or electronic commerce.

For example, the present inventions can make particular use of the security, efficiency, privacy, and other features and advantages provided by the Virtual Distribution Environment described in
20 "Ginter et al".

As another example, a matching and classification arrangement can be constructed as a distributed commerce utility system as described in "Shear et al". The present inventions can work with other distributed commerce utility systems, and can enhance or be a
25 part of other commerce utility systems.

By way of non-exhaustive, more specific examples, the present inventions can be used in combination with (and/or make use of) any or all of the following broad array of electronic commerce technologies that enable secure, distributed, peer-to-peer electronic

5 rights, event, and/or transaction management capabilities:

- a "VDE" ("virtual distribution environment") providing, for example, a family of technologies by which applications can be created, modified, and/or reused;
- 10 • a standardized control and container environment which facilitates interoperability of electronic appliances and efficient creation of electronic commerce applications and models;
- a programmable, secure electronic transaction management foundation having reusable and extensible executable components;
- 15 • seamless integration into host operating environments of electronic appliances or direct employment of such technologies in electronic commerce applications;
- cyberspace digital content rights and transaction management control systems that may operate in whole or in part over Internets, Intranets, optical media and/or over other digital communications media;
- 20 • support of an electronic "world" within which most forms of electronic transaction such as content usage,

distribution, auditing, reporting, and payment activities can be managed;

- 5 • Transaction Operating Systems (operating systems that have integrated secure, distributed, and programmable transaction and/or event management capabilities);
- Rights Operating Systems (operating systems that have integrated, distributed, and programmable rights management capabilities);
- secure content container management;
- 10 • clearinghouse functions related to content usage;
- overall electronic commerce architectures that provide electronic commerce automation through the use of secure, distributed digital events management;
- the general enablement of traditional commerce behavior in the digital commerce world;
- 15 • enhanced inherent, distributed efficiencies of conventional commerce practices with powerful, reliable electronic security, and with the programmability and electronic automation efficiencies made possible by modern computing;
- 20 • trusted operation of a freely configurable, highly efficient, general purpose digital marketplace in which

parties "come together" to establish commercial relationships;

- 5 • support of "real" commerce in an electronic form (that is, the progressive creation of commercial relationships that form, over time, a network of interrelated agreements representing a value chain business model);
- 10 • enabling content control information to develop through the interaction of (and/or negotiation between) securely created and independently submitted sets of content and/or appliance control information;
- 15 • interconnection of appliances providing a foundation for much greater electronic interaction and the evolution of electronic commerce;
- a variety of capabilities for implementing an electronic commerce environment;
- a neutral, general purpose platform for commerce;
- an architecture that avoids reflecting specific distribution biases, administrative and control perspectives, and content types;
- 20 • a broad-spectrum, fundamentally configurable and portable, electronic transaction control, distributing, usage, auditing, reporting, and payment operating environment;

- systems and methods that uniquely enable electronic commerce participants to protect their interests during the sequence of activities comprising an electronic commerce model;
- 5 • ability of commerce participants to assure protection by specifying rules and controls that monitor and enforce their interests during the processing of remote commerce events;
- 10 • permitting commerce participants to efficiently participate in, and manage, the distributed electronic activities of a digital value chain;
- allowing commerce model participants to, for example, securely and cooperatively govern and automate the distributed electronic activities comprising their
- 15 collective electronic business models;
- allowing commerce model participants to securely contribute electronic rules and controls that represent their "electronic" interests;
- 20 • rules and controls that extend a "Virtual Presence™" through which the commerce participants govern remote value chain activities according to their respective, mutually agreed to rights;

- a Virtual Presence taking the form of participant specified electronic conditions (rules and controls) that must be satisfied before an electronic event may occur;
- 5 • rules and controls that enforce the party's rights during "downstream" electronic commerce activities;
- control information delivered by, and/or otherwise available for use with, the VDE content containers constituting one or more "proposed" electronic agreements which manage the use and/or consequences of the use of such content and which can enact the terms and conditions of agreements involving multiple parties and their various rights and obligations;
- 10 • rules and controls from multiple parties forming aggregate control sets ("Cooperative Virtual Presence™") that ensure that electronic commerce activities will be consistent with the agreements amongst value chain participants;
- 15 • control sets defining the conditions which govern interaction with protected digital content (disseminated digital content, appliance control information, etc.);
- 20 • conditions used to control not only digital information use itself, but also the consequences of such use to protect the individual interests of commerce participants

004020:69286f60

and form cooperative, efficient, and flexible electronic commerce business models;

- true, efficient electronic cooperative governance of value chain activities;
- 5 • empowering each commerce model participant to securely deliver, and persistently maintain control over, the rules and controls they contributed specifying constraints on, and consequences of, electronic conduct;
- 10 • extending Cooperative Virtual Presence over time and involving the execution of controls, and the use of content, at physically dispersed locations, such as Internet user sites;
- 15 • a chain of handling and control in which dispersed locations are bound together through the use of secure communication techniques and unique, secure digital container technology;
- 20 • ability to preserve the rights of parties through a series of transactions which may occur at different times and different locations;
- extending the ability of electronic content providers to control the use of proprietary information;
- allowing content providers to limit use to authorized activities and amounts;

- allowing participants (e.g., actors, directors, script and other writers, musicians, studios, publishers, distributors, retailers, advertisers, credit card services, content end-users, and others) involved in a business model to have the ability to embody their range of agreements and requirements, including use limitations, into an "extended" agreement comprising an overall electronic business model;
- representing such an extended agreement by electronic content control information which can automatically enforce agreed upon rights and obligations;
- a competitive, general purpose electronic commerce architecture supporting the distributed, secure "unmanned" electronic interaction;
- distributing such capabilities across networks and involving the sequence (or web) of distributed activities underlying electronic value chains;
- cooperative electronic governance of distributed electronic commerce processes that optimizes electronic commerce value propositions;
- the capability of electronically, remotely representing the interests of commerce participants to support efficient, flexible, commerce model automation;

- 5 • enabling rules and controls that are independently contributed by multiple parties to securely merge together and form the collective rules and controls sets that reflect the electronic commerce agreements between parties;
- using rules and controls sets to collectively, automatically, govern remote electronic conduct;
- securely managing the integration of control information provided by two or more parties;
- 10 • constructing electronic agreements between VDE participants that represents a "negotiation" between the control requirements of two or more parties and enacts the terms and conditions of a resulting agreement;
- 15 • ensuring and/or enforcing the rights of each party to an electronic agreement regarding a wide range of electronic activities related to electronic information and/or appliance usage;
- 20 • the ability to broadly support electronic commerce by securely managing independently delivered VDE component objects containing control information (normally in the form of method, data, or load module VDE objects);
- using independently delivered control information to negotiate with senior and other pre-existing content

control information to securely form derived control information;

- ensuring that all requirements specified by derived control information are satisfied before VDE controlled content is accessed or otherwise used;
- ensuring that all load modules and any mediating data which are listed by the derived control information as required are available and perform their required function;
- use of independently delivered control components to allow electronic commerce participants to freely stipulate their business requirements and trade offs;
- allowing electronic commerce, through the various control requirements stipulated by VDE participants, to evolve into forms of business which are the most efficient, competitive and useful -- much as with traditional, non-electronic commerce;
- providing commerce participants with the ability to freely fashion the chains of handling and control pathways that protect data and processes and the freedom to shape the models within which their Virtual Presence operates -- allowing commerce participants to optimally formulate their electronic commerce value propositions;

- VDEs configured to support the various underlying agreements between parties that define important electronic commerce pathways of handling for electronic content, content and/or appliance control information, content and/or appliance usage information and payment and/or credit;
- allowing content creators and other providers to specify the pathways that, partially or fully, must be used to disseminate commercially distributed property content, content control information, payment administrative content, and/or associated usage reporting information;
- empowering commerce participants, subject to the rules and controls previously set in a value chain, to freely fashion control models implementing their Virtual Presence by using GUI templates or rights programming languages employing commerce/rights management components;
- component based control methods that allow the present inventions to efficiently operate as a highly configurable content control system;
- content control models that can be iteratively and asynchronously shaped, modified, and otherwise updated to accommodate the needs of VDE participants;

- iterative and/or concurrent multiple participant processes through the submission and use of secure, control information components (e.g., executable code such as load modules and/or methods, and/or associated data);
- 5 • control information for Virtual Presence employed in protected processing environment nodes located at user sites to ensure that digital events are governed in accordance with the collective rights of commerce model participants;
- 10 • digital events that launch or require other digital events;
- digital events that may include, for example, content use consequences such as collection of audit information, secure communication of such information, payment for content use, or satisfaction of any other electronically stated condition;
- 15 • events that occur within either the secure setting of a local node, or more widely within the secure environment of a distributed system of nodes;
- the association of Virtual Presence rules and controls with protected information enclosed within one or more
- 20 electronic content containers to achieve a high order of configurability for Virtual Presence chains of handling and control;

- distribution using VDE that may package both the electronic content and control information into the same VDE container, and/or may involve the delivery to an end-user site of different pieces of the same VDE managed property from plural separate remote locations and/or in plural separate VDE content containers and/or employing plural different delivery means;
- content control information that is partially or fully delivered separately from its associated content to a user VDE installation in one or more VDE administrative objects;
- delivery of portions of said control information from one or more sources;
- making control information available for use by access from a user's VDE installation secure sub-system to one or more remote VDE secure sub-systems and/or VDE compatible, certified secure remote locations;
- use of delivery means that may include electronic data storage means such as optical disks for delivering one portion of said information and broadcasting and/or telecommunicating means for other portions of said information;

- allowing a content provider to deliver different business rules to a large corporate customer, compared with rules delivered to "retail" customers;
- 5 • supporting separation of content and Virtual Presence controls to allow a provider to associate different control sets with the same content – and not requiring the provider to create one set of content controls that apply to all types of customers;
- 10 • allowing content provider modification over time of rules and controls to reflect sales, new pricing, special discounts, etc. – while limiting this right by rules and controls provided by other parties having more senior rights;
- 15 • employing secure object container technology to efficiently implement Virtual Presence chains of handling and control;
- 20 • use of software container technology to significantly facilitate the organized dissemination of digital content, including the specialized form of digital content constituting rights control information;
- employing object software technology and using object technology to form containers for delivery of at least in part encrypted or otherwise secured information;

- using containers that contain electronic content products or other electronic information and some or all of their associated permissions (control) information;
- 5 • distributing container objects along pathways involving content providers and/or content users;
- securely moving containers between nodes of a VDE arrangement, which nodes operate VDE foundation software and execute control methods to enact electronic information usage control and/or administration models;
- 10 • employing delivered containers both for distributing VDE control instructions (information) and/or to encapsulate and electronically distribute content which has been at least partially secured;
- supporting the essential needs of electronic commerce value propositions by uniting fundamental configurability with secure Virtual Presence;
- 15 • virtual presence across virtual networks in accordance with the underlying agreement amongst commerce model participants to allow each participant to enjoy secure, reliable electronic automation of commerce models;
- 20 • allowing each rights holder's Virtual Presence at a remote site to possess the sole authority to administer or delegate the participant's electronic rights;

001020 0908160

- capabilities that contribute to establishing an environment of trusted cooperative governance;
- practical enhancements relating to the establishment of secure event management and the maintenance of secure audit, encryption, budget, and other relevant information;
- control structures for an overall, distributed, secure rights/event administration environment;
- processes for interaction between independently delivered rules and controls, including electronic negotiation;
- creating distributed rights operating systems;
- integrating control processes into host operating environments;
- secure semiconductors to support protected processing environments;
- a secure, programmable, digital event management component architecture in which components are fully assembleable and reusable;
- differing assemblages of components formed to reflect an exhaustive array of commerce model functional capabilities, overall model implementations, and ad hoc event management scenarios;

- support for the full range of digital content types, delivery modes, and reporting and other administrative activities;
- traveling objects;
- 5 • smart agents;
- "atomic" load module operation to support "sparse space," cost-effective, secure processing semiconductors;
- smart card and other traveling client nodes;
- creating rights management software container
- 10 technologies, including extraction, embedding, and other secure container content management processes;
- Chain of Handling and Control generation of secure objects (containers) and associated control information;
- audit reconciliation and usage pattern evaluation
- 15 processes;
- specialized cryptographic implementations;
- use of a specialized electronic rights and commerce language, unique applications for fingerprinting and/or watermarking technologies, secure control structures, the
- 20 formulation of new types of metering technologies, reciprocal event management (employing dispersed user sites) for automating web-like commerce models, and many other designs and capabilities;

001020-6566100

- mechanisms to persistently maintain trusted content usage and reporting control information through both a sufficiently secure chain of handling of content and content control information and through various forms of usage of electronic information;
- rights management technology supporting persistent, distributed controls;
- means enabling continuing Virtual Presence through Chains of Handling and Control;
- persistency of control as a unique and fundamentally important attribute underlying Virtual Presence and Chain of Handling and Control for enabling true commerce behavior in cyberspace including ad hoc relationships and activities, distributed processes, and reliable enforcement of agreements between parties;
- Persistent Virtual Presence controls that continue to be enforced -- to the extent required by the controls themselves -- as protected digital content is, for example, used and reused, copied and further distributed, extracted and embedded, audited and reported;
- persistency responsive to rules and controls associated with electronic events, that causes new secure content containers to be created automatically by systems and methods supplying the procession of secure transport

5

- 20

- general purpose character electronic commerce technologies provided by a combination of important capabilities including component, object oriented, programmable control language; secure specialized container technology; independent delivery of secure control information mechanisms; Chain of Handling and Control persistency of control mechanisms; event driven operating system functions; and the advanced security architecture -- allowing multiple simultaneous models to evolve, and practically and efficiently operate;
- general purpose rights and event management architecture that is intrinsically reusable for many simultaneous models -- providing enormous competitive economic advantages over technologies that are essentially single model by design;
- commerce architecture client nodes that are basic pieces of reusable cyberspace infrastructure;
- generalized configurability resulting, in part, from decomposition of generalized requirements for supporting electronic commerce and data security into a broad range of constituent "atomic" and higher level components (such as load modules, data elements, and methods) that may be variously aggregated together to form control methods for commercial electronic agreements and data security arrangements;

- a secure operating environment employing VDE foundation elements along with securely deliverable VDE components that enable electronic commerce models and relationships to develop;
- 5 • the unfolding of distribution models in which content providers, over time, can expressly agree to, or allow, subsequent content providers and/or users to participate in shaping the controls for, and consequences of, use of electronic content and/or appliances;
- 10 • a very broad range of the functional attributes important for supporting simple to very complex electronic commerce and data security activities;
- electronic information and/or appliance usage control (including distribution), security, usage auditing, reporting, other administration, and payment
- 15 arrangements;
- capabilities that rationalize the support of electronic commerce and electronic transaction management stemming from the reusability of control structures and user interfaces for a wide variety of transaction
- 20 management related activities;
- content usage control, data security, information auditing, and electronic financial activities that can be

supported with tools that are reusable, convenient,
consistent, and familiar;

- 5 • a general purpose Rights Operating System employing a reusable kernel and rights language components that provides the capabilities and integration needed for the advanced commerce operating systems of the future;
- 10 • a general purpose, reusable electronic commerce capabilities that all participants can rely on will become as important as any other capability of operating systems;
- 15 • such a rights operating system providing rights and auditing operating system functions and other operating system functions -- the rights and auditing operating system functions securely handling tasks that relate to virtual distribution environment;
- 20 • secure processing units and/or protected processing environments that provide and/or support many of the security functions of the rights and auditing operating system functions;
- an overall operating system designed from the beginning to include the rights and auditing operating system functions plus the other operating system functions -- or incorporation of the rights and auditing operating system

functions as an add-on to a preexisting operating system providing the other operating system functions;

- operating system integration and the distributed operating systems; and
- 5 • a rational approach - a transaction/distribution control standard - allowing all participants in VDE the same foundation set of hardware control and security, authoring, administration, and management tools, for widely varying types of information, business market
10 model and/or personal objectives;

Any or all of these features may be used in combination with the inventions disclosed herein.

Brief Description of the Drawings

15 These and other features and advantages will be better and completely understood by referring to the following detailed description of presently preferred example embodiments in accordance with the drawings, of which:

20 Figures 1A-4 show "prior art" examples of how it is hard to find things you need or want;

Figures 5-12 are simplified examples of what example systems, methods and techniques in accordance with these inventions can do;

Figures 13, 14 and 14A show an example matching and classification utility system architecture;

Figures 15-15G show examples of how a matching and classification utility system can interact with other commerce utility
5 systems;

Figures 16A-16C show examples of distributed matching and classification utility system organizations;

Figure 17 shows example matching and classification utility system functionality definitions;

10 Figures 18-46(B) show example steps that may be performed by the example matching and classification utility system; and

Figures 47-70 show some example matching and classification utility system applications.

15 **Detailed Description Of Presently Preferred Example Embodiments**

Figures 5-12 and the discussion above provide an introduction to the following detailed description of presently preferred embodiments in accordance with these inventions. The "electronic matchmaker" shown in Figures 5-12 is implemented in these more
20 detailed embodiments by a matching and classification utility system 900.

Example Matching And Classification Utility

Figure 13 shows an example matching and classification utility system 900 as including:

- an object classifier 902;
- 5 • a user (people) classifier 904; and
- a matching engine 906.

Object classifier 902 classifies things. User classifier 904 classes people. Matching engine 906 matches things with other things, things with people, and/or people with other people.

- 10 In more detail, object classifier 902 receives information about objects and uses that information to classify those objects into groups based on the qualities or characteristics of the objects. For example, the object classifier 902 may classify objects of the type described in in "Ginter et al". Such objects may comprise information and/or
- 15 associated rules for using the information. For example, object classifier 902 may receive as inputs:

- rights management information 909 such as rules and/or associated consequences;
- things 908 controlled or affected by such rights management information including, for example content objects or other information subject to such rules;
- 20 • items 910 such as metadata, abstracts or the like that describe the things 908; and/or

- other information of any type.

Object classifier 902 classifies and/or selects things based at least in part on these inputs.

In this example, user classifier 904 is a type of object classifier
5 that is specially adapted to classify people. User classifier 904 can
classify people based, for example, on:

- audit trails 912 indicating how people have used their computers and other electronic appliances;
- 10 • profiles 914 developed by asking users questions about their preferences;
- controls 909' that are associated, at least in part, with the user or things the user uses;
- object descriptors 910' that describe objects used by the user; and/or
- 15 • other information about and/or relating to the user.

User classifier 904 classifies and/or selects people based at least in part on these inputs.

Matching engine 906 receives, as inputs, the classifications and/or selections made by the object classifier 902 and/or the user
20 classifier 904. Matching engine 906 matches things with things, things with people and/or people with people (or any combination of these) based on these selection and/or classification inputs.

Example More Detailed Architecture

Figure 14 shows a more detailed architectural diagram of matching and classification utility 900. In this example, matching and classification utility 900 receives a variety of inputs including, for example, some or all of the following:

- objects 908 and/or information about objects including controls 909 and/or object descriptors 910;
- content 950;
- audit trail information 916;
- user information such as profiles 914;
- class information 952;
- user information 954;
- other rights management information 956;
- matching criteria 958;
- selection criteria 960; and/or
- other information.

Matching and classification utility 900 in this example can provide a variety of different outputs including, for example, some or all of the following:

- matching information 920;
- class hierarchies 962;
- category definitions 922 and class definitions 970;
- classified objects 908C;
- audit records 964 indicating the results of classification, matching, and or selecting processes;

- reports 966 indicating the results of classification, matching, and/or selecting processes;
- targeted objects and/or pointers 968;
- controls 909;
- 5 • other rights management information; and
- other classification, matching and/or selection related information.

**A Preferred Embodiment Matching and
Classification Utility 900 is a VDE-Aware Commerce
10 Utility System**

In the preferred embodiment, matching and classification utility 900 is constructed as a commerce utility system 90 as described in "Shear et al", and may comprise one or more processes securely distributed over one or more secure electronic appliances within a
15 "Virtual Distribution Environment" as described in "Ginter et al". Furthermore, the present inventions can be used in combination with and/or make use of a wide array of distributed electronic administrative and support services that may be referred to as the "Distributed Commerce Utility." Such a Distributed Commerce
20 Utility may be, among other things, an integrated, modular array of administrative and support services for electronic commerce and electronic rights and transaction management. The Distributed Commerce Utility provides, among other advantages, comprehensive, integrated administrative and support services for secure electronic
25 commerce and other forms of electronic interaction. These

004020-6966100

administrative and support services can be used to supply a secure foundation for conducting financial management, rights management, certificate authority, rules clearing, usage clearing, secure directory services, and other transaction related capabilities functioning over a vast electronic network such as the Internet and/or over organization internal Intranets, or even in-home networks of electronic appliances. Such electronic interactions supported by the Distributed Commerce Utility may, for example, entail the broadest range of appliances and distribution media, non-limiting examples of which include networks and other communications channels, consumer appliances, computers, convergent devices such as WebTV, and optical media such as CD-ROM and DVD in all their current and future forms.

These administrative and support services can, for example, be adapted to the specific needs of electronic commerce value chains in any number of vertical markets, including a wide variety of entertainment applications. Electronic commerce participants can, for example, use these administrative and support services to support their interests, and/or they can shape and reuse these services in response to competitive business realities. Non-exhaustive examples of electronic commerce participants include individual creators, film and music studios, distributors, program aggregators, broadcasters, and cable and satellite operators.

The Distributed Commerce Utility can, for example, make optimally efficient use of commerce administration resources, and

can, in at least some embodiments, scale in a practical fashion to optimally accommodate the demands of electronic commerce growth.

The Distributed Commerce Utility may, for example, comprise a number of Commerce Utility Systems. These Commerce Utility

5 Systems can provide a web of infrastructure support available to, and reusable by, the entire electronic community and/or many or all of its participants. Different support functions can, for example, be collected together in hierarchical and/or in networked relationships to suit various business models and/or other objectives. Modular support
10 functions can, for example, be combined in different arrays to form different Commerce Utility Systems for different design implementations and purposes. These Commerce Utility Systems can, for example, be distributed across a large number of electronic appliances with varying degrees of distribution.

15 Such a "Distributed Commerce Utility" provides numerous additional capabilities and benefits that can be used in conjunction with the particular embodiments shown in the drawings of this application, non-exhaustive examples of which include:

• Enables practical and efficient electronic commerce and rights
20 management.

• Provides services that securely administer and support electronic interactions and consequences.

- Provides infrastructure for electronic commerce and other forms of human electronic interaction and relationships.

- Optimally applies the efficiencies of modern distributed computing and networking.

5 · Provides electronic automation and distributed processing.

- Supports electronic commerce and communications infrastructure that is modular, programmable, distributed and optimally computerized.

10 · Provides a comprehensive array of capabilities that can be combined to support services that perform various administrative and support roles.

- Maximizes benefits from electronic automation and distributed processing to produce optimal allocation and use of resources across a system or network.

15 · Is efficient, flexible, cost effective, configurable, reusable, modifiable, and generalizable.

- Can economically reflect users' business and privacy requirements.

20 · Can optimally distribute processes -- allowing commerce models to be flexible, scaled to demand and to match user requirements.

- Can efficiently handle a full range of activities and service volumes.
- Can be fashioned and operated for each business model, as a mixture of distributed and centralized processes.
- 5 · Provides a blend of local, centralized and networked capabilities that can be uniquely shaped and reshaped to meet changing conditions.
- 10 · Supports general purpose resources and is reusable for many different models; in place infrastructure can be reused by different value chains having different requirements.
- Can support any number of commerce and communications models.
- Efficiently applies local, centralized and networked resources to match each value chain's requirements.
- 15 · Sharing of common resources spreads out costs and maximizes efficiency.
- Supports mixed, distributed, peer-to-peer and centralized networked capabilities.
- Can operate locally, remotely and/or centrally.
- 20 · Can operate synchronously, asynchronously, or support both modes of operation.

· Adapts easily and flexibly to the rapidly changing sea of commercial opportunities, relationships and constraints of "Cyberspace."

Any or all of these features may be used in combination with
5 the inventions disclosed herein.

In more detail, as shown in Figure 14A, matching and classification utility 900 may include one or more rights operating system layers 90-1; one or more commerce utility support service layers 90-4; one or more service application connect layers 90-3; and
10 one or more service functions 90-B. One or more protected processing environments 154 may be used to support secure functions 90-D. Matching and classification utility 900 may be controlled, at least in part, by rights management information such as for example:

- VDE-compatible controls 909;
- 15 • rules and/or their consequences; and/or
- other rights management information.

Matching and Classification Utility Can Interact With Other Commerce Utility Systems

Figure 15 shows that matching and classification utility 900
20 can interact and interrelate with other commerce utility systems described in "Shear et al" including for example:

- financial clearinghouses 200,
- usage clearinghouses 300,
- rights and permissions clearinghouses 400,

- certifying authorities 500,
- secure directory services 600,
- transaction authorities 700,
- VDE administrators 800, and/or
- 5 • other commerce utility systems 90.

Figures 15A-15G show example detailed interactions between matching and classification utility 900 and these various other commerce utility systems 90.

Figure 15A shows interactions between matching and
 10 classification utility 900 and a financial clearinghouse 200. For example, matching and classification utility 900 may send the financial clearinghouse 200:

- requests for information,
- class information such as classes and/or class
 15 assignments,
- bills and charges, and/or
- other information.

Financial clearinghouse 200 may send matching and
 classification utility 900:

- 20 • money,
- audit records,
- payment data,
- user data, and/or
- other information.

Figure 15B shows example interactions between matching and classification utility 900 and usage clearinghouse 300. Matching and classification utility 900 may send the usage clearinghouse 300:

- requests for information,
- 5 • class information such as classes and/o class assignments,
- audit information, and/or
- other information.

Matching and classification utility 900 may receive from usage
10 clearinghouse 300:

- requests for class information,
- usage and/or rights management information,
- audit records, and/or
- other information.

15 Figure 15C shows example interaction between matching and classification utility 900 and rights and permissions clearinghouse 400. In this example, rights and permissions clearinghouse 400 sends matching and classification authority 900:

- controls sets and/or object information;
- 20 • requests for class information;
- clearinghouse usage data; and/or
- other information.

In this example, matching and classification utility 900 sends the rights and permissions clearinghouse 400:

- rights management information such as control sets,
- requests for information,
- class related information such as classes and/or class assignments, and/or
- 5 • other information.

Figure 15D shows example interaction between matching and classification utility 900 and certifying authority 500. In this example, certifying authority 500 sends matching and classification utility 900:

- 10 • revocation lists,
- certificates,
- certifying authority usage information,
- requests for classification information, and/or
- other information.

15 In this example, the matching and classification utility 900 sends the certifying authority 500:

- revocation list checks,
- requests for certificates,
- requests for usage information,
- 20 • classification related information such as classes and/or class assignments, and/or
- other information.

Figure 15E shows an example interaction between the matching and classification utility 900 and a secure directory services

600. In this example, the matching and classification utility 900 sends the secure directory services 600:

- directory lookup information,
- class related information such as classes and/or class assignments,
- requests for information, and/or
- other information.

In this example, the secure directory services 600 sends the matching and classification utility 900:

- directory services usage information,
- directory information,
- requests for classification information, and/or
- other information.

Figure 15F shows an example interaction between the matching and classification utility 900 and a transaction authority 700. In this example, the matching and classification utility 900 sends the transaction authority 700:

- class related information such as classes and/or class assignments,
- requests for transaction usage information,
- requests for control sets, and/or
- other information.

In this example, the transaction authority 700 sends the matching and classification utility 900:

- transaction usage information,
- transaction control sets,
- requests for classification information, and/or
- other information.

5 Figure 15G shows an example interaction between the matching and classification utility 900 and a VDE administrator 800. In this example, the matching and classification utility 900 sends the VDE administrator 800:

- 10
- requests for administration,
 - class related information such as classes and/or class assignments,
 - requests for node and/or web information, and/or
 - other information.

15 In this example, the VDE administrator 600 sends the matching and classification utility 900:

- requests for classification information,
- administrative information,
- node and/or user data, and/or
- other information.

20 **Matching and Classification Utility System Can Be In a Hierarchy of Commerce Utility Systems**

Figure 16A shows an example of an administrative and support service hierarchy including matching and classification utility system(s) 900. In this example, a number of centralized overall

matching and classification utility systems 900 and/or other Commerce Utility Systems 90 delegate some or all of their work responsibilities to other Commerce Utility Systems 90. In the particular example shown, Commerce Utility Systems 154 may

5 provide services to one or more members of one or more classes, for example, to members of the class "manufacturing companies in the Pacific rim." Organizations, such as companies, non-profit groups or the like may have their own Commerce Utility Systems 156. Certain electronic commerce or other activities (the entertainment industry,

10 for example) might have their own vertically-specialized Commerce Utility Systems 158. Certain geographical, territorial or jurisdictional groups (e.g., Commerce Utility Systems services provided with a particular nation or state within nation, one example of which might be all purchasers of particular products within the state of Wisconsin)

15 may have their own territorial/jurisdictional specialized Commerce Utility Systems 160. Commerce Utility Systems 154, 156, 158, 160 lower in the hierarchy may, in turn, further delegate authorities or responsibilities to particular consumers, organizations or other entities.

20 In one example arrangement, the Commerce Utility Systems 90 to which authority has been delegated may perform substantially all of the actual support work, but may keep the delegating Commerce Utility Systems 90 informed through reporting or other means. In another arrangement, the delegating Commerce Utility Systems 90

25 have no involvement whatsoever with day to day activities of the

004020-09E00460

Commerce Utility Systems to whom they have delegated work. In still another example arrangement, the more specialized Commerce Utility Systems do some of the work and the more overarching Commerce Utility Systems do other parts of the work. The particular

5 division of work and authority used in a particular scenario may largely depend on factors such as efficiency, trustedness, resource availability, the kinds of transactions being managed, and a variety of other factors. Delegation of clearing authority may be partial (e.g., delegate usage aggregation but not financial or rights management

10 responsibilities), and may be consistent with peer-to-peer processing (e.g., by placing some functions within consumers' electronic appliances while keeping some other functions centralized).

Matching and Classification Utilities Can Provide Services to Classes of Nodes, Users, Content Services and/or Transaction Services

15

Figure 16B shows an example of how Matching and Classification Utilities 900 can provide services to classes of nodes, users, content services and/or transaction services. In this example, matching and classification utility systems 900(1), ... 900(N) provide

20 horizontally specialized matching and/or classification services for different purposes. For example, matching and classification utility 900(1) serves VDE administrative type functions by classifying VDE deployment related information and associated objects. Matching and classification utility 900(2) specializes in higher education

25 classification tasks. Matching and classification utility 900(3)

specializes in business information related tasks, and matching and classification authority 900(N) specializes in trading transactions. Any of these specialties can be combined together, so that a single utility system 900 can perform multiple functions or portions of

5 functions.

Multi-Function Commerce Utility Systems Can be Organized Hierarchically or Peer-to-Peer

Figure 16C shows a still different, more complex Matching and Classification Commerce Utility System 900 environment including

10 elements of both a hierarchical chain of command and a high degree of cooperation in the horizontal direction between different multi-function matching and classification utility systems 900. In this example, there are five different levels of responsibility with a master or overarching matching and classification utility system 900(1) on

15 level 1 having the most authority and with additional matching and classification utility systems on levels 2, 3, 4, and 5 having successively less power, authority, control, scope and/or responsibility. Figure 16C also shows that different matching and classification utility systems 900 on the same level may have different

20 functions, scopes and/or areas of responsibility. For example:

- a Matching and classification utility system 900(2)(1) may be a "type A" Matching and classification utility system,
- Matching and classification utility system 900(2)(2) might be a "type B" Matching and classification utility system, and

- Matching and classification utility system 900(2)(3) might be a "type C" Matching and classification utility system.

On the next level down, Matching and classification utility systems might be type A Matching and classification utility system (such as, 900(3)(1) and 900(3)(2)), they might be type B Matching and classification utility systems (such as, 900(3)(4)), they might be type C Matching and classification utility systems (such as, 900(3)(5), 900(3)(6)), or they might be hybrids -- such as, Matching and classification utility system 900(3)(3) which is a hybrid having type A and type B functions. Figure 16C also shows that additional clearinghouses on levels 4 and 5 might have sub-types as well as types.

A matching and classification utility 900 might break out along content classes (e.g., movies; scientific, technical and medical; and software). Subtype A might include first run movies, oldies, and art films; subtype B might handle journals and textbooks; and type C might be responsible for games, office, educational content. Peer-to-peer communications between clearinghouses could involve differing classes of consumers, differing jurisdictional classes, differing payment methods classes, and/or any other class distinction.

Matching and Classification Utility System Can Be Constructed From Object-Oriented Service Functions

Figure 14A shows Matching and Classification Utility 900 can be constructed from service functions. Figure 17 shows in more

detail how a matching and classification utility system 900 can be constructed based on service functions such as for example:

- automatic class generation,
- automatic matching,
- 5 automatic class assignment,
- class based searching,
- class based directory,
- audit by class,
- market research,
- 10 rights management language processing,
- other service functions.

Example Detailed Steps Carried Out By Matching and Classification Utility System 900

- 15 The next section of the specification describes some example steps performed by the matching and classification utility 900.

Example Steps to Categorize Objects and/or Users and/or Appliances

- Figure 18 shows example steps to categorize objects, and
- 20 Figure 19 shows example steps to categorize users 95 and/or

appliances 100. The overall categorization steps in these examples are -- at this level -- similar to one another. The processes begin by getting input data (Figure 18, block 1840, Figure 19, block 1840').

Next, a classification and/or categorization method is selected

- 5 (Figures 18, block 1842; Figure 19, block 1842'). The process then assembles a data matrix and applies the selected classification method to the data matrix (Figure 18, blocks 1844, 1846; Figure 19, blocks 1844', 1846'). In addition or alternatively, other data reduction methods may be used (Figure 18, block 1848; Figure 19, block
- 10 1848'). Next, the process assigns objects and/or users and/or appliances to the categories developed by the classification method that has been applied (Figure 18, block 1849; Figure 19, block 1849'). Finally, the process stores the results in electronic and/or non-electronic storage in the "write output data" step (Figure 18, block
- 15 1850; Figure 19, block 1850').

The "get input data" step 1840, 1840' may involve obtaining attribute and/or parameter data from various sources including, for example:

- electronic appliance related attribute data;
- 20 • user demographic data;
- user psychographic data;
- available rights management rules and/or consequences (e.g., permissions records);

- exercised rights management rules and/or consequences (e.g., permissions records);
- rights management and/or other audit and/or usage records;
- any third party source of any information, including rights management, usage, audit, statistical, personal, organizational, political, economic, social, religious, business, government, medical, research, academic, literary, military, and/or information and/or data in any format known or unknown concerning any and all other topics that may contribute to the definition of at least one class and/or the assignment of at least one object to a class.

Detailed example steps for harvesting this data are detailed below in connection with Figures 24-46B. This resulting attribute data may be accumulated and aggregated together to form a composite record used as the input to the classification process.

Figure 20 shows an example composite record 1852. This composite classification record may contain attributes derived from any or all of a variety of rights management and/or other data "harvesting" processes. For example, composite record 1852 may include demographic and/or psychographic data obtained by querying the user 95. It may contain usage data obtained by monitoring audit information produced by various usage transactions. It may contain information reflecting user choices concerning rights management

information, the rights management information available to particular users and/or objects, and rights management processes actually performed with respect to particular users and/or particular objects. The information may be analyzed first to provide statistical
5 and/or other summary information, or individual, more granular information may be provided. The composite record 1852 may also contain attributes of particular electronic appliance 100 installations. The particular example composite record 1852 shown in Figure 20 is one non-limiting example composite attribute record containing
10 attributes obtained through a number of different "harvesting" processes. The composite record 1852 may be organized in a way to allow easy and efficient selection of desired attributes in the course of a database lookup, for example, and to allow easy and efficient selection and/or coding as input to any aspect of a classification
15 and/or the assignment of one or more objects to at least one or more classes.

The Figure 21 example cluster analysis process is one example of steps that may be performed as part of the "apply classification method(s)" block 1846, 1846' of Figures 18, 19. (A classification
20 method, or any other method described in these processes, may be utilized as part of a "knowbot", "agent", "traveling agent", and/or "smart agent", a non-limiting example of which is described in "Ginter et al", for example, Figure 73.) In this particular example, the process selects variables and cases (blocks 1860, 1862, Figure 21),
25 and then assembles an appropriate data matrix (block 1864). A

conventional cluster analysis is then applied (block 1866, Figure 21). The clusters may be interpreted to determine what they mean (Figure 21, block 1868), or they may be compared with previous results and if sufficiently similar, they may be assumed to reflect the same classes as the earlier classification procedure thus minimizing the need for additional interpretation of the clustering results. Step 1868 may be performed automatically or manually, or a combination of automatic and manual processing may be used. Finally, individual cases may be assigned to individual clusters to complete the classification process (Figure 21, block 1870).

Figures 22, 23 show two examples of classification outputs produced by the Figure 21 process. In the Figure 22 example, information from several individuals has been used to create two example categories that reflect differing use profiles. More classes may have been defined than those example classes shown here. Users assigned to the same class have many more features, behavior, and/or other attributes in common than each of them does with members assigned to other classes.

In example Figure 22, members of class 1 tend to spend more per content item purchased, travel abroad more frequently, are more interested in national and international news, business and travel information, and generally do not participate in "pay per view" events and/or content consumption. Members of class 1 also tend to add new rights and/or modify existing rights management controls for

content, for instance, to add a markup and redistribute the content in one example, may be less likely to express a religious preference and/or affiliation, and tend to use the Internet as an area for "surfing" and exploration.

- 5 Members of class 2 tend to pay less for content purchased, seldom travel abroad, tend to be interested in sports, religious content and events, and are more often consumers of movies than are members of class 1. Members of class 2 are more likely to "pay per view" than are members of class 1, and are much less likely to add
- 10 new controls to content and/or modify rights acquired. Members of class 2 are more likely to express a religious preference and among those that do, Protestant denominations are more frequently mentioned. Members of class 2 may use the Internet, but tend to do so as part of their work role and responsibilities rather than as
- 15 entertainment, hobbies, and other leisure-time pursuits.

- Some methods of classification produce parameter data rather than assignment of objects to more discrete (or fuzzy or other kinds of) classes. Instead, this parameter data may indicate the extent to which an object possesses one or more traits, attributes, or class
- 20 characteristics. For instance, a person may have been assigned to class 1 (call it "the cosmopolitan class") or class 2 (call it "the parochial class") as shown in Figure 22; however, using other procedures the same example persons may be assigned parameter data

reflecting the extent or degree to which they are "cosmopolitan" or "parochial" or some of each.

In the example process that generates the information shown in Figure 23A, data for several individuals has been arranged in a case (row) by variable (column) matrix and using means known to those skilled in the arts, subjected to principal components analysis with subsequent Varimax axis rotation. Components with eigenvalues >1.0 were retained for subsequent rotation and use. After rotation, each case was assigned a score on each retained (and rotated) component. Each score indicates the extent to which the case has the characteristic represented by the component.

The hypothetical data in Figure 23A shows how strongly each variable (the column of the input matrix) is correlated with the underlying characteristic or component. For example, "region of the US" and "Family income" are highly correlated while "owns a sports utility vehicle" is not.

Using results such as these plus the input data matrix, a score is assigned to each case indicating the extent to which they possess the trait, attribute, characteristic indicated by each factor or component. The hypothetical data in Figure 23B shows how strongly each case -- a person or thing -- is a member of the class, and/or possesses the underlying variable represented by each component. A higher score shows that example case 1 has more of the underlying component 1 than does example case 3, whose score is close to zero. Components

(factors) may be bipolar with a zero point and cases whose scores may be positive, negative or zero. Hypothetical example case 5 has a negative score on this component.

This component score information may be used by the
5 matching and classification utility 900 to define certain other classes, such as "the class consisting of the top 5% of those who are cosmopolitan," that is, the 5% with the highest scores on example component 1. The original scores and/or derivative class assignments may be included on attribute records with attribute and/or class
10 information harvested from other sources and/or through other processes.

DATA HARVESTING

Example Steps For Collecting Appliance Related Data

15 Figure 24 shows example steps performed by the matching and classification utility 900 to collect appliance attribute data. In this example, an electronic appliance 100 may have certain information associated with it. For example, a VDE administrator 800 may initialize appliance 100 with certain information upon appliance
20 installation. In this example, the matching and classification utility 900 can collect this appliance attribute data and use it as part of a matching and/or classification and/or selection process. As shown in Figure 24, the matching and classification utility 900 may initially specify desired appliance attribute fields or other information

characteristics the utility is going to collect (Figure 24, block 1502). The information to be collected depends upon the purpose and use to which the matching and classification utility 900 is to put the information to. The matching and classification utility 900 may use a
5 data dictionary or other mechanism for specifying the desired types of appliance information it is going to collect.

The matching and classification utility 900 next determines whether it already possesses the desired information for this particular appliance 100 (Figure 24, block 1504). For example, the information
10 may have been previously gathered as part of a prior process. If the information is already available, the matching and classification utility 900 sends one or more events to a "create appliance attribute record" method to process the previously gathered data (Figure 24, block 1506). (In all these processes, if the appropriate method is has
15 been sent previously to a VDE installation, only the associated administrative events necessary to activate the method need to be sent in the VDE container.) Alternatively, if the desired data is not already available ("no" exit to decision block 1504, Figure 24), the matching and classification utility 900 performs the other steps shown in Figure
20 24 to collect the appliance attribute data.

These collecting steps shown in Figure 24 may include sending a VDE container 152 with a "create appliance attribute record" method; and one or more associated administrative events to activate the method, to the VDE administrator 800 (Figure 24, block 1508).

The next step (Figure 24, block 1510) may be performed by the VDE administrator 800 processing the administrative event(s) using the "create appliance attribute record" method to determine whether the administrator already has the desired information for the particular electronic appliance 100. If the operation is successful ("yes" exit to decision block 1512, Figure 24), the VDE administrator 800 may send, to the matching and classification utility 900, a VDE container 152 containing one or more administrative events and the appliance attribute record (Figure 24, block 1514). If the operation is not successful ("no" exit to decision block 1512, Figure 24), the "create appliance attribute record" method operating at VDE administrator 800 may, in this example, collect the data directly from the electronic appliance 100 by sending a VDE container to the appliance, the container containing a "create appliance attribute record" method and one or more associated administrative events (Figure 24, block 1516). The appliance 100 may itself process the administrative event(s) using the "create appliance attribute record" method (Figure 24, block 1518) to produce the required appliance attribute record. Appliance 100 may then send a VDE container 152 containing the appropriate administrative event(s) and the appliance attribute record to the matching and classification utility 900 (Figure 24, block 1520).

In another example, blocks 1508-1514 may be bypassed entirely, and the matching and classification utility 900 may (assuming appropriate authorizations are in place) perform block 1516 to send a container 152 with one or more administrative events

and the "create appliance attribute record" method directly to the electronic appliance 100.

Figures 25(A) and 25(B) together show example steps performed by the "create appliance attribute data" method shown in Figure 24, blocks 1506, 1510 and 1518. As disclosed in "Ginter et al", the actual processing steps are performed by one or more load modules associated with the method. This example method (which, as explained above, may be performed by the matching and classification utility 900, the VDE administrator 800, the electronic appliance 100, any other electronic appliance, or a combination of any or all of these) first locates the site configuration record(s) corresponding to the electronic appliance for which appliance attribute data is to be collected (Figure 24A, block 1522). This site configuration record(s) may, for example, be stored in the electronic appliance secure database. The method next locates the permissions record for the site configuration record(s) (Figure 24A, block 1523). The SPE next determines, based upon the permission record(s), whether the method has permission to access and/or use the site configuration record(s) (Figure 25A, block 1524). If the method does not have the appropriate permission ("no" exit to decision block 1524, Figure 25A), the protected processing environment 154 reports the failure and reason for the failure, and the method writes an associated audit record (Figure 25A, block 1525, 1526) and goes on to process a user configuration record(s). On the other hand, if the method does have permission to use the site configuration record(s) ("yes" exit to

decision block 1524, Figure 25A), the method copies the required fields from the site configuration record(s) to create an appliance attribute record, and may then write an appropriate audit record (Figure 25A, block 1527).

5 After completing processing of site configuration records, the method then locates the user configuration record(s) corresponding to the electronic appliance for which appliance attribute data is to be collected (Figure 25B, block 1528). This user configuration record(s) may, for example, be stored in the electronic appliance secure
10 database. The protected processing environment 154 next locates the permissions record for the user configuration record(s) (Figure 25B, block 1529). The protected processing environment 154 determines next, based upon the permission record(s), whether it has permission to access and/or use the user configuration record(s) (Figure 25B,
15 block 1530). If the method does not have the appropriate permission ("no" exit to decision block 1530, Figure 25B), the protected processing environment 154 reports the failure and reason for the failure, and the method writes an associated audit record (Figure 25B, block 1531, 1532) and exits the process. On the other hand, if the
20 method does have permission to use the user configuration record(s) ("yes" exit to decision block 1530, Figure 25B), the method copies the required fields from the user configuration record(s) to create an appliance attribute record, and may then write an appropriate audit record (Figure 25B, block 1533). The method may then, if desired,
25 create a new permissions record corresponding to the appliance

attribute record (Figure 25B, block 1534). If a new permissions record is desired, the method may include appropriate "shared secrets," expiration interval(s), and/or other data in an associated MDE to, for example, provide a basis for controlling access, use, and
 5 modification of the permissions record.

Figures 26A-26C show examples of appliance attribute records created by Figure 25B, block 1532. Figure 26A shows an example appliance attribute record that may include, for example, an appliance identification field 1536(1) and any number of attribute fields
 10 1538(1)...1538(n). Figure 26B shows a more specific appliance attribute record example including an appliance ID field 1536(1), an operating system field 1538(A), a country field 1538(B), a state field 1538(C), a VDE administrator organization field 1538(D), a VDE version field 1538(E), and a VDE maintenance level field 1538(F).
 15 Figure 26C shows that different encodings may be used for any/all of the various attribute fields 1538.

Example Steps for Collecting Demographic Data

Figures 27A, 27B show example steps for collecting demographic data. In this example, the matching and classification
 20 utility 900 initially specifies demographic data fields it is interested in (Figure 27A, block 1540). The matching and classification utility 900 next determines whether the required data is already available to it (e.g., based on previous inquiries responded to by the user 95) (block 1542, Figure 27A). If the required data is already available ("yes"

exit to decision block 1542, Figure 27A), the matching and classification utility 900 may send one or more events to a "create demographic attribute record" method to process the data (block 1544, Figure 27A).

- 5 On the other hand, if the required data is not available to the matching and classification utility ("no" exit to decision block 1542, Figure 27A), the matching and classification utility may send a container 152 to another commerce utility system 90, the container including one or more administrative events associated with a
- 10 "demographic data query" method and a "create demographic attribute record" method (Figure 27A, block 1546). The other commerce utility system 90 may then process the one or more events using the "demographic data query" method, and write an associated audit record (Figure 27A, block 1548). It may determine whether the
- 15 required demographic data is available (Figure 27A, block 1550). If the information is available ("yes" exit to decision block 1550, Figure 27A), the commerce utility system 90 may process one or more events using a "create demographic attribute record" method in order to analyze the available demographic data, and write a corresponding
- 20 UDE audit record (Figure 27A, block 1552). The other commerce utility system 90 may then send appropriate one or more administrative events and the demographic data attribute record within a container 152 to the matching and classification utility 900 (Figure 27A, block 1554)).

If the required demographic data is not available ("no" exit to decision block 1550, Figure 27A), the commerce utility system 90 may send an administrative event to the matching and classification utility system 900 within a container 152 informing the matching and classification utility that the required data is not available (Figure 27B, block 1556). The matching and classification utility 900 may then send a "demographic data query" method and a "create demographic attribute record" method within a container 152 (along with appropriate administrative events to activate such methods) directly to the user 95 about which demographic information is to be collected (Figure 27B, block 1558). The user's electronic appliance 100 may, in response, process the one or more events using the "demographic data query" method, which may write an associated audit record (Figure 27B, block 1560). If the required data is not collected ("no" exit to decision block 1562, Figure 27B, the user's appliance 100 may send a "failure" message associated with the appropriate administrative event to the matching and classification utility 900, and write an associated audit record (Figure 27B, block 1564, 1566). If the required demographic data is successfully collected ("yes" exit to decision block 1562, Figure 27B), the user's electronic appliance may process one or more events using the "create demographic record" method supplied by step 1558, which may write an associated audit record (Figure 27B, block 1568). The electronic appliance may then send appropriate administrative events and the

demographic attribute record to the matching and classification utility within one or more containers 152 (Figure 27B, block 1570).

Figure 28 shows an example questionnaire "pop-up" screen that may be displayed by the user's appliance 100 as a result of processing events using the "demographic data query" method of block 1548, Figure 27A, and/or block 1560, Figure 27B. In this example, information is collected directly from a user 95 by displaying a questionnaire on a display device that is part of the user's appliance 100. The questionnaire may ask for various demographic information such as:

- name
- address
- city
- state
- zip code
- gender
- date of birth
- education level
- marital status
- number of children

- age of first child
- gender of first child
- other information

5 The user is requested to provide the information by filling in the various fields within the questionnaire. The questionnaire may assure the user that all information the user provides will be treated as confidential, by, for example, disclosing the rules that will be associated with access to and use of the information.

10 Steps similar to those shown in Figure 25A, 25B may be performed to create a demographic attribute record based on the results of a demographic data query. Figure 29A-29C show examples of different user demographic attribute information records resulting from this process. Figure 29A shows an example demographic attribute record 1572 including a user ID field 1574 and any number
15 of attribute fields 1576(1), ... 1576(n). Figure 29B shows a more specific example of a demographic attribute record including, for example, a user ID number 1574, a gender attribute field 1576(A), an age field 1576(B), a highest educational level field 1576(C), a citizenship field 1576(D), a country of residence field 1576(E), a
20 district field 1576(F), a city field 1576(G), and a street address field 1576(H). Figure 29C shows a different detailed encoding example for demographic attribute record 1572-1.

Example Steps for Collecting Psychographic Data

Figure 20 shows example steps that may be performed to collect user psychographic data. In this particular example, the matching and classification utility 900 initially specifies desired psychographic data it requires in order to perform a particular classification/matching process (Figure 30, block 1580). The matching and classification utility 900 determines if the required data is already available to it (Figure 30, block 1582). If the required data is already available ("yes" exit to decision block 1582, Figure 30), the matching and classification utility 900 sends one or more events to a "create psychographic attribute record" method in order to analyze the available data and provide appropriate psychographic attributes (Figure 30, block 1584). If, on the other hand, the required data is not available to the matching and classification utility 900 ("no" exit to decision block 1582, Figure 30), appropriate steps are performed to collect the required data. In this example, the matching and classification utility 900 may send a "psychographic data query" method and a "create psychographic attribute record" method within one or more containers 152 (along with appropriate administrative events to activate such methods), to appropriate repositories that may contain the required data (Figure 30, block 1586). If the required data is available from the repositories ("yes" exit to decision block 1588, Figure 30), then an electronic appliance at the repository (in this example) processes one or more events using the "create psychographic attribute record" method supplied by block 1586 in

order to generate an appropriate attribute record(s) containing the attribute information the matching and classification utility 900 is interested in (Figure 30, block 1590). This information, and associated one or more events, may be sent to the matching and
 5 classification utility 900 within one or more containers 152 (Figure 30, block 1592).

If the required data is not available from the repository ("no" exit to decision block 1588, Figure 30), then the repository may send a "failure" message associated with one or more administrative events
 10 to the matching and classification utility 900 within a container 152 (Figure 30, block 1594). The matching and classification utility 900 may, in response, send one or more administrative events, a "collect psychographic data" and "create psychographic attribute record" method directly to the user's electronic appliance 100 within one or
 15 more containers 152 (Figure 30, block 1596). The user's electronic appliance 100 may, in turn, process the events using the "collect psychographic data" and "create psychographic attribute record" methods (Figure 30, block 1598, 1600), and send the resulting attribute data record(s) to the matching and classification utility
 20 (Figure 30, block 1592).

Figure 31 shows an example psychographic questionnaire "pop-up" screen that may be displayed to the user 95 upon performance of Figure 30, block 1598. This questionnaire may

collect various psychographic information from the user, including for example:

- mood information
- emotion information
- 5 • habit information
- behavioral information
- cognitive information
- medical information
- physical information
- 10 • patient information
- counseling information
- aptitude information
- testing information
- other information
- 15 • combinations of types of information.

The questionnaire may inform the user that all information collected will be treated as "confidential," and may also, if desired, indicate that the user will be compensated for providing the information.

Figures 32A-32C show some example user psychographic attribute information records 1602 that may be created by Figure 30, block 1584, 1590 and/or 1600. Figure 32A shows that a psychographic attribute record 1602 may include a user ID field 1604 and any number of attribute fields 1606(1), ... 1606(n). Figure 32B shows a more detailed user psychographic attribute record 1602 example including a user ID field 1604, a field 1606a indicating whether the user is introverted or extroverted, a field 1606b indicating whether the user is a sensing or intuitive person, a field 1606c indicating whether the user is primarily a thinking person or a feeling person, a field 1606(d) indicating whether the user is primarily a judging person or a perceiving person, and a field 1606(e) indicating an overall psychographic / behavioral profile such as, for example, the iVALS standard provided by SRI. Figure 32C shows a different kind of encoding (in this case, binary) for the various attributes 1606.

Example Method for Determining Attributes Based on Available Rules and Consequences

Figure 33 shows an example method for determining attributes based on available rules and consequences. The matching and classification utility 900 may first send one or more administrative events and a "send permission records" method request to an electronic appliance 100 within one or more containers 152 (Figure 33, block 1610). In response, the appliance may process the events using the method, which may write an associated audit record (Figure 33, block 1612). If this step is performed successfully ("yes"

exit to Figure 33, decision block 1614), the appliance sends appropriate administrative events and the requested permission records to the matching and classification utility 900 within one or more containers 152, and the method writes an associated audit record

5 indicating it has performed this transaction (Figure 33, block 1616). The matching and classification utility may process events using a corresponding "create attribute record from permission records" method to obtain attributes from these provided permission records (Figure 33, block 1618). If the step of block 1612 failed (as indicated

10 by the "no" exit to decision block 1614, Figure 33), the method may send a "failure" message to the matching and classification utility 900, and write an associated audit record (Figure 33, block 1620).

Figure 34 shows a variation on the Figure 33 example in which the appliance 100 rather than the matching and classification utility

15 900 creates the rules attribute record based on a "create rules attribute record from permissions records" method supplied by the matching and classification utility, and then sends the rules attribute record to the matching and classification utility (see Figure 34, blocks 1622, 1624).

20 **Example Method to Construct Attribute Records from Permissions Records**

Figures 35A, 35B show example steps for constructing attribute records from permissions records. The steps shown in Figure 35A, 35B may, for example, be performed as part of the

25 method shown in block 1618 of Figure 33.

In this example method 1618, the matching and classification utility 900 may first check relevant permissions to ensure that it has the authority to perform the desired transactions (Figure 35A, block 1630). For example, the matching and classification utility 900 may

5 examine a permissions record about the permissions records it has collected, this permissions record it is examining indicating what entities have authority to perform operations with respect to the permissions record to be analyzed. Presuming the matching and classification utility 900 has the appropriate permission, it opens a

10 permissions to be analyzed (Figure 35A, block 1632), and performs a sequence of steps 1634-1650 to extract relevant information from the permissions record. For example, information from the permissions record header can be copied into the attribute record (Figure 35A, block 1634), and then the method may locate the rights record header

15 (block 1636, Figure 35A). Information from the rights record header may be copied into the attribute record (block 1638, Figure 35A), along with the identifier for the corresponding right(s) (blocks 1640, 1642, Figure 35A). The process may then recursively locate and harvest data from each method header contained within the rights

20 record (blocks 1644, 1646, 1648, Figure 35B). The process may recursively repeat steps 1638-1648 for each rights record within the permissions record (as tested for by decision block 1650, Figure 35B). Finally, the entire process of steps 1632-1652 may be performed recursively for multiple permissions records to harvest the

25 appropriate rules and consequences information from each of a

number of permissions records (see decision block 1652, Figure 35B).

Figure 36 shows example steps to perform the "check permissions" operation shown in Figure 35A, block 1630. In this

5 example, the process locates the permissions record from which information is desired to be harvested (Figure 36, block 1660), and then determines whether there is a permissions record for that permissions record (Figure 36, decision block 1662). If there is no permissions record that controls that permissions record (and

10 assuming that authorization or additional permission is required to access the permissions record from which information is to be harvested) (Figure 36, "no" exit to decision block 1662), the process reports failure, writes an audit record, and ends (Figure 36, blocks 1664, 1666, 1668). On the other hand, if there is a permissions record

15 that controls access to the permissions record from which information is to be harvested ("yes" exit to decision block 1662, Figure 36), the process determines whether that permissions record for the permissions record enables usage by the matching and classification utility 900 (Figure 36, decision block 1670). If the matching and

20 classification utility 900 does not have permission ("no" exit to decision block 1670, Figure 36), the process reports failure, writes an audit record to that effect, and ends (blocks 1672, 1674, 1676, Figure 36)). On the other hand, if the matching and classification utility 900 is granted permission ("yes" exit to decision block 1670, Figure 36),

25 the process accesses and uses the permissions record for the

permissions record from which information is to be harvested (Figure 36, block 1678).

Figures 37A-37C show examples of attribute records containing information harvested from permissions records. Attribute record 1680-1 shown in Figure 37A includes a user identification field 1682, an object identification field 1684, and any number of attribute fields 1686(1), ..., 1686(n). The attribute record 1680-2 shown in Figure 37B includes, as a more detailed example, a user ID number field 1682, an object ID field 1684, a right ID field 1686a, a method identifier field 1686b, another right ID field 1686c, and corresponding method type fields 1686(d), a further right ID field 1686e and two corresponding method attribute fields 1686f, 1686g, a further right ID field 1686h and corresponding method attribute fields 1686i, 1686j.

Figure 37C shows a different example in coding for the Figure 37B example attribute record.

Example Steps for Assembling Rules and Consequences

Figure 38 shows example steps for assembling rules and consequences. In this example, the matching and classification utility 900 may send one or more administrative events and a "get user rights table" method within a container 152 to an electronic appliance (Figure 38, block 1690). The electronic appliance 100 processes the one or more events using the "get URT" method, which may writes an

associated audit record (Figure 38, block 1692). The method then determines whether the associated URT records are available (Figure 38, decision block 1694). If the records are not available ("no" exit to decision block 1694, Figure 38), the method sends a failure notice to the matching and classification utility 900, and writes an associated audit record (block 1696, Figure 38). If, on the other hand, the URT records are available ("yes" exit to decision block 1694, Figure 38), the method packages the URT records and associated one or more administrative events into a container 152, and sends the container to the matching and classification utility 900 (Figure 38, block 1698). The matching and classification utility 900 may then process the administrative events using a "create attribute record from URT" method in order to extract or harvest the information from the URT(s) (Figure 38, block 1700).

Figure 39 shows another example sequence of steps for assembling rules and consequences. In this example, the matching and classification utility 900 sends one or more administrative events and a "create attribute record from URT" method to the electronic appliance 100 that stores or has access to the user rights table information (Figure 39, block 1702). The appliance then processes the events using the method sent to it, and the method writes associated audit information as it processes (Figure 39, block 1704). If the URT records are available and the step completes successfully ("yes" exit to decision block 1706, Figure 39), the method sends the resulting URT attribute record(s) and one or more administrative

events to the matching and classification utility within a container 152, and writes corresponding audit information to an audit trail (Figure 39, block 1710). On the other hand, if an error condition arises either because the URT records are not available or because the method for some other reason cannot complete successfully, the method sends a failure notice within a container 152, and writes an associated audit record ("no" exit to decision block 1706, Figure 39, block 1708).

Figures 40A, 40B show example steps performed by blocks 1700, 1704 to "create attribute record from user rights table." The method begins by checking associated permissions for the user rights table records (Figure 40A, block 1720). Assuming that appropriate user and/or group permission is available, the method next locates the user rights table (Figure 40A, block 1722), and then begins recursively analyzing the user rights table information to harvest desired attribute information from it (Figure 40A, blocks 1724 and following). In this particular example, the method locates the user rights table record (block 1724, Figure 40A, and then locates the first rights record header within the first user choice record within the URT record (blocks 1726, 1728, Figure 40A). The method copies rights record header information to the attribute record (block 1730), and then locates the right identifier and copies that to the attribute record (blocks 1732, 1734). The method then recursively locates each method header within the user rights table right record, and copies corresponding attribute information to the attribute record

(blocks 1736, 1738, 1740, Figure 40B). Steps 1728-1740 are performed recursively for each rights record within the user choice record (see Figure 40B), decision block 1742), and the above steps are performed recursively for each user choice record within the user rights table (see decision block 1744, Figure 40B). Additionally, steps 1724-1744 are performed recursively for each user rights table record within the user rights table (see Figure 40B, decision block 1746). As a last example step, the method creates a permissions record that controls access and use of the attribute record it has created (Figure 40B, block 1748).

Figure 41 shows example steps performed by the check permissions block 1720 shown in Figure 40A. For example, the sequence of steps may begin by locating a corresponding permissions record (Figure 41, block 1750) and then determining whether there is a permission record corresponding to the corresponding user rights table entry (Figure 41, decision block 1752). If there is no such entry ("no" exit to decision block 1752), the method may report failure, write an audit record, and end (blocks 1754, 1756, 1758, Figure 41). If there is a corresponding permissions record ("yes" exit to decision block 1752, Figure 41), then the permissions record may be examined whether it enables usage for the matching and classification utility 900 (decision block 1760, Figure 41). If the permissions record does not enable usage by the matching and classification utility 900 ("no" exit to decision block 1760, Figure 41), the method may report a failure, write an audit record, and end (blocks 1762, 1764, 1766,

5

10

20

Example Steps for Assembling Usage Audit Records

Figure 43 shows example steps for assembling usage audit records for purposes of matching and/or classification. In this example, the matching and classification utility 900 may send one or

more administrative events and a "get audit records" method to a VDE appliance 100 within a container 152 (Figure 43, block 1780). The appliance 100 may process the one or more events using the "get audit records" method, which may write an associated audit record (block 1782, Figure 43). If the audit records are not available ("no" exit to decision block 1784, Figure 43), the method may send a failure notice within a container to the matching and classification utility 900, and may then write an associated audit record (Figure 43, block 1786). On the other hand, if the audit records are available ("yes" exit to decision block 1784), the method may send one or more administrative events and the audit records within a container 152 to the matching and classification utility 900, and write an associated audit record (block 1788, Figure 43). The matching and classification utility 900 may then process the one or more administrative events using a "create attribute record from audit record" method in order to extract or harvest the information from the audit record it will use to perform matching and/or classification (block 1790, Figure 43).

Figure 44 shows another sequence of example steps that may be used to assemble usage audit records for purposes of matching and/or classification. In the Figure 44 example, the matching and classification utility 900 sends one or more administrative events and a "create attribute record from audit record" method to an electronic appliance 100 within one or more containers 152 (Figure 44, block 1792). The appliance 100 may then process the one or more administrative events using the "create attribute record from audit

record" method, which may write an associated audit record (block 1794, Figure 44). The method may determine, in this process, whether audit records are available (Figure 44, decision block 1796). If no audit records are available ("no" exit to decision block 1796),

5 the method may send a failure notice to the matching and classification utility 900 (Figure 44, block 1798). On the other hand, if audit records are available, the method may create the corresponding usage attribute records and associated administrative event(s), package them into a container 152, send the container to the

10 matching and classification utility 900, and write corresponding audit records (Figure 44, block 1799).

Figures 45A, 45B show example steps for performing the method (shown in Figure 44, block 1794, for example) of creating attribute record(s) from audit records. In this example, the method

15 first locates the audit records in a secure database or other storage facility (Figure 45(A), block 1800). The method next selects an appropriate UDE audit record to analyze (Figure 45(A), block 1802), and determines whether a permission record is available that applies to this particular audit record (Figure 45(A), decision block 1804). If

20 a permissions record is required and is not available, the process reports failure, writes an associated audit record, and ends (Figure 45 blocks 1806, 1808, 1810). If, on the other hand, a required permissions record is available ("yes" exit to decision block 1804, Figure 45), the process determines whether the permissions record

25 grants the device or process permission to use the audit record(s) for

this particular purpose (decision block 1812, Figure 45). If such permission is not available ("no" exit to decision block 1812, Figure 45A), the process reports failure, writes an associated audit record, and terminates (Figure 45A, blocks 1814, 1816, 1818).

- 5 If any applicable permissions record is available and grants permission to the matching and classification utility 900 ("yes" exit to decision block 1812), the process determines multiple audit records need to be analyzed together as an overall event (Figure 45A, decision block 1820). For example, an "atomic transaction" in which
- 10 multiple steps are performed to achieve an overall result may have multiple audit records (e.g., from multiple appliances 100) that may need to be analyzed together in order to make sense out of the overall transaction. As another example, an object may have subparts (e.g., sub-objects) on which operations can be performed – but it may be
- 15 important for matching and/or classification purposes to analyze the results of such multiple operations together in order to determine appropriate attribute(s) for matching and/or classification. If it is necessary to aggregate multiple audit records together for analysis (decision blocks 1820, 1822, Figure 45A), then the process proceeds
- 20 to analyze those audit records together and create corresponding summary transaction information (Figure 45A, block 1824).

The process next determines whether it needs to produce aggregated audit statistics in order to perform the associated matching and/or classification operation (Figures 45A, 45B, decision block

1826). For example, multiple operations may be performed on a certain object. It may be important to know statistics about such operations (e.g., the number of times the object was opened on a certain day, the number of users who opened the object in a certain time period, etc.). If such aggregated statistics are required ("yes" exit to decision block 1826, Figure 45B), the process proceeds to create such aggregated statistics (block 1828, Figure 45B).

The process next copies selected audit record information to an audit attribute record (Figure 45B, block 1830). The process then determines whether it needs to process more audit records (decision block 1832, Figure 45B). If more audit records are required to be processed ("yes" exit to decision block 1832, Figure 45B), control returns to Figure 45A, block 1802 to select the next audit record. Otherwise ("no" exit to decision block 1832, Figure 45B), the process creates a permissions record associated with the newly created attribute record(s) (Figure 45B, block 1834), and completes.

Figures 46A, 46B show example usage attributes/statistic records that the Figure 45A-B process may create. The Figure 46A attribute record 1830-1 may include, for example, a user ID 1832, an object ID 1834, and any number of attribute fields 1836(1), ... , 1836(n). The more detailed Figure 46B example attribute record 1830-2 includes a user ID number 1832, an object ID 1834, a right ID 1836a and associated method characteristic 1836b, another right ID 1836c and associated method 1836d and associated statistic 1836e, a

DDI-020-6926160

further right ID 1836f and associated method attribute 1836g, another right ID 1836h and associated methods 1836i, 1836j, and associated additional attributes 1836k-1836o. The characteristics shown in fields 1836k-1836o could, for example, be derived from an aggregate of any number of individual audit records recording individual transactions associated with the object identified in field 1834.

EXAMPLES

The following are some non-limiting examples of how Matching and Classification Utility 900 may be useful in certain applications.

Example: Matching and Classification Utility 900 Can Support Narrowcasting or "Push" Distribution Models Based On Classes

Interactions with content, transactions, and other events on the World Wide Web are mainly driven today by following chains of hypertext links, using various search engines, and/or indexes, to say nothing of just plain luck and persistence, to find interesting and/or useful content and/or services. Time consuming and generally inefficient, these search activities share in common the feature that each consumer must intentionally "pull" desired content from a Web site to their computer after successfully identifying specific content or services of interest at that time. The present inventions also support "pull" models—a topic to be addressed shortly. However, the present

inventions also support narrowcasting or "push" models of content distribution as well.

In one example, the matching and classification utility 900 can facilitate much more automated and therefore more efficient and effective content creation, access and/or distribution services that "push" information and/or services to users. Example Figure 47 shows an example "information push" model 2000 in which an arbitrary number of users 2001(1)-2001(n) each have a VDE node (e.g., a protected processing environment 154) installed on their appliances. These example appliances may be of any kind, including computers, so-called Web television or Web-TV, DVD appliances with some form of backchannel, a settop box with a "back channel", and so on.

Perhaps with the permission of the user or other authority, such as an administrator within an organization, the VDE node collects various usage information or "info exhaust" according to the rules and usage consequences provided by one or more value chain participants. At times specified by default and/or by the associated rules and consequences, audit records are sent, in this example, in VDE containers 2006(1)-2006(n) to a usage clearinghouse 300, which in turn, may send all or a portion of these audit records in a VDE container 2008 to the matching and classification utility 900. The audit records may contain rights management information, including, but not limited to the amount of usage, the amount paid, if any, the

5 Figures 35A, 35B and associated discussions) and/or objects that have been used (objects with URT entries - see Figures 40A-40B and associated discussions) on the node.

10 for example, information in text format and/or metadata 2005
associated with content objects. Using at least one classification
method, the matching and classification utility 900 may create at least
one object class hierarchy, object class, object classification scheme,
object category and/or object category scheme using at least some
15 rights management information and assign at least one object to at
least one category and/or class.

20 least one category and may assign at least one node and/or user to a category and/or class. In Figure 47, the matching and classification utility 900 sends a VDE container 2002 to content provider 2010 with information showing the classes of content used by one or more nodes and/or users along with a request that the provider 2010 send

similar content back to one or more users 2001. At least one content provider 2010 then sends at least one VDE container 2004 to user A with content and/or information about available content that may be of interest to user A given the history of content usage as reflected in VDE audit records and/or other rights management information. In this "push" example, classes of content or information about available content may be pushed automatically from (a class of) content providers to one or more members of class of users and/or nodes. Consequently, users do not have to search as intensely, if at all, for content of interest to them.

In this example, user A receives content that may be most like content the user has already used, perhaps like content used most frequently in the recent past. The present inventions also support the matching and classification utility 900 and/or content provider sending content that is in a class or classes more distant from topics of prior and current interest to a particular user and/or group of users. Certain classification methods familiar to those skilled in the arts may provide quantitative indicators of distance that, in turn, may be used as at least one criterion for selection.

In another example, matching content to users and/or nodes may be based in part on class assignments that are in turn based in part on information concerning user preferences solicited by the matching and classification utility 900 or other value chain participant, such as a market research firm, advertising agency,

provider, distributor, VDE administrator 800, or other Commerce Utility System.

Although the matching and classification utility 900 and/or content provider may send "more of the same," in another example
5 the present inventions support providers at least occasionally sending content more distantly related to the user's apparent interests to determine if the user's circle of interest might be a little larger than that indicated by past usage and other, related rights management information alone.

10 In another example, providers may from time to time send content unrelated to the user's apparent interests that may nevertheless reflect the interests of persons and/or groups sharing at least one attribute with the user. For instance, the matching and classification utility 900 may, by sending a VDE container with
15 appropriate user and content class information, suggest to a provider that user A receive content similar to content used by another member or members in the same group or class as user A. In one example, the matching and classification utility 900 may suggest sending business information related to a particular vertical market segment because
20 others in the same class as user A have paid attention to that market.

In support of various content narrowcasting or "push" models, the matching and classification utility 900 may provide content class related information to a "subject switch" or "subject mapper," which in turn, matches participants desiring information in one or more

specified classes with one or more sources of content in the requested class or classes.

The non-limiting subject switching example 2050, Figure 47A, shows a number of customers 2053(1)-2053(n) each with an
 5 appliance 2052(1) -2052(n) such as a personal computer. Other arrangements may include appliances such as a WebTV interface and/or an intelligent "settop box" connected to an interface device that uses one or more (digital) TVs for display. Still other arrangements may include an NC computer without a local hard disk
 10 logically connected to at least one server, a personal digital assistant with a network connection, and/or any other appliances with suitable processing, storage, and communications capabilities.

Referring again to Figure 47A, each customer appliance 2052 may have a VDE secure node installation 2054 incorporating a
 15 protected processing environment 154, as described in "Ginter et al", and messaging services software 2058 that manages communications with other appliances. (In an alternative example, some appliances may lack secure nodes or sufficiently secure nodes, and receive appropriate one or more protected processing environment 154 based
 20 services from one or more servers and/or peers.) These appliances may be located in the same physical and/or logical environment, such as on the same local area network, and/or may be distributed across wide area networks such as multi-location corporate Intranets and/or the Internet itself. Among other tasks, messaging services 2058

- "listens" for messages destined for that particular appliance or for broadcast messages intended for at least one appliance in the set of appliances that receive the broadcast. In certain instances no appliance may actually be "listening." In other examples, the
- 5 messaging services 2058 may incorporate delivery assurance capabilities that assure delivery through use of explicit or implicit acknowledgments of receipt combined with the ability to retransmit information that has not been acknowledged. Messaging services 2058 may be designed such that an operator may select from one or
- 10 more delivery assurance levels, for example "no receipt acknowledgment," "retry n times, then notify operator if not received," "retry until a certain date/time, then notify operator if not received," "retry n times and/or until a certain date/time, no operator notification necessary," et cetera.
- 15 Messaging services 2058 may use the secure node 2054 to package one or more messages in a VDE secure container that may also include one or more sets of rules and usage consequences that may be associated with one or more messages in the container as described in "Ginter et al". In this example, messaging services 2058
- 20 then sends the secure container to one or more destinations using, for instance, TCP/IP and/or some other network protocol(s). Also, messaging services 2058 may broadcast a VDE container to one or more other customers 2053.

In this example, a customer 2053 uses application 2060 to persistently request or "subscribe" to one or more particular classes of content. For example, a highly detailed class might include "business information concerning the US market share of PC vendors, information in text format, costing less than a dollar per item, and for which the subscriber receives the right to excerpt at least one whole paragraph, provided that the excerpted amount constitutes less than 25% of the entire item based on word count." This same and/or another application may also be used to interact with instances of content in the desired class, for example, by displaying information on a computer screen and/or another output device in accordance with the rules and usage consequences associated with that item. If a user no longer has an interest in one or more classes, they may also use the same (or similar) application 2060 to "unsubscribe" from a particular subject, or specify further narrowing or broadening criteria to adjust the flow of content from one or more classes.

Items in the desired class or classes may be available from more than one content source 2074(1)-2074(n). To enhance the efficiency of locating content of interest to the subscriber or other participant, the matching and classification 900 may have created such a class definition and assigned one or more content items to that class. In one example, the matching and classification 900 may have sent one or more methods, and administrative events necessary to invoke the method(s), in a VDE secure container to one or more content sources 2074 where the classification methods are executed.

Such methods may, for example, assign content items to one or more classes. One or more object and/or item identifiers may have been transmitted to the matching and classification utility 900 along with class assignments for each item. If the matching and classification utility 900 has not previously created the desired class and assigned items to it, in response to a request from the subject switch 2051, the matching and classification utility 900 may do so using any appropriate combination of one or more such classification methods and procedures. The matching and classification utility 900 may create at least one object class hierarchy, object class, object classification scheme, object category and/or object category scheme using at least some rights management information and assign at least one object, item, and/or subscriber to at least one category and/or class.

Subsequent to receipt of the request and/or "subscribe" message from the customer 2053, the subject switch 2051 may query the matching and classification 900 for content sources 2074 that have items in the desired class or classes. The matching and classification utility 900 may respond with information indicating known sources of information in the desired class(es), if any. The subject switch 2051 may then send a VDE container to the appropriate content source(s) 2074 indicating that certain customers 2053 are interested in items in the desired class and that the content source 2074 should send items in this class to this customer 2053

and/or groups of customers, and/or include such content in broadcasts which may be received by such subscribers.

The content sources 2074 may have already received class definitions and class assignment information from the matching and classification utility 900 and/or may have received from the matching and classification utility 900 or another party to the transaction one or more classification methods and associated events to invoke one or more of these methods to perform classification and/or class assignment processes.

10 In one arrangement, the content source 2074 may send the desired items directly to the subscribing customers 2053 by using the messaging services 2058 and subject switch 2051 to publish each item as it becomes available for distribution. In another example, the content source 2074 may broadcast the information such that

15 subscribers' messaging services 2058 will have the opportunity to access the such items from a broadcast. The content source 2074 may call on messaging services 2058 to use the VDE secure node to package the item in a VDE container along with associated rules and usage consequences and then send that container such that one or

20 more listening messaging services 2058 on other appliances 2052(1)-2052(n) will receive it. Based on subject information contained in the message header and/or in unencrypted (but optionally protected for integrity) areas of the VDE container, the listening messaging services 2058 may identify the message as belonging to a subject

class it is listening for, then use the VDE node to open the container and view or otherwise use the item in accordance with that item's associated rules and usage consequences.

In another arrangement, the subject switch 2051 may be located
5 on each customer appliance 2052(1)-2052(n). Using messaging services 2058, each subject switch 2051 may communicate with the matching and classification utility 900 to locate sources of content matching the subscribed classes. In this example, the subject switch 2051 on the local appliance then uses the messaging services 2058 to
10 communicate with one or more content sources 2074 indicating classes of content to which it wishes to subscribe. Using the messaging services 2058, one or more content sources 2074 may directly send and/or broadcast items in the desired classes to subscribing customers 2053 in VDE secure containers along with
15 associated rules and consequences. In another arrangement, the content source 2074 may send one set of rules and usage consequences that apply to members of one or more item classes, thus potentially improving the efficiency of distribution and of rights management. In another example, the rules and content items may be
20 sent in separate VDE containers. In this example, the messaging services 2058 and subject switch 2051 listen for messages that are addressed to those customers who subscribe to a particular content item class and makes those items available to customers using an application 2060.

In another arrangement, messaging services 2058 and/or subject switch 2051 may be installed and run on network routers, network switches, one non-limiting example being ATM switches, and other packet and/or cell switches.

5 **Example: Digital Broadcasting Based On Matching And Classification**

“Shear et al” discloses a Digital Broadcasting Network ("DBN") that may function as a cooperative of Web sites and, for example, service providers, with a central and perhaps regional and
 10 logical (e.g., market based) headquarters groups, or it may function as a for profit, shareholder corporation in a business model reminiscent of television broadcast companies (e.g., NBC), or it may function as a cooperative or virtual corporation that has some mix or combination of mixes of the above attributes and employ distributed peer to peer,
 15 hierarchical, and centralized administrative business relationships and activities.

In one example, plural corporations may join together to provide the advantages of size and coordination with individual participants providing some degree of specialty expertise and the
 20 body of entities coordinating together in some fashion in a "higher" level cooperative or corporation.

Figure 48 shows one non-limiting example 2100 of a DBN that includes one or more DBN Web servers 2104(1)-2104(n) and one or more Web users each with VDE nodes. Users are attracted to a

specific DBN server (or servers) because it provides access to specialized content and/or services 2108. Based at least in part on rights management information 2110 collected from DBN servers, for example, controls associated with the most frequently requested

5 information, the matching and classification utility 900 creates categories of content (and/or services) and assigns DBN servers to one or more classes according to their specialization(s). The matching and classification utility 900 may may create at least one class hierarchy, class, classification scheme, category and/or category

10 scheme using at least some rights management information and assign at least DBN server and/or at least some information to at least one category and/or class.

For example, one DBN server may specialize in consumer sports information while another may specialize in legal information.

15 DBN servers may specialize in plural content (and/or service) areas. This class and class assignment information is provided to DBN servers, to content (and/or service) providers, or both.

The matching and classification utility 900 in one example sends VDE containers 2112 to content sources 2102 indicating

20 specific classes of content that should be sent to one or more DBN servers 2104. Using this information, content providers 2102(1)-2102(n) then send content in these categories in VDE containers 2106 that match the categories of most frequently hit and/or consumed content on a DBN server 2104(1)-2104(n). (In another example,

other information may be used as the basis of classification, matching, and selection.) For instance, the matching and classification utility 900 sends a VDE container 2112(2) to content source 2102(1) with instructions to send content in categories 1,11, and 15 to DBN server 1 (2104(1)). This content may, in turn, be sent to one or more consumers in VDE containers 2108(1), 2108(3).

In one aspect, this example process is analogous to hard goods manufacturers and distributors keeping Wal-Mart shelves stocked with those items in greatest demand based on point of sales and inventory data. One difference, of course, is that in this example, the DBN server is stocked with intangibles in the same or similar class as the intangibles sold rather than providing replacements for hard goods that have been sold off the shelf. In another example, a DBN server may send its classification data to content providers along with a request that they send more of the same. The request may be sent independently of the class information.

In another example, the matching and classification utility 900 may receive content and/or rights management information from providers and go on to create classes of content and/or content providers in which the classes may be partly defined using rights management data. Content on one class may, among other things, be distinguished from content in another class by price, payment methods, usage opportunities (e.g., available for printing, available for viewing pay-per-use), usage consequences, and/or specific

permissions. The matching and classification utility 900 may subsequently send a communication, perhaps in a VDE container, to providers indicating that they send content in one or more specified classes to at least one DBN server.

- 5 Non-limiting example Figure 48 shows that the DBN 2100 may consist of video 2202 and/or audio 2203 content providers who send certain categories of video and/or audio content 2206 to DBN servers 2204(1)-2204(n) based on the categories of content each server may specialize in, which, in turn, may be determined at least in part on
- 10 frequency of usage and/or other rights management information sent in VDE containers 2213 to the matching and classification utility 900, or to a usage clearinghouse 300 and then to a matching and classification utility 900. (In another example, other information may be used as the basis of classification, matching, and selection.) The
- 15 matching and classification utility 900 sends VDE containers 2212 to content sources indicating that they should send content in specific categories 2206 to specific DBN servers 2204. In turn, each DBN server 2204(1)-2204(n) delivers video 2208 and/or audio 2209 in VDE containers to parties interested in such content. In another
- 20 example, a VDE container may hold both video and audio and/or any other content type.

Example: Matching and Classification Utility 900 Can Also Support "Pull" Distribution Models Based On Classes

Notwithstanding the noted trend toward "push" content delivery models, the present inventions also enhance the efficiency, focus, specificity, and convenience of content "pull" models. In one example 2300 (Figure 49), the matching and classification utility 900 sends in VDE containers 2306(1)-2306(n) at least one administrative event and/or associated method that performs classification and/or class assignments to a VDE-aware appliance. The administrative events and method(s) are processed under the control of the VDE node. In one example, the results of processing the classification method may indicate at least one class of content and/or services of interest to a user and/or node. The classification method may also create at least one class hierarchy, class, classification scheme, category and/or category scheme using at least some rights management information and assign at least one service and/or at least some content to at least one category and/or class.

Subsequently, a VDE container 2308 may be sent to a provider 2302 with information indicating at least one class of content, services, transactions, rules and/or usage consequences, such as the ability to modify, excerpt and/or reformat, and/or events and a request that that the provider send content and/or pointers to services that meets the stated criteria and/or descriptive information about such content, services, transactions, and/or events to the requesting user

and/or node. The request may, for example, be initiated explicitly by the user and/or node or may be initiated by the node according to one or more administrative events and associated methods and/or control sets. In turn, the content provider 2302 sends a VDE container 2304
5 to the requesting user 2306(1) with content that matches the desired selection criteria and/or profile.

The user may elect to use, consume, purchase, and/or rent one or more content objects (or use one or more services). As this one example shows, the user pulls in content and/or interacts with
10 services by matching at least one class indicating user preferences with at least one class of content objects and/or services and/or transaction types.

Example: The Enterprise Distributed Matching And Classification Utility

15 Businesses and other organizations may be concerned with privacy and confidentiality regarding information and/or services used within the company. This concern may be manifest regardless of whether the information and/or services originated inside and/or outside the organization. Thus some organizations may have strong
20 incentives to take advantage of the present inventions by operating a distributed matching and classification utility 900 to provide matching and classification services within the enterprise while at the same time maintaining a higher degree of confidentiality and privacy by selecting and/or limiting the nature, range, and detail of
25 information sent outside the organization.

Figure 50 shows an example 2400 of an entity 2406 that has one or more VDE enabled appliances and users 2420(1)-2420(5) on a corporate Intranet 2418. These appliances may be, for example, computers, workstations, mainframes, or more specialized devices, such as supercomputers and/or graphics workstations for animation and special effects. The company may also operate internally one or more Commerce Utility Systems, perhaps including a financial clearinghouse 200, a usage clearinghouse 300, and a matching and classification utility 900. The company may also operate at least one content server 2414. These commerce utility systems and servers are also connected to the company Intranet 2418. The company 2406 also maintains one or more connects to the Internet 2402. (In another example the company may maintain connections to at least one private network operated by themselves and/or another party in addition to, or instead of one or more connections to the public Internet.) The content server(s) may provide access to internal, proprietary company information and/or to external, often commercial information. The internal content server may act as a gateway to external providers 2404(A)-2404(C) and/or may host commercial content locally on a content server 2408.

In one example, VDE audit records and/or other rights management information are sent in VDE containers 2412 from one or more VDE nodes 2420 to the enterprise usage clearinghouse 300 which may forward at least some of this usage information in VDE containers 2410 to the enterprise matching and classification utility

900. The enterprise matching and classification utility 900 may also collect from internal information sources 2414 information in addition to audit and rights management information, such as information in a human resources, accounting, and/or budgeting database containing data about company employees. These data may indicate, in one example, titles and responsibilities within the company, budgets allocated for external information and/or services, authority to spend, and budget remaining. The budget and financial information may have come in part from the financial clearinghouse
200. The matching and classification utility 900 may also create at least one class hierarchy, class, classification scheme, category and/or category scheme using at least some rights management information and assign at least service and/or at least some content to at least one category and/or class.
- In one example, using at least some VDE rights management data, for example, whether certain information can be viewed by anyone, by any employee, or only by employees in certain job classes, such as "manager," the enterprise matching and classification utility 900 creates one or more categories and assigns one or more employees and/or VDE nodes to one or more topic categories. These categories may, for example, indicate content and/or service topics, subjects, and/or content areas of potential interest to each employee and/or groups of employees sharing at least one attribute in common, for example, similar interests and/or responsibilities.

In turn, the enterprise matching and classification utility 900 sends to at least one external content and/or service provider 2404 on Internet 2402 one or more VDE containers 2424 with information that indicates categories of interest. The content providers 2404 may
5 themselves be specialized; in one example, a content provider may specialize in general business and financial news while another may specialize in scientific, medical, and/or technical information. In another example, a single content and/or service provider may provide an extremely broad range of content and/or services.

10 The external provider may send at least one VDE container 2422(1) with content and/or rules and consequences and/or metadata about content and/or services to a content server internal to the enterprise. In another example, such VDE container(s) 2422(2) may be sent directly to an employee and/or one or more groups of
15 employees. The information sent by the external provider is tailored to, or in some way responsive to the content and/or service categories requested by the enterprise matching and classification utility 900.

In another example, the enterprise matching and classification utility 900 itself may be a distributed commerce utility implemented
20 on more than one computer and/or other appliance within the enterprise. These several matching and classification utility 900s may serve different geographic areas and/or may themselves specialize in particular content and/or service areas.

In another example, the enterprise matching and classification utility 900 send class and/or class assignment information to a matching and classification utility 900 in another organization that, in turn, may be part of a common value chain.

5 Example: Chain of Handling and Control Entails Class-based Rules and Usage Consequences

VDE-based value chain management or "chain of handling and control" disclosed in "Ginter et al" enables, amongst other things, plural parties to independently contribute rules and usage consequences under the authority and/or control of more senior or prior participants in the value or distribution chain. Class-based rules may play a role in the efficiency and effectiveness of creating, operating, and/or extending value chain processes.

Figure 51A shows an example 2500 of a publisher ABC 2502 using a VDE packaging application 2510 to put into a VDE secure container 2512 sets of rules and usage consequences that may vary according to class. In this non-limiting example, the class is "content type." The publisher may have rights in a wide variety of content and content types. Consequently, the publisher may create rules for text objects that may differ from rules for audio objects.

The publisher 2502 sends the class-based rules and usage consequences to a first creator 2504 who also has installed VDE on her or his appliance 2516 and who has also been given one or more certificates and/or other digital credentials by the publisher (and/or

5 change some or all of the publisher's rules.

10 contributes rules that implement a one-time 50 cent charge to the
consumer for opening and viewing the creator's image. The creator
may also contribute rules reflecting his wish to receive audit records
with information concerning the consumer and/or context in which
the image was used. These creator rules and usage consequences are
15 contributed generally independently of the rules and usage
consequences contributed by the publisher. Note that the VDE
container 2514 now holds at least the publisher's 2502 rules for each
object class, the first creator's image and his associated rules and
usage consequences.

20 A second creator 2506 receives the VDE container from the first creator and using a VDE packaging application 2516 adds a text file to the container 2520 along with her rules and usage consequences. As before, she also has a certificate and/or other digital credential(s) identifying her as authorized by publisher ABC to

add and/or modify content and rules and usage consequences. As in the case of the first creator 2504, she adds her text and rules and usage consequences generally independently of controls contributed by prior participants. She may, in one example, prevent printing of the text and charge \$1.00 the first time a consumer opens and views the text.

The VDE container 2508 now holds text and rules and usage consequences contributed by creator 2 (2506), an image and rules and usage consequences contributed by creator 1 (2504), and the class based rules (and perhaps other rules as well) contributed by example publisher ABC 2502.

Creator 2 (2506) sends the VDE container 2508 to publisher ABC 2502 who then sends the container 2522 directly and/or indirectly to consumers. When the consumer uses the content, the rules and usage consequences of all three value chain participants (and of other possible participants as well, distributors and repackagers, for example) are applied.

Example 2600, Figure 51B shows that the publisher 2602 may have sent a VDE container 2612 with various rules and usage consequences to a matching and classification authority 900 who may classify the rules and send the rules and their class assignments to a rights and permissions clearinghouse 400. The matching and classification utility 900 may also create at least one class hierarchy, class, classification scheme, category and/or category scheme using at

least some rights management information and assign at least one rule to at least one category and/or class.

An authorized first creator 2604 may send a VDE container 2617 to the rights and permissions clearinghouse 400 asking for rules in the class "rules for authorized creators, for image objects, from publisher ABC." The rights and permissions clearinghouse 400 returns a VDE container 2614 with rules in the requested class. The first creator 2604 uses a packaging application 2616 to package his image using these rules plus rules and usage consequences reflecting his rights and wishes and sends the VDE container 2614 to the second creator 2606.

The second creator 2606 also sends a VDE container 2619 to the rights and permissions clearinghouse 400 asking for rules and consequences in the class "rules for authorized creators, for text objects, from publisher ABC." The rights and permissions clearinghouse 400 returns a VDE container 2621 with rules and consequences in the desired class. The second creator 2606 uses a packaging application 2618 that determines that she is a creator authorized by publisher ABC 2602 and goes ahead and adds her text object and her rules and consequences to the VDE container 2608, which is then sent to the publisher ABC 2602 for further augmentation, vending, and/or distribution to other value chain participants.

Example: Secure Directory Services May Provide Class And Class Assignment Information

Whole industries have arisen to target communications to individuals, organizations, groups, and/or other classes sharing at least one common attribute, and/or to provide directories from which others can locate individuals, organizations, groups, and/or other classes. Examples of these industries include direct marketing, advertising, yellow and white pages directories, directories of directories, and various electronic and paper membership lists and professional directories.

In addition to identifying information such as names, e-mail addresses, physical mailing addresses, phone numbers, fax numbers, and/or similar attributes, the secure directory services 600 may also provide information about class membership(s) for individuals, devices, services, groups, and/or organizations. The non-limiting example 2700 shown in Figure 52 includes a secure directory service 600 that has received class and class assignment information for one or more individuals 2716(1)-2716(n). The class assignment information is shown in the bottom four rows of the directory record 2718(1) for one individual.

In this example, a content provider 2702 sends a VDE container 2704 to a secure directory services 600 asking whether the service can provide a list of individuals in class "AF." The requested class could be any class defined by one or more attributes and may be based on usage profiles that include rights management information,

non-exhaustive examples of which include price, payment methods accepted, permitted operations, meters, and privacy controls.

The secure directory services 600 returns to the content provider in a VDE container 2706 an indication that there are
5 presently 57 individuals known to that service in class "AF." In turn, the content provider 2702 sends a VDE container 2708 with at least one piece of content and/or rules and usage consequences back to the secure directory services 600 along with instructions requesting that the secure directory services 600 forward the content and/or control
10 sets to each of the 57 members of class "AF" who might be interested in this piece of content. The secure directory services 600, in turn, forwards the content and/or controls (in VDE containers 2714(1)-2714(n)) to members of class "AF," who may elect to interact with the content in accordance with their associated rules and
15 consequences.

In another example, the secure directory service 600 may send identifying information 2710 directly to the content provider 2702 who may then send content 2712 in one or more classes directly to one or more members 2716(1)-2716(n) of the class. The secure
20 directory services 600 may, for example, include permissions for the class information that have expiration dates and/or limits on the number of times the information can be used.

**Example: Matching And Classification Utility 900
Supports Class-Based Micro-Merchandising And
Micro-Segmented Sales Processes**

The present inventions may be used in support of services as well as content distribution based business. Example 2800 (Figure 53) shows a travel company 2801 sending a VDE container 2810 to a matching and classification utility 900 requesting information on those individuals who may be interested in certain combinations of leisure-time activities. These classes might have been defined at least in part on the basis of usage and other rights management information 2816, for example, the kind of leisure-time information recently looked at, for how long, and/or its cost, and/or the kind of Web sites recently frequented, sent from consumer VDE nodes 2802(1)-2802(n) to the matching and classification utility 900, and/or to a usage clearinghouse 300 who, in turn, sends at least some of the usage information (or a summary form of such information) to the matching and classification authority 900. Classes may also be defined using information gathered directly from the consumer 2818, perhaps under the control of VDE. The matching and classification utility 900 may also create at least one class hierarchy, class, classification scheme, category and/or category scheme using at least some rights management information and assign at least one consumer, service, and/or at least some information to at least one category and/or class.

Example Figure 53 shows that a consumer 2802(1) has recently indicated a preference and/or interest in skiing, music, and flying to

Colorado. Another consumer 2802(n) has indicated a preference for and/or interest in surfing Hawaii. These preferences may be determined at least in part on the basis of rights management information. In response queries sent in one or more VDE containers

5 2810 from the travel company asking for interest and preference information, the matching and classification utility 900 returns one or more VDE containers 2812 with identifying and class information. The travel company may send information about already existing vacation packages and/or packages specially created to meet the

10 specific interests of one or more individuals, for example, information about skiing in Colorado, and rock concerts 2604 to consumer 2802(1) and information 2614 about surfing Hawaii to consumer 2802(n). The recipients may send VDE containers 2806 to the travel company 2801 indicating agreement to buy the package offered or

15 may request additional information or may negotiate terms and conditions such as price, departure date, insurance, and the like. These negotiations may be conducted using the inventions described in "Ginter et al", Figures 75A-76B using VDE negotiations.

Both services and/or hard goods may be offered to particular

20 persons, nodes, groups, and/or entities based on the class membership of the potential purchaser and the class membership of the goods and/or services to be purchased. Thus in another example, the travel company could have included the purchase and/or rental of the skis or of the surf board.

**Example: Matching And Classification Utility 900
Supports Trading in Hard Goods**

Business to business trading in goods and/or services may be substantially facilitated through services provided by the matching
5 and classification utility 900. Information on certain classes of goods and services may be delivered to certain people, groups, or entities based on the class membership of the recipient. In one example, these various class memberships may be determined using control set and audit information regarding trading preferences and/or
10 transaction patterns. In another example class membership may be determined by actions and/or information provided by at least one value chain participant.

Example 2900 (Figure 54) shows a buyer A 2904 sending a VDE container 2908 to a trading company 2902 with a request asking
15 if trading company will sell company A one or more desired items. Trading company 2902 may then send a VDE container 2910 to a matching and classification utility 900 with a query asking who can supply the desired items under terms and conditions that are also included in the container. Since these terms and conditions may be
20 the subject of negotiations, they may be in a format conducive to VDE-based negotiations as described in "Ginter et al" Figures 75A-76B.

The matching and classification utility 900 may send inquiries 2910 to one or more suppliers 2906(A)-2906(N) and/or may have
25 already received information and/or associated control sets from

suppliers in VDE containers 2912. Based on the request from trading company 2902 and supplier 2906 information obtained 2912, the matching and classification authority 900 returns a VDE container 2916 indicating that in this one example, suppliers A 2906(A) and Z 5 2906 (N) can provide goods in the class(es) defined by trading company's 2902 request(s) 2910. In turn, trading company 2902 sends at least one VDE container 2918 to buyer A 2904 indicating that they will sell buyer A the previously requested items under the enclosed terms and conditions. In another example, there may be 10 some VDE-based (see "Ginter et al", Figures 75A-76B) negotiations between the various parties in this value chain, including between trading company 2902 and buyer A 2904.

In another example, buyer A 2904 may consult the matching and classification authority 900 directly and may then purchase 15 directly from one or more suppliers 2906.

Example: Matching And Classification Utility 900 Supports Securities Trading/Brokering

In addition to hard goods, the matching and classification authority 900 may also support securities trading. Example 3000, 20 Figure 55, shows the matching and classification authority 900 sending to a VDE-aware appliance with one or more stock trading related applications 3004 a VDE container 3010 with an administrative event and method (as described in "Ginter et al") for classifying equities related information, including, as non-limiting 25 examples, current and historical price, volume, and index

information, financial performance data for publicly held companies, forecasts, risk management information, options and futures, and the like. The classification method may also utilize rights and permissions, including access control information, permitted
5 operations, and/or expiration times and/or dates for rights management information. The classification method may also create at least one class hierarchy, class, classification scheme, category and/or category scheme using at least some rights management information and assign at least one element to at least one category
10 and/or class.

In turn, using the VDE aware appliance 3004, the stock trader 3006 sends a smart object 3012 to at least one information source 3002 asking for information in at least one class identified by the classification method. In one example, the class may be information
15 concerning "publicly traded companies with annual revenue greater than \$500M in the healthcare sector in which the CEO has been in place less than 5 and greater than 1 year and with access restricted to customers (rather than available to anyone) with access and use expiring in 90 days." The information provider(s) 3002 returns a
20 VDE container 3014 with information meeting and/or more closely meeting the stated class criteria. Based upon this and other information, the trader 3006 may go ahead and enter an order for at least one trade in at least one stock 3008. In another example, the trader may create or obtain methods that trade automatically in certain
25 classes of securities.

**Example: Matching And Classification Utility 900
Supports Trading in Currency and Debt Instruments**

Among the classes of great value to traders are the classes of items whose trading maximize profits and/or minimize losses.

- 5 Example 3100, Figure 56, shows a trader in currency and/or debt instruments 3102 sending a VDE container with market and other financial and economic information and VDE control set information 3108 to a matching and classification authority 900 with a query 3114 asking the matching and classification authority 900 to identify the
- 10 class of currency trades and/or debt instrument trades that maximizes profit and/or minimizes losses. The matching and classification authority 900 applies one or more methods to the data and returns at least one class definition 3112, the assignment of possible trades to that class 3110, and relevant control set information, such as controls
- 15 indicating who may see the information, and those that prevent unauthorized modification of the information. The matching and classification authority 900 may also return methods for executing the trade. The matching and classification utility 900 may also create at least one class hierarchy, class, classification scheme, category and/or
- 20 category scheme using at least some rights management information and assign at least some trading information to at least one category and/or class.

- 25 The example trader 3102 examines the recommendation and sends VDE containers 3118 (A, B) with trade methods and control sets to a foreign exchange market 3104 and/or to a debt instrument

market 3106 where the trades are consummated. The markets send back VDE containers 3116(A, B) with audit information indicating the results of the trading order. In another example, the matching and classification authority 900 may be instructed to send trading orders directly to the market(s) for execution. In another example the trader may send a VDE container to at least one source of relevant information asking that source to send certain information to the matching and classification authority 900. In another example, having established the desired trade(s) using the matching and classification authority 900, the trader may place the trade by phone and/or computer and/or other communications device without using VDE.

Example: Matching And Classification Utility 900 Supports Consumers Locating Services That Are Members Of A Specified Class

The services of the matching and classification authority 900 may also benefit consumers by locating certain classes of services. Example 3200, Figure 57, shows a consumer sending a VDE container 3206 to a matching and classification authority 900 asking, "which banks are in class A?" where class A are "those banks that offer the highest savings interest, no ATM fees, online/Web banking using VDE, insured accounts, free checking with balances larger than \$2,500, "image" statements (where check images rather than the actual checks are returned), and complete privacy protection (except

where legally required to disclose) for VDE based banking transactions.

The example matching and classification authority 900 sends a query in a VDE container 3208 to one (or more) information sources 5 3202 and receives one or more VDE containers 3210 with the requested information. The matching and classification authority 900 then determines which bank or banks meet the stated criteria of the consumer 3204 and then sends a VDE container 3212 with the answer to the consumer, in this example, banks A, B, and C. The consumer 10 3204 may then go ahead and execute a financial transaction, for example, transferring funds from one bank to a bank identified by the matching and classification utility 900 as offering higher interest rates, while being assured of maximal privacy for this (and perhaps other) transactions.

15 In another example, after determining which banks are in the desired class, the matching and classification authority 900 may send a VDE container to one or more banks saying that the consumer wishes to know about their services and requesting the bank to contact the consumer directly. The bank may send controls ensuring 20 the privacy of future interactions with the customer. For example, controls that apply to audit records such that only the bank and the consumer will have permission to access these records.

**Example: Matching And Classification Authority 900
Supports Class-Based Software Distribution**

VDE and the inventions disclosed in "Ginter et al" at last provide a way of ensuring that the efforts expended on creating software will be rewarded since the software can now be persistently protected, usage information can be collected, and payment ensured. These inventions also support micropayments and microtransactions, thus creating a world in which the price of software objects—any kind of objects actually—may become very small. Pay per use, rental, rent to own, and other pay as you go pricing models together with VDE may create a new explosion of creativity in software design and creation, since use prices will be low and providers can be assured of receiving payment.

The present inventions provide opportunities for software providers to more efficiently market their wares. Example 3300, Figure 58, shows a number of users with VDE installed on their appliances 3304(A-F). These people are using software (and other content). VDE meters usage of various objects and sends audit records in VDE containers 3306 (A-F) to a usage clearinghouse 300, which then sends audit records 3308 to the matching and classification authority 900. A software distributor 3302 sends a VDE container 3310 to the matching and classification authority 900 with a query asking who is in the class, "buys Java applets, with pay per use pricing, and for which the cost per use is between \$.0001 and \$.001?"

The matching and classification authority 900 returns a VDE container 3312 with a list of names and (network) addresses of those matching, or most nearly matching the desired characteristic(s). The software distributor 3302 then sends at least one VDE container 3314
 5 with at least one software object, and/or a pointer to a software object, in this case a Java applet, and perhaps other relevant information, such as VDE control sets and/or various metadata describing some aspect of the object, for example, what it does, what it costs, etc. The user may then elect to use the object or not. In another example,
 10 instead of individuals or VDE nodes, the users might be groups of nodes, users, organizations, parts of an organization, and others that can be identified as belonging to at least one class. In this case, the software may be offered to some or all members of class, group and/or organization.

15 **Example: Matching & Classification Utilities Provide Services To Authenticated Classes of Nodes, Users, Content Services and/or Transaction Services**

Among the ways in VDE nodes, users, content services, and/or transaction services can be authenticated is through the use of
 20 certificates and/or other digital credentials issued by an appropriate trusted third party, a certifying authority 500, for instance, that warrants and/or attests to some fact or facts, which may include membership in one or more classes, including the identity class. Figure 59 shows a non-limiting example 3400 in which a number of
 25 matching and classification authority 900(1-N)s, each of which may

provide its services to different classes, where class membership is authenticated using certificates and/or other digital credentials. In other examples, additional authentication mechanisms may be used in combination with, or instead of certificates, such as information

5 known only to the user, VDE node, and/or appliance, including passwords, cryptographic keys, information stored in hardware, and/or software.

In example 3400, Figure 59, commerce participants including, the matching and classification authority 900, may make rules and

10 consequences conditional on class definitions and/or the assignment of members to a class. Class membership may be authenticated by a certificate and/or other digital credential issued by one or more commerce participants in addition to, and/or instead of a trusted third party such as a certifying authority 500. For example, a certificate

15 and/or other digital credential may attest to user identity, that is, that a user is the user he or she claims to be. Nodes, devices, networks, servers, clients, and services, are other non-limiting examples of other commerce elements that may be authenticated with certificates and/or other digital credentials. Any commerce participant may issue a

20 certificate, but other participants are not required to accept a given certificate as an authenticator.

Figure 59 shows multiple matching and classification authorities 900(1)-900(N), each of which may provide services to members of a particular class, in these non-limiting examples, to

nodes in a particular deployment (matching and classification authority 900(1)), in a particular vertical segment and/or institution of society, such as Higher Education (matching and classification authority 900(2)), one or more value chains, such as business information content providers (matching and classification authority 900(3)), and/or a particular transaction and/or service arena, such as hard goods trading (matching and classification authority 900(n)). Other commerce utility systems, a certifying authority 500 shown in Figure 59, for instance, may also provide services to a class. In each of these instances, the services of the matching and classification authority 900 may depend upon finding certain authenticating certificate(s) and/or other digital credentials on the appropriate VDE nodes.

For example, matching and classification utility 900(1) provides services to nodes 3410(1-n) in the deployment 3402 administered by VDE administrator 800. Each node may have a certificate 3412 issued by certifying authority 500(1) that provides services to this deployment.

In another example, certifying authority 500(2) provides certificates and/or other digital credentials to participants in a higher education value chain 3404 consisting of an arbitrary number of colleges and universities 3416(1)-3416(n), providers 3418(1) and students 3418(n), and a matching and classification utility 900(2) that provides classification, matching, and selection services to higher

education 3404. In one example, the matching and classification utility 900(2) only provides services to value chain participants who have a certificate 3420 issued by certifying authority 500(2).

Matching and classification utility 900(3) services can be
 5 provided only to members of one or more classes based on certificates issued by a certifying authority 500(3). In one example, the class is participants in a business information value chain 3406, comprising an arbitrary number of content providers 3424(1)-3424(n), an arbitrary number of users and/or consumers of business information
 10 3422(1)-3422(n), and a certifying authority 500(3) that issues certificates and/or other digital credentials to members of the value chain 3406.

In addition to membership in certain deployment, institutional, and/or content usage classes, the matching and classification authority
 15 900(4) may provide services to members of a certain transactional value chain, in one example, traditional transactions 3408. In this example, a certifying authority 500(4) issues certificates 3432 to one or more companies 3428(1)-3428(n) and one or more trading companies 3430(1)-3430(n). In another example, other participants
 20 may receive certificates and/or other digital credentials, including banks and financial institutions, government authorities, for example, tax and/or customs authorities, consumers, suppliers, and/or transportation companies. The matching and classification utility 900(4) provides services only to those entities and/or individuals in

possession of the appropriate certificate 3432 indicating that the holder of the certificate is an authenticated participant in one or another trading value chains.

In other examples, a commerce utility system may provide
5 services to more than one class where class membership is indicated by at least one certificate and/or other digital credential issued by a certifying authority 500 and/or value chain participant. In one example, matching and classification authority 900 might provide services to the class "Higher Education" and to the class "K-12
10 Education."

Possession of a certificate and/or other digital credential may be among the information used to classify a node, user, appliance, device, entity, and/or other commerce participant, and rules and consequences can be made conditional on membership in one or more
15 authenticated classes and/or on the degree of confidence the rule provider has in the trustedness of the certificate and/or other digital credential issuer. In one example, a discount to higher education may be larger if the root for chain of trust for a given certificate is a well-known, highly respected and trusted third party, such as an
20 authoritative accrediting organization, and smaller if the root belongs to the MIS department of a small college. In this example, the provider is willing to grant a higher discount when there is higher certainty that the recipient is in fact a member of a specific class or classes.

Example: Matching And Classification Authority 900 Supports Control Sets Based In Part On Employee Classes, Content Classes, And/Or Certificates And/or Other Digital Credentials

5 Chain of handling and control enables, amongst other things, multiple organizations to work together in secure, trusted, efficient, cooperative commerce processes. One way in which the present inventions extend these ideas is through control sets with rules and usage consequences that may be based in part on classes and the
10 assignment of persons, entities, devices, content, services, or other process elements to classes of one kind or another by the matching and classification authority 900.

One example technique to classify employees is at least in part according to their roles and responsibilities within an organization.

15 The matching and classification utility 900 supports classification, matching, creation and/or modification of VDE control set(s) based at least in part the class assignment of individual and/or groups of employees. In part by virtue of their employee classification, at least one employee may receive certain rights management information,

20 for example, permission to access certain classes of information or permission to perform one or more permitted operations, transactions and/or events.

Example 3500, Figures 60A-60C shows a nurse 3504(1), physician 3504(2), and billing clerk 3504(3) all work directly for an example hospital. The present inventions are in no way limited to

hospitals, but apply to any organization, group, entity, and/or institution with at least some defined roles and responsibilities and/or other class definitions that apply to employees, members, and/or others associated, affiliated, and/or employed by the organization,

5 group, entity and/or institution. Rights management information may be part of the claim definition, for example, permissions to view, modify, excerpt, and so on.

Control sets may provide permissions conditional on employee class, for example, certain classes of employees may modify certain

10 information and/or classes of information in a database while others may not. Class membership may be indicated by digital credentials, non-limiting examples of which include digital certificates and digital membership cards. Controls may be conditional on other information as well, for example, some computers and/or display devices may not

15 show certain classes of data or updates to certain data elements may not be performed from certain computers or display devices.

Another example role is a representative 3504(4) of an insurance company 3508, who may have access to certain classes of hospital information by virtue of her or his class membership(s),

20 some of which may derive from her or his role in the insurance company 3508 and/or from the insurance company's relationship with the hospital and/or with some of the hospital's patients and/or staff. The present inventions are not limited in application to an insurance company, but may be applied to any individual, group, organization,

004020-69366160

entity, and/or institution with whom the example hospital and/or other entity has some form of relationship.

An example insurance company 3508 have received a certificate in a VDE container 3534 issued by certifying authority 500(1) attesting to the identity of the insurance company. In another example, this certificate and/or one or more additional certificates may attest to the fact that the insurance company has the appropriate charter, licenses, and other grants of authority to be in the health insurance business. The certifying authority 500(1) may also send a certificate in a VDE container 3532 attesting to hospital's identity. In another example, this certificate and/or one or more additional certificates may attest to the fact that the hospital has the appropriate charter, licenses, and other grants of authority to provide hospital and related services.

The insurance company 3508 may have sent one or more control sets to the hospital in a VDE container 3542. These controls may be based in part on one or more certificates 3530 and/or on the classification output of an example matching and classification utility 900(2) operating within and/or on behalf of the insurance company 3508. The controls in container 3542 may indicate which individuals are actually employees of the insurance company, employee membership in one or more classes, permissions associated with that individual and/or class, and/or permissions associated with specific devices, communications channels (devices, ports, etc.), and/or

processes. In this one example, the hospital matching and classification utility 900(1) may create controls using the same and/or additional classes and controls received from the insurance company 3508.

- 5 The insurance company 3508 may also provide one or more certificates to the hospital attesting to the fact that one or more information sources within the insurance company are to be taken by the hospital as trusted sources. Lastly, in this regard, the insurance company may issue one or more certificates on behalf of each
- 10 employee attesting that each is in fact an employee of the company and may have certain authorizations.

- In example 3500, Figures 60A-60C, a matching and classification utility 900(1) has identified various classes of hospital employees using information from at least one hospital information
- 15 system 3502 and/or VDE node. The matching and classification utility 900(1) may also make use of certificates issued by a certifying authority 500(1) outside (a trusted third party) and/or a certifying authority 500(2) inside the hospital. Using data dictionaries 3522, patient records 3520, various employee information 3524, automated
- 20 procedures, and/or other means, the matching and classification utility 900(1) creates classes 3526 of patient record information and associates one or more control sets 3528 with each class of information and/or with a patient record as a whole. These control sets may specify who has permission to use and/or modify the record

and/or an element(s) of the record that has been assigned to one or more classes on which the control set(s) may in part depend. In one example, the class based controls 3528 may be combined with other hospital and/or other party controls, controls from the insurance
 5 company 3508, to create new controls 3510(1)-3510(n) associated with patient records 3512(1)-3512(n).

The example nurse 3504(1) and physician 3504(2), for example, may be able to view, modify, print, and/or copy patient's name, address, and other similar descriptive information, next of kin,
 10 insurance, and medical information in accordance with controls 3510(1) and 3510(2), respectively . In another example, some members of the class "nurse" and/or the class "physician" may have different permissions by virtue of membership in one or more additional classes. A physician who is in the class "hospital
 15 administration" may have different permissions, for example, to billing records.

A billing clerk 3504(3) in the hospital may not have permission in control set 3510(3) to view medical information and/or next of kin, and in this example may be restricted to name and other patient
 20 descriptive information, insurance information, and billing information from the patient record. A representative 3504(n) of the insurance company may have permission by virtue of control set 3510(n) to view, but no permission to modify, print, or copy patient record 3512(n). In each of these examples, the VDE control sets are

at least partially conditional on the presence and/or absence of certain certificates indicating membership in one or more classes.

The present inventions may be applied to any information, person, group, device, network, service, database that pertains to any
5 commerce activity whatsoever, and regardless of whether the parties to the commerce activity are individuals, groups, entities, organizations, institutions, nations, and/or societies.

**Example: Matching And Classification Authority 900
Supports Classes And Matching Based In Part On
10 Workflow And Work Process Automation**

Not only do the present inventions enhance commerce processes that principally entail information, but the present inventions enhance workflow and work process automation as well. Example 3600, Figure 61, shows PCs 3608(a-c) functioning as station
15 controllers connected to various manufacturing devices 3610 (a-c). These station controllers that exchange data and instructions with the equipment they control and/or manage. The station controllers are VDE-enabled. In another example, the manufacturing equipment may also have VDE nodes installed.

20 An example work in progress (WIP) and/or manufacturing control application 3606 keeps track of the overall manufacturing processes and exchanges information with other applications not shown, such as materials management, materials ordering, order

databases, logistics, inventory, accounts payable, accounts receivable, general ledger, human resources, time cards, and the like.

An example employee 3602 of the company sends a query 3612 in a VDE container 3604 to an enterprise matching and classification utility 900 within the company asking, "which VDE-controlled equipment will be available 3rd shift today, for 2 hours, capable of performing operations xyz with a nominal error rate of less than .0001 per cent?" The enterprise matching and classification utility 900 may request data 3616 from the WIP/manufacturing process control application 3606 and/or may already have access to the required data, indicating equipment availability, security level, capabilities, and statistical error rates. The WIP/manufacturing process control application 3606 may return a VDE container 3618 with the requested information. Based upon the query and available information, the matching and classification utility 900 responds by sending a VDE container 3620 to the employee 3602 with the answer, "equipment B and equipment C." In turn, the employee 3602 sends another VDE container 3622 to the WIP/manufacturing process control application 3606 with VDE a control set(s) indicating B and C should be scheduled for 2 hours on 3rd shift to do xyz operations. As part of this particular chain of handling and control, the WIP/manufacturing process control application 3606 sends VDE container 3624 to the VDE-enabled station controllers for equipment B or C with control sets that schedule work and specify the manufacturing processes and/or "recipes" for those specific

5

10

15

25

transactions using VDE. Example 3700, Figure 62A-62B, shows a certifying authority 500 operated by and/or on behalf of a government issuing a certificate and/or other digital credential indicating jurisdiction, namely, country. The certificate is sent in a VDE container 3710(a) to a VDE administrator 800. The government certifying authority 500 also sends certificates in VDE containers 3710(b)-3710(n) to the government matching and classification authority 900 attesting to the "country," in one example, the United States, and another certificate 3716 attesting to the fact that the matching and classification authority 900 is indeed an authorized service of the United States government.

In one example, the government matching and classification authority 900 has created tax class definitions 3712 and tax control sets 3714 that apply those definitions in various classes of circumstances, including the presence of certain control-related information, such as an appropriate country certificate from an authorized issuer of such jurisdictional certificates. The tax class definitions 3712, tax control sets 3714, and government authority certificates 3716' are sent in at least one VDE container to a rights and permissions clearinghouse 400, who, in one example, redistributes the tax class definitions 3712(1), tax class control sets 3714(1), and/or government authorization certificate 3716(1) to content providers 3702, service providers 3704, and other value chain participants. The certifying authority 500 also sends country certificates to one or more VDE administrators 800 who, in turn, send country certificates 3710'

to VDE nodes 3706(A)-3706(n) in their deployment. When content provider 3702 distributes content of any kind, the appropriate tax control sets 3714(A) are also included in the VDE container. A tax control set is applied whenever content is used in accordance with a tax class and provided that the appropriate jurisdictional certificate 3710' is present on the VDE node 3706(a). For instance, a VDE node may have a tax control set to be applied to sales of a class of content, specifically, to the class of "software." Whenever a software vend occurs, the appropriate tax is applied according to these rules.

In another example, the various country and government authority certificates may be sent directly from the certifying authority 500 to one or more VDE nodes 3706. The VDE controls that implement tax policy for one or more classes may also be sent directly to VDE nodes 3706 and/or to VDE administrators 800.

Example: Classification May Be Used In Automatically Selecting The Proper Display Context Based On Classes Of Information

Content objects may be displayed using one or another formats according to class membership of that object. In example 3800, shown in Figure 63A, a matching and classification utility 900 provides content class information 3810 to information providers 3802. A consumer 3807(1) previously has sent a VDE container to a provider of sports information 3802(1) indicating interest in "class b" stories, and perhaps other classes as well. The sports information provider 3802(1) sends back a VDE container 3808(1) with one or

more stories in "class b," perhaps "all stories about baseball, New York, Yankees, history, heroes with permission to print" an example of which is 3814(1), along with, in this example, one or more VDE control sets. The VDE container 3808(1) is received by a customer

5 3807(1) who then displays the content 3814(1) using one or another page formatting technologies based on macros, scripts, administrative events, methods, and/or other techniques. Also included in the VDE container is an image 3812(1) that was selected by the information

10 this example, perhaps the image 3812(1) is a faint image of Joe DiMaggio. This image also meets the criteria of "permission to print."

Example 3800, Figure 63A, also shows another instance in which a different consumer 3807(n) previously has informed a nature

15 information provider 3802(n) of interest in class A stories. Here the information provider sends a VDE container 3808(n) that holds a class of stories different from the class of interest in the previous example. This VDE container 3808 holds a "class A" story, an example of which is 3814(n), that is displayed with a different image

20 3812(n), one that is appropriate to the story class, in this case, an image of a dog.

The class assigned to each story may be carried in the container as metadata for one or more story objects in another example. An example Web browser may request of the information provider an

image appropriate to that class, which if available, would be sent in another VDE container.

Class may affect display rules in other example ways as well. For instance, several team sports news stories may be displayed in a

5 Web browser window in which a scene from a football or basketball game is faintly discernible in the background. Which image is displayed may be determined by the user's preferences given the classes of stories being presented on the page. The user, may have looked most at stories about the New England Patriots and a Patriots-

10 related image may be displayed as background even stories about teams in addition to (or even instead of) the Patriots were being displayed.

In (another) example 3850, shown in Figure 63B, a matching and classification utility 900 provides class information to a provider

15 3852(1). Previously, one user 3857(1) has indicated to the provider 3852(1) that she prefers information in topic class A more than information in topic class C and information that costs less than \$.50 per article while the other user 3857(n) has the opposite preferences and is not price sensitive. A matching and classification utility 900

20 may provide classification information, class assignments for objects, administrative events, and/or methods for these and related purposes. Regardless, the information provider 3852(1) sends the identical VDE container 3858 to each of the users 3857. However, their browser and page formatting software 3856 produces different pages in

5 illustrates, the class preferences of users may affect the way in which the user interacts with content in various classes.

10 classification on documents and/or establishes topic classes and/or
topic classes of greatest interest to the user.

Example: Information May Be Classified With Respect To Difficulty -- And This May Pre-Determine An Appropriate Interface

15 The class of content and/or the class of user may determine at
least one display characteristic. One interesting example way of
classifying content is with respect to its difficulty. One example
measure of difficulty is reading level, which may reflect such aspects
as vocabulary and/or complexity. It is well known that children (and
20 adults) of the same approximate age read at different levels. In the
example 3900, shown in Figure 64, a provider sends a VDE container
3902(1) with text at a 4th grade reading level and controls indicating
that when used by a person reading at that level, the charge is 50
cents. However, if a person reads at less than the 4th grade level, the

charge is only 40 cents. "Reading level" may be indicated by a certificate and/or other digital credential.

A matching and classification utility 900 may send administrative events and/or classification methods 3910 to

5 information providers, one or more other value chain participants, or to the students appliances directly. These methods may, for example, classify documents according to the degree of difficulty and create or modify controls for the whole document and/or subparts of the document, controls that may indicate the different prices for users at

10 different reading levels. The matching and classification utility 900 may also send administrative events and methods to users that know how to make the document appear in the example browser at a lower reading level.

The example VDE container 3902(1) is sent from the provider

15 to a child 3906(1) in the 4th grade who is reading that at that level. When the child opens the container to view (or otherwise use) the text, she or he is charged 40 cents (which might be paid by a third party such as a school and/or parent. The child sees the text as written 3904(1)

20 Example 3900, Figure 64, also shows the exact same document being read by a student 3906(3) in the class of 2nd grade readers. Now the browser displays the document 3904(3) modified by methods that may make the syntax less complex and may substitute simpler words and/or phrases for harder ones. A similar example

document and controls in a VDE container 3902(n) involving a 12th 3906(2) and 9th grader 3906(n) is also shown.

In other examples, the prices may be higher when users are reading text below their capabilities, they may be offered discounts for reading at a higher level, and/or they may be charged more for reading on different levels since modifying the text is a value added process, and providers of that value may wish to be compensated for their efforts.

Example: Classification May Describe Degree Of Focus Of The Content Unit Or Portion On A Topic, Or Characteristics Related To Conventional Formatting, Such As File Type

Sometimes the most interesting and/or useful content is at the intersection of various topics. Also, user often want content in a form or format that will be most useful, and most practical, to them. In the example 4000, shown in Figure 65, a matching and classification utility 900 receives from user 4002 a VDE container 4004 holding a request for documents in the class, "on economics and politics, costing less than \$5.00, and in MS Word format." The matching and classification utility 900 responds in this example by providing in a VDE container 4006 at least one Uniform Resource Locator (URL) that points to the location of the document(s) on the World Wide Web.

The user 4002 in this example sends a message in a VDE container 4008 asking for the document identified in the URL. A

provider sends back a VDE container 4012 with the desired document 4010 that has been classified by the matching and classification utility 900. In this example, parameter data is provided in the form of scores indicating the relative emphasis on various topic classes, including

5 Economics (score=15), Politics (score=7), and Religion (score=2). Also indicated is the format of the content, which in this example is the desired MS Word. Also conveyed in the VDE container 4012 are a control set indicating, among other things, that the price is \$2.98 and no modifications are allowed.

- 10 In other examples, the classes might have been much more narrow, for example, "Clinton," "Greenspan", Federal Reserve Policy, Interest Rates. Also, the customer might have requested only those documents for which controls could be obtained that permitted modifications and/or excerpting and/or derivative works. In another
- 15 example, the matching and classification utility 900 may send one or more administrative events and/or classification and/or matching methods to the customer so that these methods could be applied by the customer. Alternatively, the customer may have send one or more methods as part of a smart object to one or more information
- 20 providers in search of information meeting the desired criteria.

**Example: The Atomic Aspects Can Support
Automated Extraction Of Portions Of A Content Unit
For Aggregation With Topically Consistent Portions
And/Or Units From Other Sources**

5 Not only may people desire specific information, but that
information may come from different parts of the same object or parts
of two or more objects. The matching and classification utility 900
can support the use of smart, classification based extraction and
aggregation methods. as shown in example 4100, Figure 66, where
10 two documents 4102(1,2) have been classified by the matching and
classification utility 900 into "chunks" or subobjects reflecting topic
classes and VDE controls have been provided for each chunk. The
"chunking", classification, and control set creation may be performed
and stored in a database and/or may be performed "on the fly" or as
15 needed.

To satisfy a request for information concerning travel to and in
the United Kingdom plus background information, an information
provider extracts parts of each document in the desired classes and
creates a new, recombinant document comprised of the subobjects
20 and packages the new document with appropriate controls in a VDE
container 4102(n). VDE controls for the subobjects may also be
carried along and may be modified by the provider and/or other
participants in a chain of handling and control.

The request for information may have been generated using any
25 query and/or search method, including semantic, Boolean, heuristic,

concept-based, and other approaches, and may have been generated explicitly and intentionally by a user and/or other value chain participant, or may have resulted more automatically from the analysis by a matching and classification utility 900 of usage, audit, and/or other rights management information and/or of "info exhaust," and/or of preference, demographic, and/or psychographic data and/or classes of data.

In another example, the matching and classification utility 900 may have sent administrative events and/or classification, search, and/or subobject combining methods 4106 to a provider and/or to a user for execution under the control of a local VDE node.

**Example: Matching And Classification Utility 900
Supports Classification For Subsets Of Content
Within A Content Unit (Nested Virtual
Classifications)**

Not only may the matching and classification utility 900 assist in locating whole objects, it may also assist in identifying and/or classifying any number of subobjects for a given whole. New control sets may be associated with each of these subobjects. These new control sets may differ from the control set that applies to the object as a whole. This capability allows matching and classification utility 900 and others value chain participants to locate desired classes of content that may be part of a larger object and possibly to retrieve, pay for, manage, use, or combine these parts in addition to, and/or instead of the whole object.

In example 4200, Figure 67, a VDE container 4202 created by the matching and classification utility 900 holds a text document that in this non-limiting example is the US "State of the Union Address." The matching and classification utility 900 has first classified the
5 entire document in the class "politics." The matching and classification utility 900 has also identified various subparts or subobjects and has classified each them into different classes or categories. In this example, the different classes represent different topic categories.

- 10 A user and/or other value chain participant may request only subobjects that have been categorized in one or more desired class(es). The desired subobjects may be packaged in a VDE container 4204 along with appropriate VDE controls for both the overall, new composite object and/or for each of the desired
15 subobjects. (The VDE controls can also be sent separately from the content subobjects.) These controls may pertain to the new whole object created from subparts selected on the basis of their membership in one or more specified class(es) and/or to the whole, new object comprised of these selected subobjects. In another
20 example, the subobjects may be drawn from different documents sharing the same overall topic, for example, from State of the Union addresses given in different years.

In one example, any value chain participant may send distribute one or more subparts of the original object.

In another example, the matching and classification utility 900 may send one or more administrative events and/or methods 4206 to value chain participants who may execute the methods to perform the operations to identify subobjects and/or to subset the whole object in
 5 to parts based on class assignments.

Search engines can also use the subobject classifications to provide more precise results. For example, a search engine may have retrieved the State of the Union Address because the search criteria were "US politics speeches," but the whole or part of the object may
 10 also have been retrieved searching for "US politics speeches welfare" or "speeches US president defense."

**Example: Matching And Classification Utility 900
 Supports Classes Of Classes Based On Object
 Identifier Standards And/Or Other Object Metadata**

15 Among the numerous advantages of the present inventions is the ability to create classes of classes based in part on rights management information. The feature may enhance search efficiency by enabling search engines to locate members of classes provided by any of numerous schemes for object naming and object metadata that
 20 have been proposed. For example, the IETF Uniform Resource Locator (URL), the International Standard Book Number (ISBN), International Standard Serial Number (ISSN), MARC library catalog records, and the recent proposed "Dublin Core"(Weibel, Stuart, Jean Godby, Eric Miller, and Ron Daniel, "OCLC/NCSA Metadata
 25 Workshop Report", URL <http://www.oclc.org:5047>

/oclc/research/conferences/metadata/ dublin_core_report.html) are non-limiting examples of prior classifications that can themselves be classified using the present inventions.

Example 4300, Figure 68A-68B, shows several objects

5 4304(1)-4304(n) each of which may have associated with it various metadata 4302(1)-4302(n) that locates the object in one or more classes, non-limiting examples of which may include network address (URL), price, control set information, permission strings, subject category, title, and publisher.

10 In example step "1," object metadata 4302 is sent to a matching and classification utility 900 which (example step "2") may create new "classes of classes" 4306. These new classes 4306 are then made available on a Web page 4308 (example step "3") to interested parties who may then search for objects according to their membership in

15 one (or more) of these new classes of classes. In example step "4" an interested party 4320 sends a VDE container with a request to retrieve the Web page 4308 with the classes of metadata information. The Web server (in example step "5") returns a copy of the page 4312 to the interested user 4320, who (in example step "6") sends a VDE

20 container with a query to the matching and classification utility 900 asking, in this example, for objects in new class 3 that cost less than \$1.98, and that grant a "modify" permission. In example step "7," the matching and classification utility 900 returns a VDE container 4316 with list of objects that match the criteria. The matching and

classification utility 900 may, in turn, provide URLs or other location information for at least one member of the desired class(es) in the list in container 4316.

Example: Matching and Classification Utility 900
5 Supports Electronic Gambling

Electronic gambling may be among the services that will drive Internet growth in coming years. Such services raise many questions for both providers and for users or players of the service. For example, providers want to be able create attractive, compelling
10 entertainment experiences and in doing so, capture an important share of their intended markets. Users of these services will of course want to locate the most stimulating, entertaining, and perhaps most of all, rewarding gambling experiences.

Gambling providers may, in one example, differing classes of
15 games, rules, payoffs, odds, and/or interfaces. The present inventions can assist players in identifying the nature of various classes and locating specific instances of one or more classes. Within a particular class of games, for example, players may be particularly interested in the odds at the game of blackjack. In one example, a player may
20 prefer playing with a single digital deck of 52 cards and a particular number of (emulated) shuffles rather than with say four decks and more shuffles, the affect of the latter being to create a more random distribution. Smaller decks and fewer shuffles may make it easier to count cards and/or to otherwise increase the odds in favor of the
25 player, or at least in favor of the experienced, knowledgeable player.

In example 4400, shown in Figure 69, an arbitrary number of gamblers 4402(1)-4402(n) whose usage information flows in VDE containers 4404(1)-4404(n) to a usage clearinghouse 300. The usage clearinghouse 300 sends in VDE containers 4406 at least some of this
5 usage information to a matching and classification utility 900. In another example, the usage information may be sent directly from at least one user to the matching and classification utility 900. In this example, an arbitrary number of gambling providers 4406(1)-4406(n) may also send in VDE containers 4408(1)-4408(n) descriptive and/or
10 usage information to the matching and classification utility 900. Based on available information from relevant sources, the matching and classification utility 900 may create one or more classes and assign one or more providers, services, and/or users to a class. These class definitions may at least in part be based on privacy-related
15 control information.

In this one example, a gambler 4402(1) sends a VDE container 4410 with a query concerning best odds for blackjack to a matching and classification utility 900, who, in turn, sends back a VDE container 4412 with content indicating that gambling provider 2 gives
20 the best odds in blackjack, "best" here meaning those most favorable to the player. In another example, the gambler may then contact gambling provider 2 to play, and the play may consist of a series of communications in VDE containers between the gambling provider and the gambler.

**Example: Matching and classification utility 900
Supports Electronic Ticket Sales and Distribution**

The performing arts, exhibitions, theaters, and conferences are some non-limiting examples of events that may require tickets for admission. Electronic ticket agencies on the Internet and other electronic arenas provide a connection between the consumer and producers of the event. Consumers may want to know such information as the nature of the event, what classes of tickets exist for a given event and/or class of events, the price for different classes of tickets to an event, the availability of different classes of tickets to different classes of events, and similar information.

In the example 4500, shown in Figure 70, an arbitrary number of users 4504(1)-4504(n) whose usage information is sent in VDE containers 4508 to a usage clearinghouse 300 who, in turn, may send at least some of this usage information in at least one VDE container 4526 to a matching and classification utility 900. The usage information may reflect past ticket purchases, prices, seating preferences, preferred payment methods, preferred theaters and other venues, and other user preference and historical information.

Various ticket agencies 4506(1)-4506(n) may send information about specific events 4512 (1)-4512(n) and/or information about agency services 4514(1)-4514(n) to the matching and classification utility 900. In another example, an event promoter may send event information directly to the matching and classification utility 900.

5

10

15

* * * *

20

[illegible]

WE CLAIM:

- 1 1. A method including:
 - 2 (a) determining at least one class, class hierarchy, classification
 - 3 scheme, category or category scheme;
 - 4 (b) assigning cases, persons, and/or things to said determined
 - 5 class, class hierarchy, classification scheme, category or category
 - 6 scheme; and
 - 7 (c) selecting and/or matching cases, persons, and/or things
 - 8 based at least in part on said class, class hierarchy, classification
 - 9 scheme, category or category scheme and/or said assignment,
 - 10 wherein at least one of said steps (a)-(c) includes the step of
 - 11 using at least some rights management information.
- 1 2. A method as in claim 1 wherein said using step includes
- 2 using at least one control set.
- 1 3. A method as in claim 1 wherein said using step includes
- 2 using at least some information for controlling use of digital
- 3 information.
- 1 4. A method as in claim 1 wherein said using step includes
- 2 using at least some information for controlling at least one
- 3 transaction.
- 1 5. A method as in claim 1 wherein said using step includes
- 2 using at least some information for controlling at least one event.

1 6. A method as in claim 1 wherein said using step includes
2 using at least some information for controlling at least one
3 consequence of digital information use.

1 7. A method as in claim 1 wherein said using step includes
2 using at least some information for controlling at least one
3 consequence of at least one event.

1 8. A method as in claim 1 wherein said using step includes
2 the step of using at least some information for controlling at least one
3 consequence of at least one transaction.

1 9. A method as in claim 1 wherein said using step includes
2 using at least some information outputted by a rights management
3 process.

1 10. A method as in claim 1 further including the step of
2 outputting at least some rights management information.

1 11. A method as in claim 1 wherein at least one of steps (a)-
2 (c) includes using at least one secure container.

1 12. A method as in claim 1 wherein at least one of steps (a)-
2 (c) includes using at least one protected processing environment.

1 13. A method as in claim 1 further including the step of
2 using at least one of the techniques set forth at pages 60-82 of this
3 specification.

004020-69286460

1 14. A method as in claim 1 wherein said using step includes
2 using at least one or more rules and/or their consequences.

1 15. A method as in claim 1 wherein at least one of steps (a)
2 and (b) includes at least one of the following steps:

3 (a) using at least one statistical technique identifying at least
4 one cluster of cases sharing similar profiles and/or features;

5 (b) using numerical taxonomy;

6 (c) using at least one of cluster analysis, factor analysis,
7 components analysis, and other similar data reduction/classification
8 technique;

9 (d) using at least one pattern classification technique,
10 including components analysis and neural approaches;

11 (e) using at least one statistical technique that identifies at least
12 one underlying dimension of qualities, traits, features, and/or
13 characteristics, and assigning parameter data indicating the extent to
14 which a given case has, possesses, and/or may be characterized by the
15 underlying dimension, factor, class, and/or result in the definition of
16 at least one class and/or the assignment of at least one case to at least
17 one class;

18 (f) using at least one statistical method employing fuzzy logic
19 and/or fuzzy measurement and/or whose assignment to at least one
20 class entails probabilities different from 1 or zero;

21 (g) using a Bayesian statistical classification techniques that
22 uses an estimate of prior probabilities in determining class definitions
23 and/or the assignment of at least one case to at least one class;

24 (h) using at least one statistical and/or graphical classification
25 and/or data reduction method that uses rotation of reference axes,
26 regardless of whether orthogonal or oblique rotations are used;
27 (i) using at least one statistical method for two and three way
28 multidimensional scaling; and
29 (j) using at least one knowledge based approach to
30 classification.

1 16. A system including:
2 an automatic class generator that generates at least one class,
3 class hierarchy, classification scheme, category or category scheme;
4 an automatic class assigner that assigns cases, persons and/or
5 things to said determined class, class hierarchy, classification scheme,
6 category or category scheme; and
7 at least one further component for automatically searching,
8 selecting and/or matching cases, persons, and/or things based at least
9 in part on said class, class hierarchy, classification scheme, category
10 or category scheme and/or said assignment,
11 wherein said system uses at least some rights management
12 information.

3 least one class based at least in part on some rights management
4 information.

1 20. A Commerce Utility System as in claim 18 wherein the
2 component based service function matches persons and/or things
3 based at least in part on at least some rights management information.

1 21. A Commerce Utility System as in claim 18 wherein the
2 component based service function selects persons and/or things based
3 at least in part on at least some rights management information.

1 22. A Commerce Utility System as in claim 18 wherein the
2 component based service function narrowcasts information to
3 recipients based at least in part on at least some rights management
4 information.

1 23. A system or method including:
2 a computer network and
3 a control arrangement within the network that determines
4 and/or uses at least one of the following through use of rights
5 management information:
6 (a) class hierarchy,
7 (b) class structure,
8 (c) classification scheme,
9 (d) category, and
10 (e) category scheme.

004020 69266160

3 selecting, and/or matching at least one class based at least in part on
4 rights management information.

1 35. A method for performing at least one protected
2 processing environment operation including the step of defining,
3 assigning, selecting, and/or matching at least one class based at least
4 in part on rights management information.

1 36. A method of pushing information including the steps of
2 classifying recipients and/or information to be sent to said recipients
3 based at least in part on rights management information, and selecting
4 said information to distribute to said recipients based at least in part
5 on said classifying.

1 37. A method of pushing information including the steps of
2 classifying recipients and/or information to be sent to said recipients
3 based at least in part on rights management information, and
4 matching at least a portion of said information with at least one class
5 of said recipients based at least in part on said classifying.

1 38. A method of pushing information as in claim 37 further
2 including the step of creating a classification scheme and/or hierarchy
3 using at least some rights information.

1 39. A method of pushing information as in claim 37 further
2 including the step of assigning at least some information and/or at
3 least one recipient to a class or category, said assignment based at
4 least in part on rights management information.

001020 00000000

1 40. A subject switch for matching subscribers and/or
2 recipients desiring information in one or more classes with one or
3 more sources of information, wherein the subject switch matches at
4 least one subscriber and/or participant with at least one information
5 source on a mapping based at least in part on rights management
6 information.

1 41. A subject switch as in claim 40 wherein said information
2 source:

3 selects at least some information, said selection based on at
4 least one class, and wherein said assignment of said at least some
5 information to said at least one class is based at least in part on rights
6 management information; and
7 sends at least some said selected information to said subscriber
8 in accordance with said subscriber's subscribing to said class of
9 information.

1 42. A subject switch as in claim 40 wherein at least one of
2 said subject switch, said subscriber and/or participant and said
3 information source includes at least one computer providing a
4 protected processing environment.

43. A subject switch as in claim 40 wherein at least one subscriber and/or participant uses rights management information at least in part to persistently subscribe to at least some information provided by at least one information source.

[illegible]

1 44. A subject switch as in claim 40 wherein the subject
2 switch includes means for using at least one class definition for said
3 mapping.

1 45. A subject switch as in claim 40 wherein the subject
2 switch includes means for responding to a subscriber and/or
3 participant request by providing information indicating information
4 sources in at least one specified or desired class.

1 46. A subject switch as in claim 40 further including a
2 messaging service for use by at least two of said subject switch, said
3 subscriber and/or participant and said information source and/or
4 participant to communicate electronically.

1 47. A subject switch as in claim 46 wherein said electronic
2 communications uses at least one secure container.

1 48. A subject switch as in claim 40 wherein at least one of
2 said subject switch, subscriber, or information source uses at least one
3 control set associated with at least some information received by at
4 least one subscriber.

1 49. A digital narrowcasting arrangement comprising:
2 a computer; and
3 at least one classifying element used to select content to
4 narrowcast to recipients based at least in part on rights management
5 information.

1 50. A digital narrowcasting arrangement as in claim 49
2 wherein the classifying element classifies at least one of (a) a
3 recipient, and (b) content, based at least in part on rights management
4 information.

1 51. A digital narrowcasting arrangement as in claim 49
2 wherein said classifying element defines at least one class using at
3 least some rights management information.

1 52. A digital narrowcasting arrangement as in claim 49
2 wherein the classifying element assigns at least some content to at
3 least one class, said assignment based on at least some rights
4 management information.

1 53. A digital narrowcasting arrangement as in claim 49
2 wherein the classifying element defines at least one class based at
3 least in part on content selections previously made by the recipients
4 and/or profiles generated based at least in part on recipient input.

1 54. A digital narrowcasting arrangement as in claim 49
2 wherein the classifying element sends a content request including
3 classification data and destination information to at least one
4 provider.

1 55. An information distribution system including: a
2 computer network; and a selection arrangement that selects
3 information for use by individual recipients using classes based at
4 least in part on rights management information.

3 a communications component that receives directory requests;
4 and
5 a response component that uses said classification to respond to
6 directory requests while preserving confidentiality of said
7 confidential information.

1 69. A directory services system as in claim 68 wherein said
2 response component uses at least one classification process to classify
3 items in a directory, and uses results of the classification process, at
4 least in part, to respond to directory requests.

1 70. A directory services system as in claim 68 wherein said
2 response component sends information to destinations revealed by the
3 results of the classification process without revealing at least some
4 information concerning said destinations to the information source.

1 71. A microsegmented merchandising technique including
2 the steps of performing classification based at least in part on usage
3 data and/or lifestyle profiles, and distributing offers for products
4 and/or services based at least in part on the classification.

1 72. A microsegmented merchandising technique as in claim
2 71 wherein the performing step includes defining at least one class
3 hierarchy based at least in part on rights management information.

1 73. A microsegmented merchandising technique as in claim
2 71 further including the step of combining plural offers for different
3 products and/or services based at least in part on said classification.

001020-09260160

1 80. A currency/debt trading system including:
2 a currency or debt trading computer; and
3 an arrangement coupled to said computer that performs at least
4 one classification process based at least in part on rights management
5 information.

1 81. A currency/debt trading system as in claim 80 wherein
2 said arrangement includes means for defining at least one class
3 hierarchy based at least in part on rights management information.

1 82. A currency/debt trading system as in claim 80 wherein
2 the arrangement uses classification to maximize return or minimize
3 loss.

1 83. A financial institution selection system including a
2 computer that classifies financial institutions based at least in part on
3 rights management information.

1 84. A software distribution method including the steps of
2 generating class information based at least in part on rights
3 management information, and selecting software to be distributed
4 and/or recipients who are to receive distributed software based at least
5 in part on class information.

1 85. A software distribution method as in claim 84 wherein
2 said generating step includes defining a class hierarchy using at least
3 some rights management information.

1 103. An automatic governmental and/or societal rights
2 supporting system as in claim 101 wherein the matching and/or
3 classification computing element includes means for classifying
4 entities based on at least one of the following:

5 tax status;
6 right to receive certain information;
7 right to engage in certain transactions; and
8 jurisdiction.

1 104. An automatic taxing authority computer including
2 means for issuing tax class control sets based at least in part on tax-
3 based class definitions, and means for using said tax control sets at
4 least in part to collect and/or enforce taxation.

1 105. A method for adaptively presenting information
2 differently to different participants, including associating said
3 participants with classes, and controlling presentation based at least in
4 part on class-based control sets included within the information.

1 106. A method as in claim 105 further including using said
2 class-based control sets to match participants with different portions
3 of said information.

1 107. A method as in claim 105 further including using said
2 class-based control sets to change the form in which information is
3 presented based at least in part on said classes.

1 108. A method as in claim 105 further including the step of
2 operating said class-based control sets based at least in part on
3 metadata associated with different portions of said information.

1 109. A method as in claim 105 further including selecting
2 said class-based control sets between different images for
3 presentation based at least in part on one or more classes associated
4 with a participant.

1 110. A method as in claim 105 further including using said
2 class-based control sets to emphasize certain portions of said
3 information over other portions in said presentation based at least in
4 part on one or more classes associated with a participant.

1 111. A method as in claim 105 further including using at
2 least one computer having a protected processing environment.

1 112. A method for adaptively presenting information
2 differently to different participants including:
3 classifying the different participants based on capability; and
4 using class-based control sets associated with said information
5 to change the difficulty of the presentation based at least in part on
6 said classification.

1 113. A method as in claim 112 wherein the different
2 recipients are classified based on grade level.

091036-0900

4 information and/or class-based rights management information based
5 at least in part on classification metadata.

1 126. An information classification method as in claim 125
2 further including basing said other plural classification hierarchies at
3 least in part on object metadata.

1 127. An information classification method as in claim 125
2 further including specifying said classification object metadata
3 specified classifications based on at least one of location, name,
4 prices, permissions, ISSN, title, author, publisher and/or date.

1 128. An information classification method as in claim 125
2 further including generating said class-based rights management
3 information by classifying classes.

1 129. An electronic gambling system including a computer
2 that matches gamblers with plural gambling providers based at least
3 in part through classifying the gambling providers using rights
4 management information.

1 130. An electronic gambling system as in claim 129 wherein
2 the computer includes means for classifying the gamblers based at
3 least in part on rights management information.

1 131. An electronic gambling system as in claim 129 wherein
2 the computer includes at least one protected processing environment.

ABSTRACT OF THE DISCLOSURE

Rights management information is used at least in part in a matching, narrowcasting, classifying and/or selecting process. A matching and classification utility system comprising a kind of Commerce Utility System is used to perform the matching, narrowcasting, classifying and/or selecting. The matching and classification utility system may match, narrowcast, classify and/or select people and/or things, non-limiting examples of which include software objects. The Matching and Classification Utility system may use any pre-existing classification schemes, including at least some rights management information and/or other qualitative and/or parameter data indicating and/or defining classes, classification systems, class hierarchies, category schemes, class assignments, category assignments, and/or class membership. The Matching and Classification Utility may also use at least some rights management information together with any artificial intelligence, expert system, statistical, computational, manual, or any other means to define new classes, class hierarchies, classification systems, category schemes, and/or assign persons, things, and/or groups of persons and/or things to at least one class.

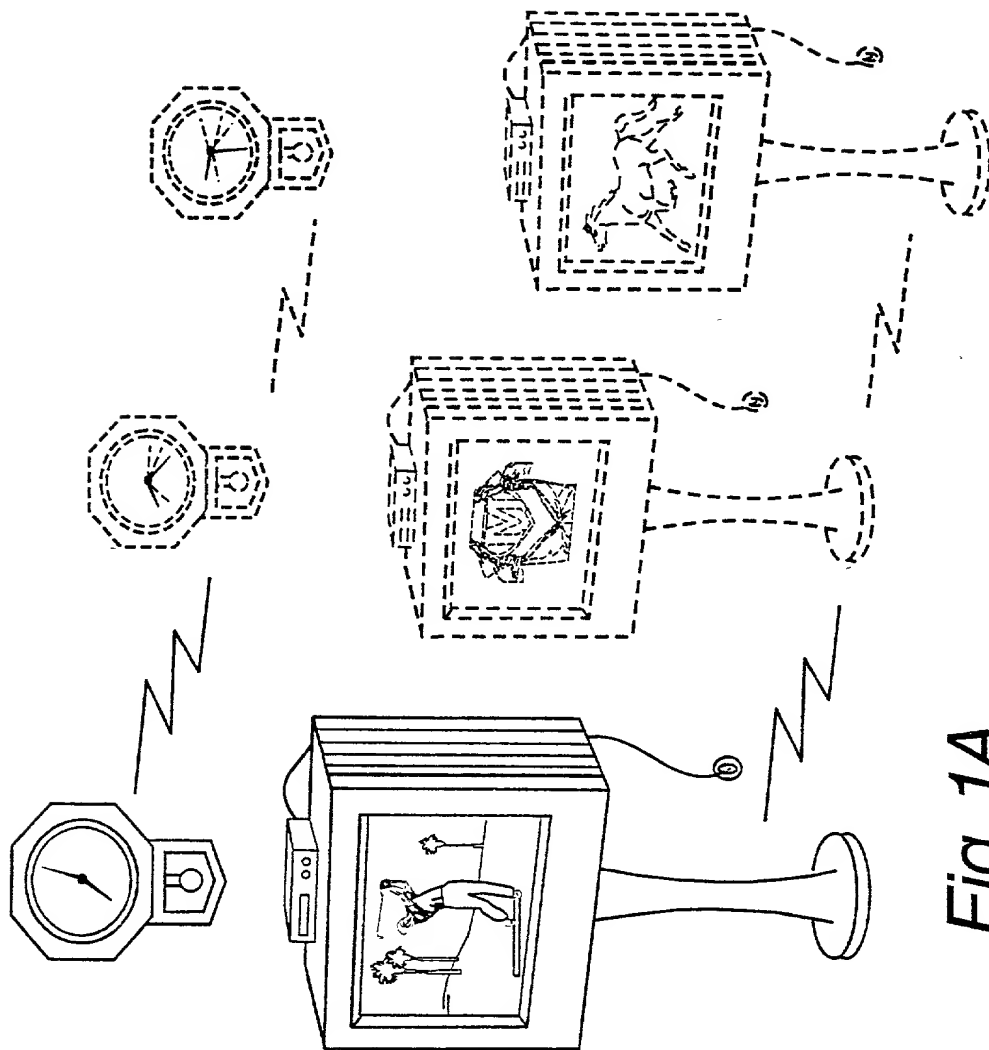
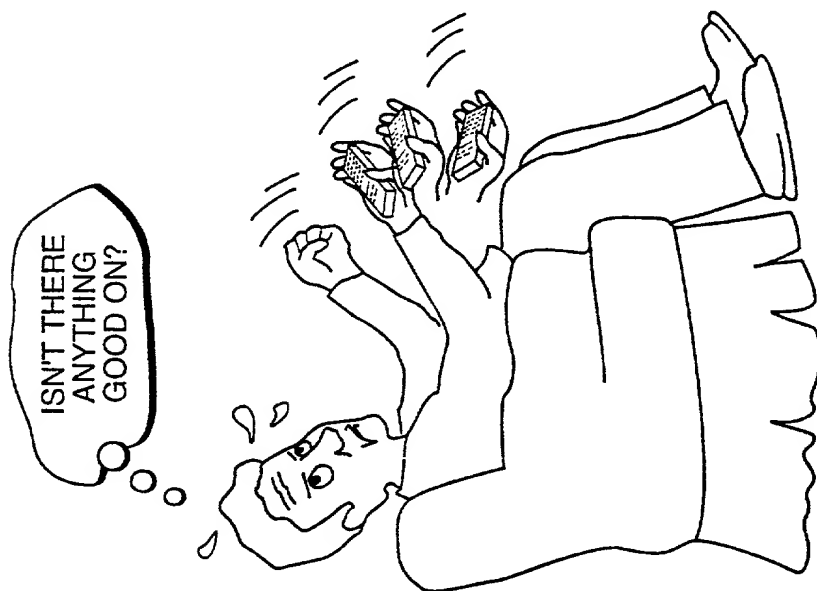
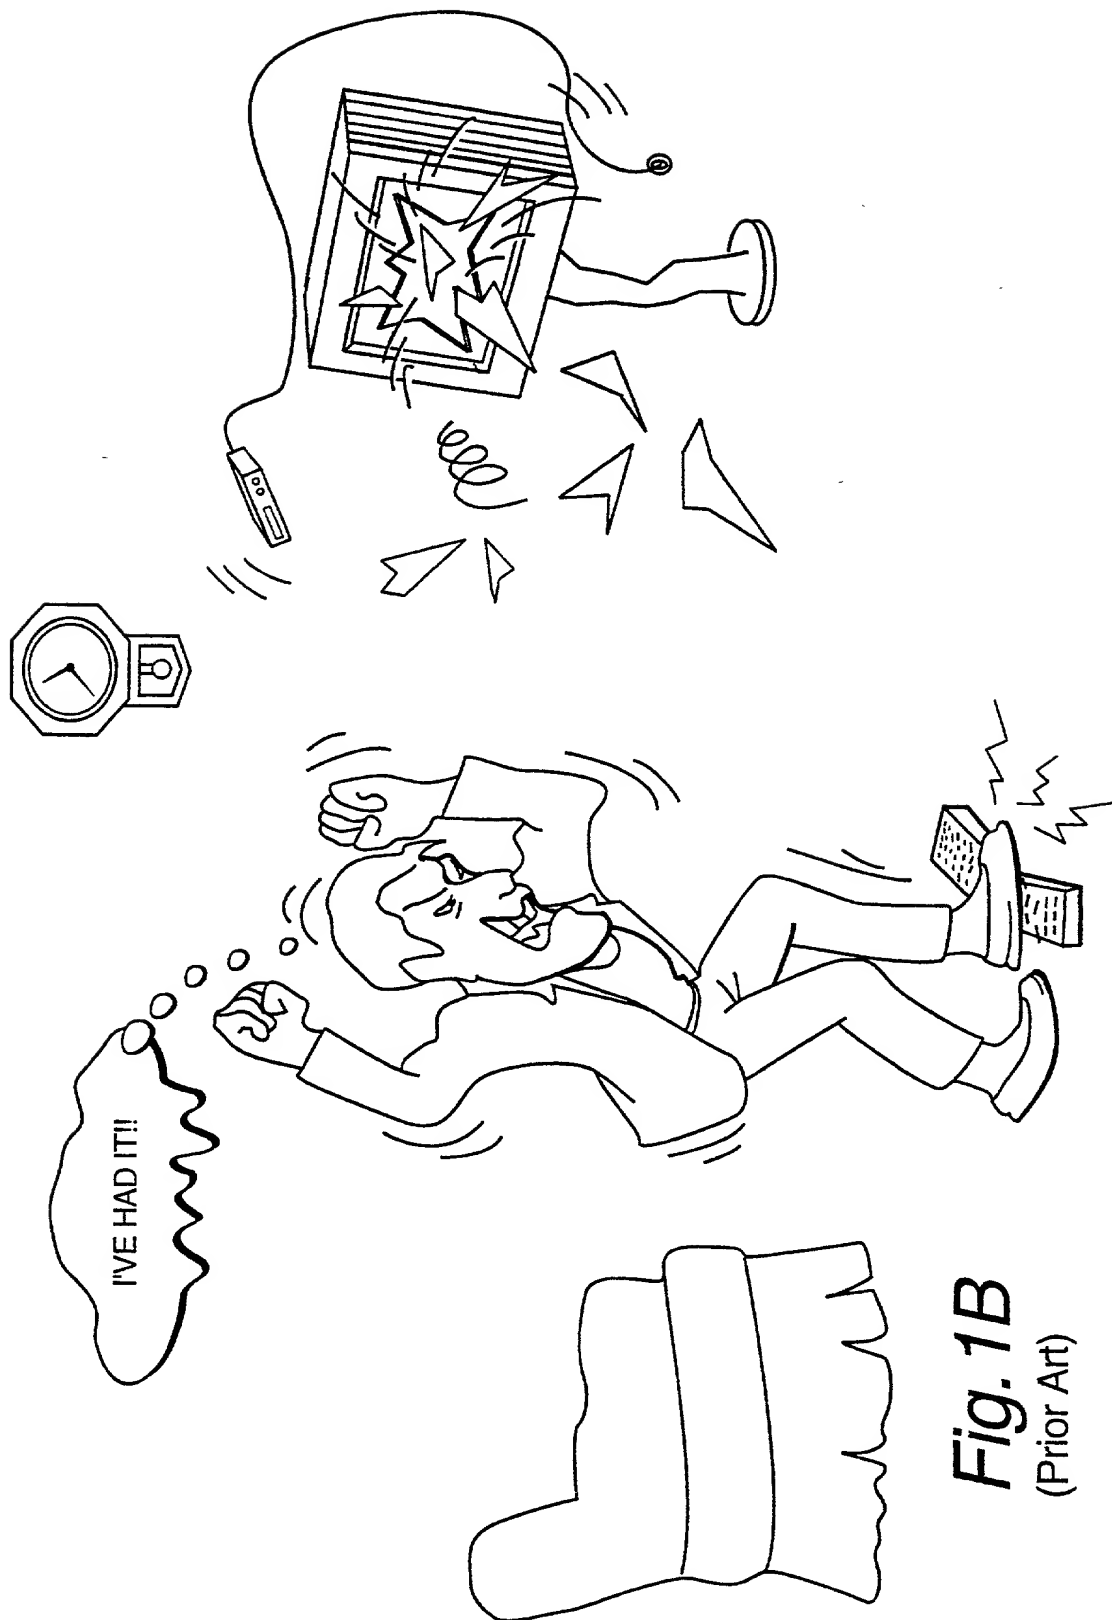


Fig. 1A
(Prior Art)





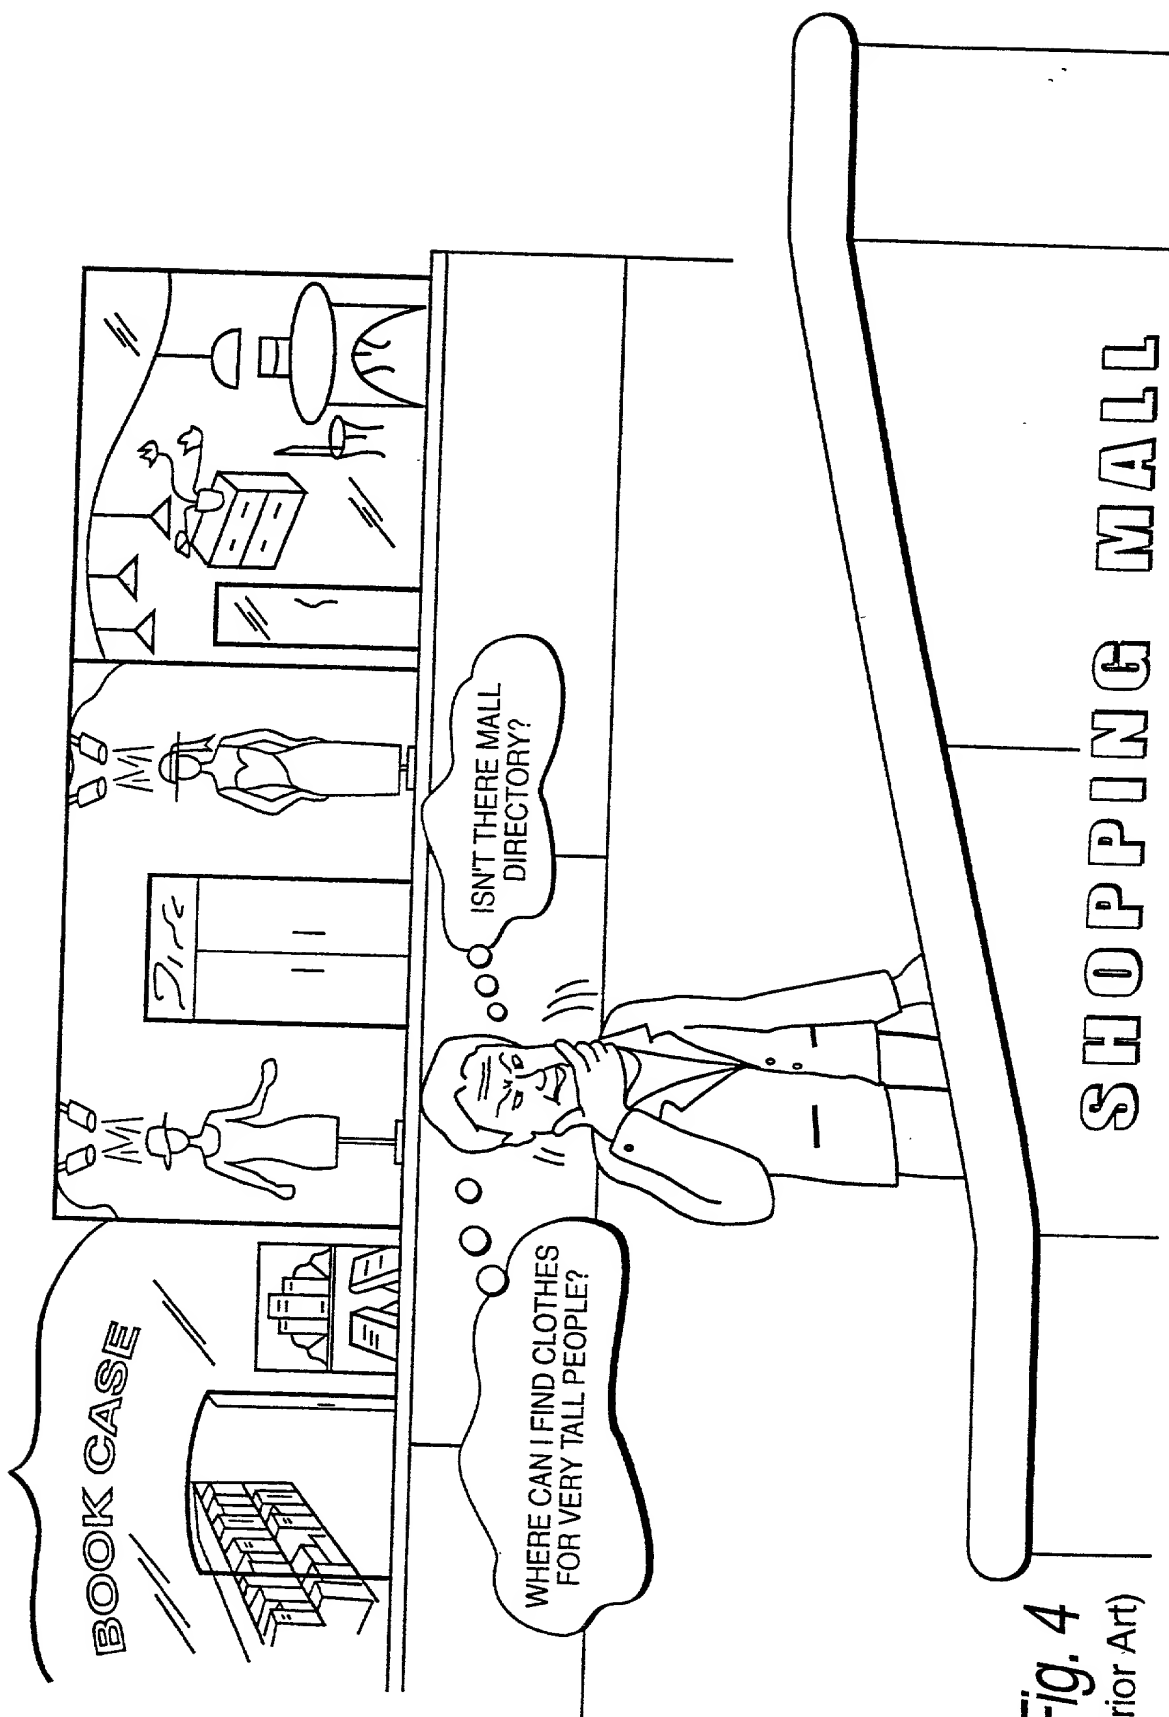


Fig. 4
(Prior Art)

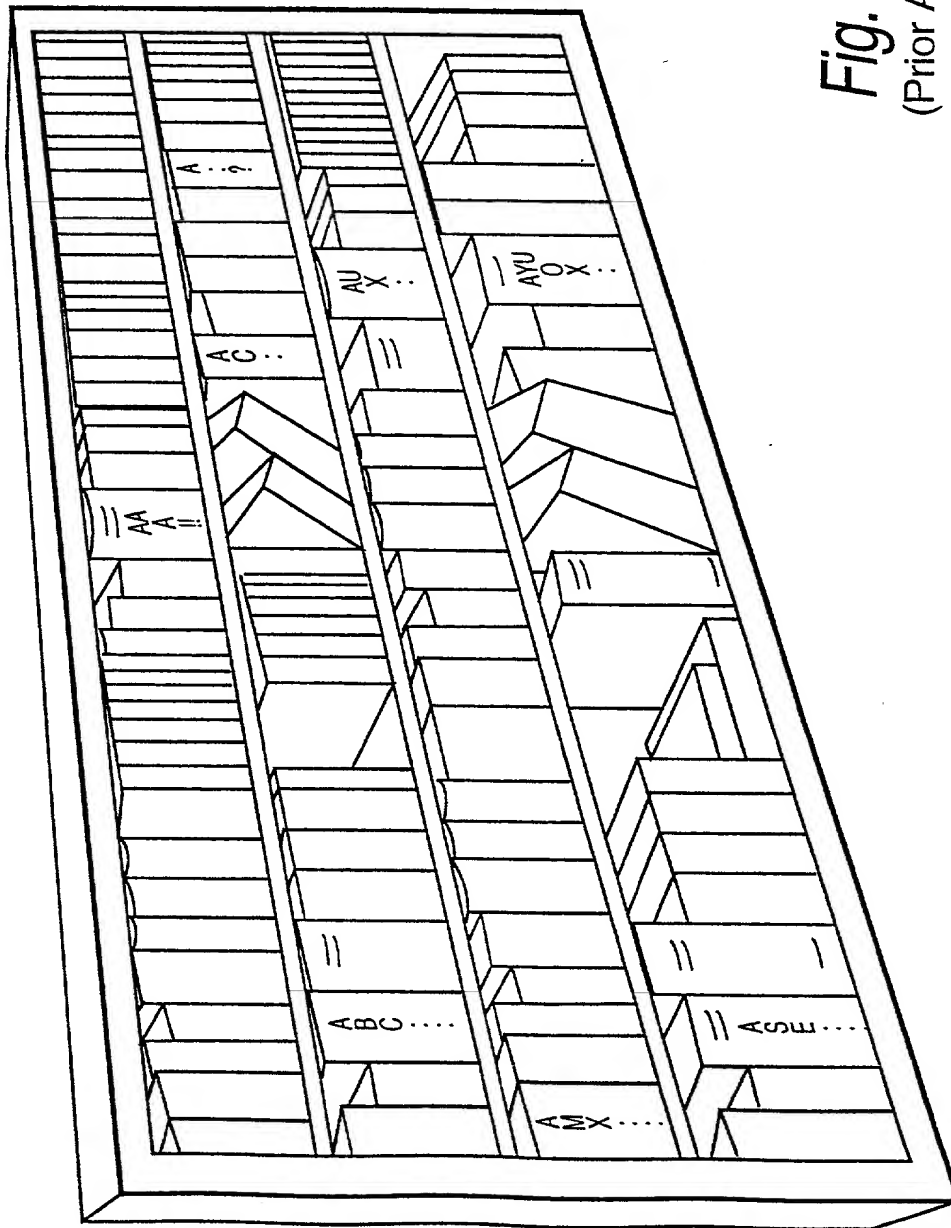
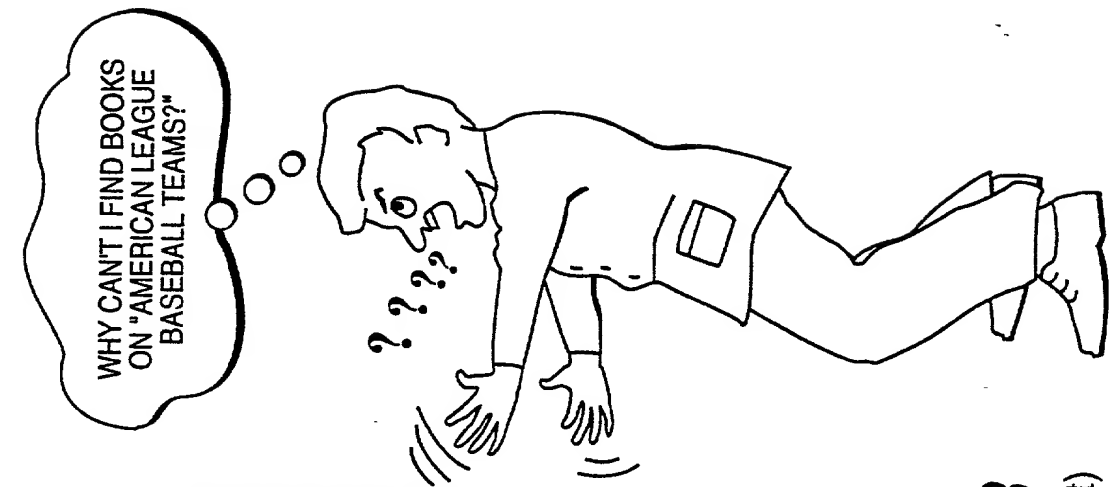


Fig. 3
(Prior Art)

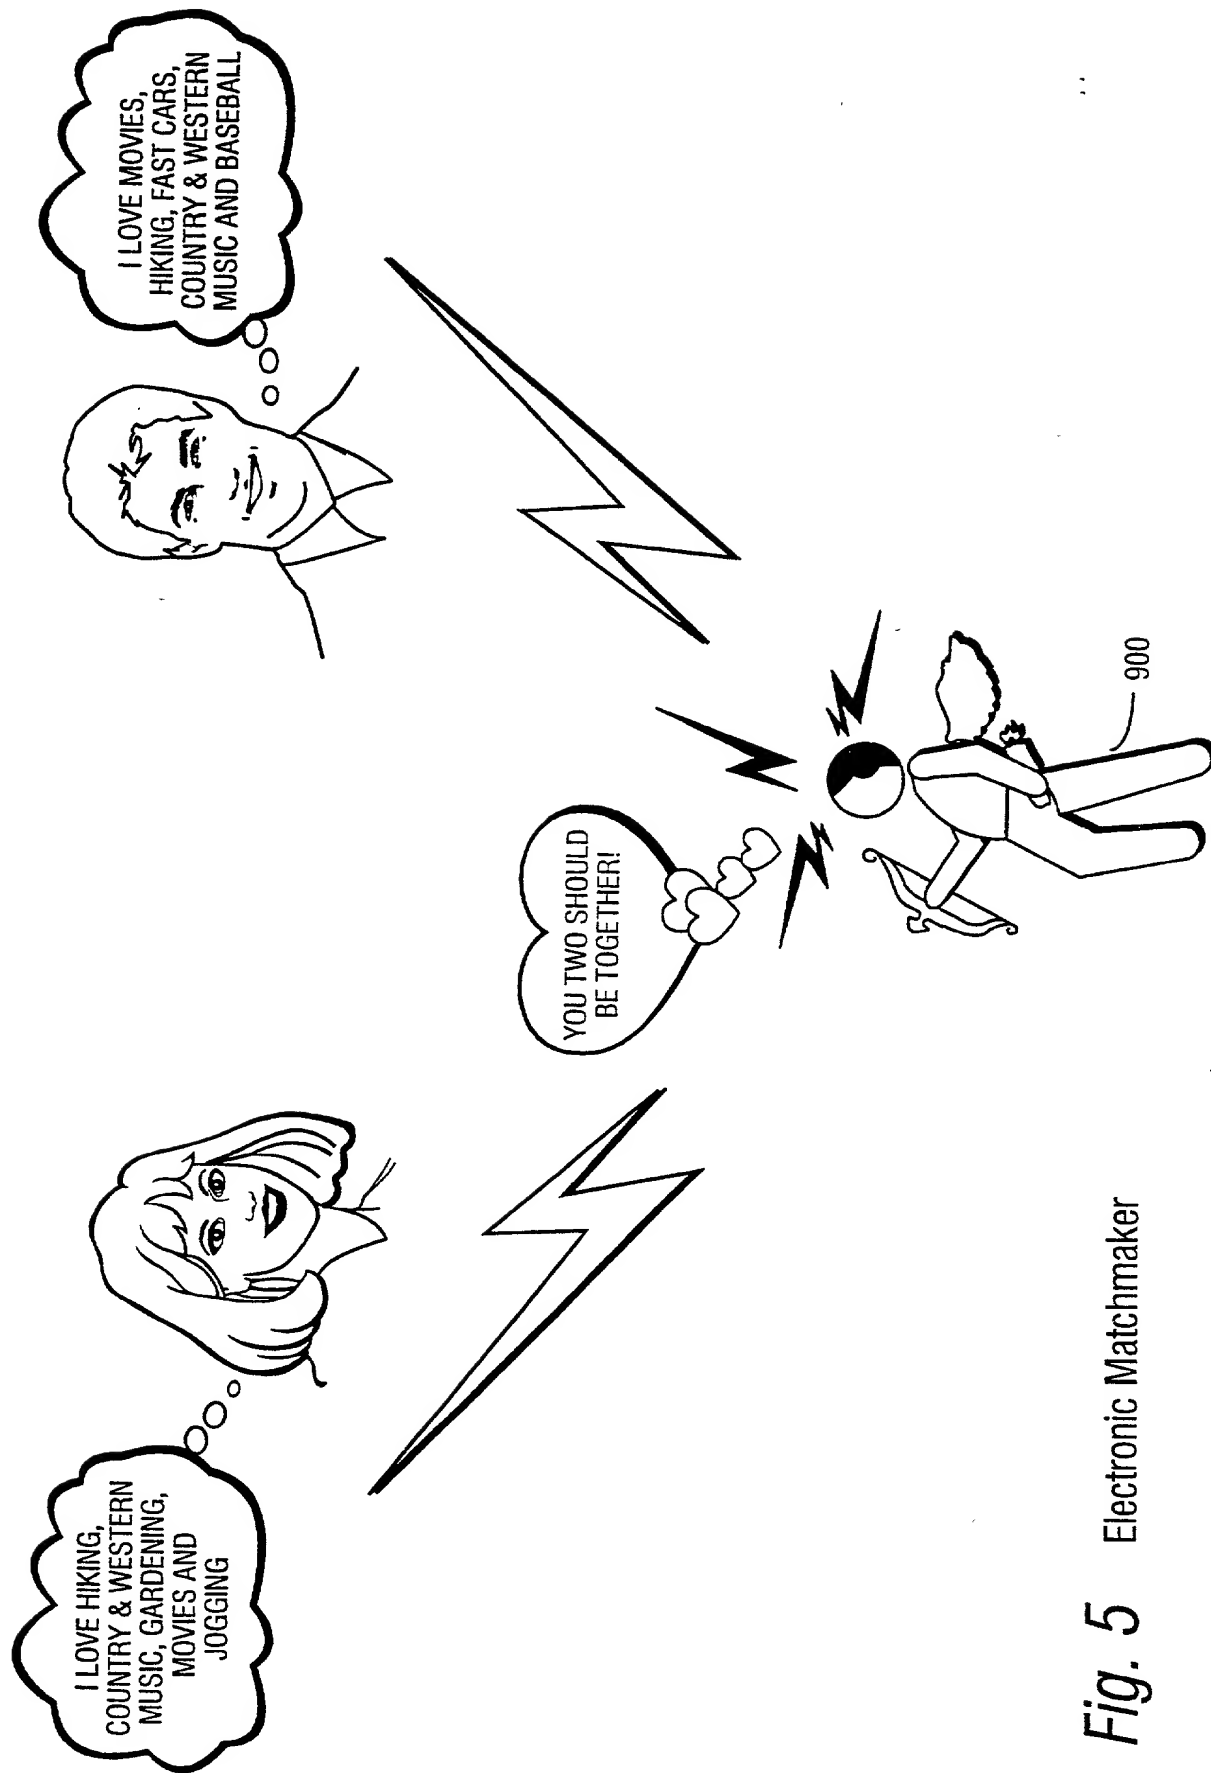


Fig. 5 Electronic Matchmaker

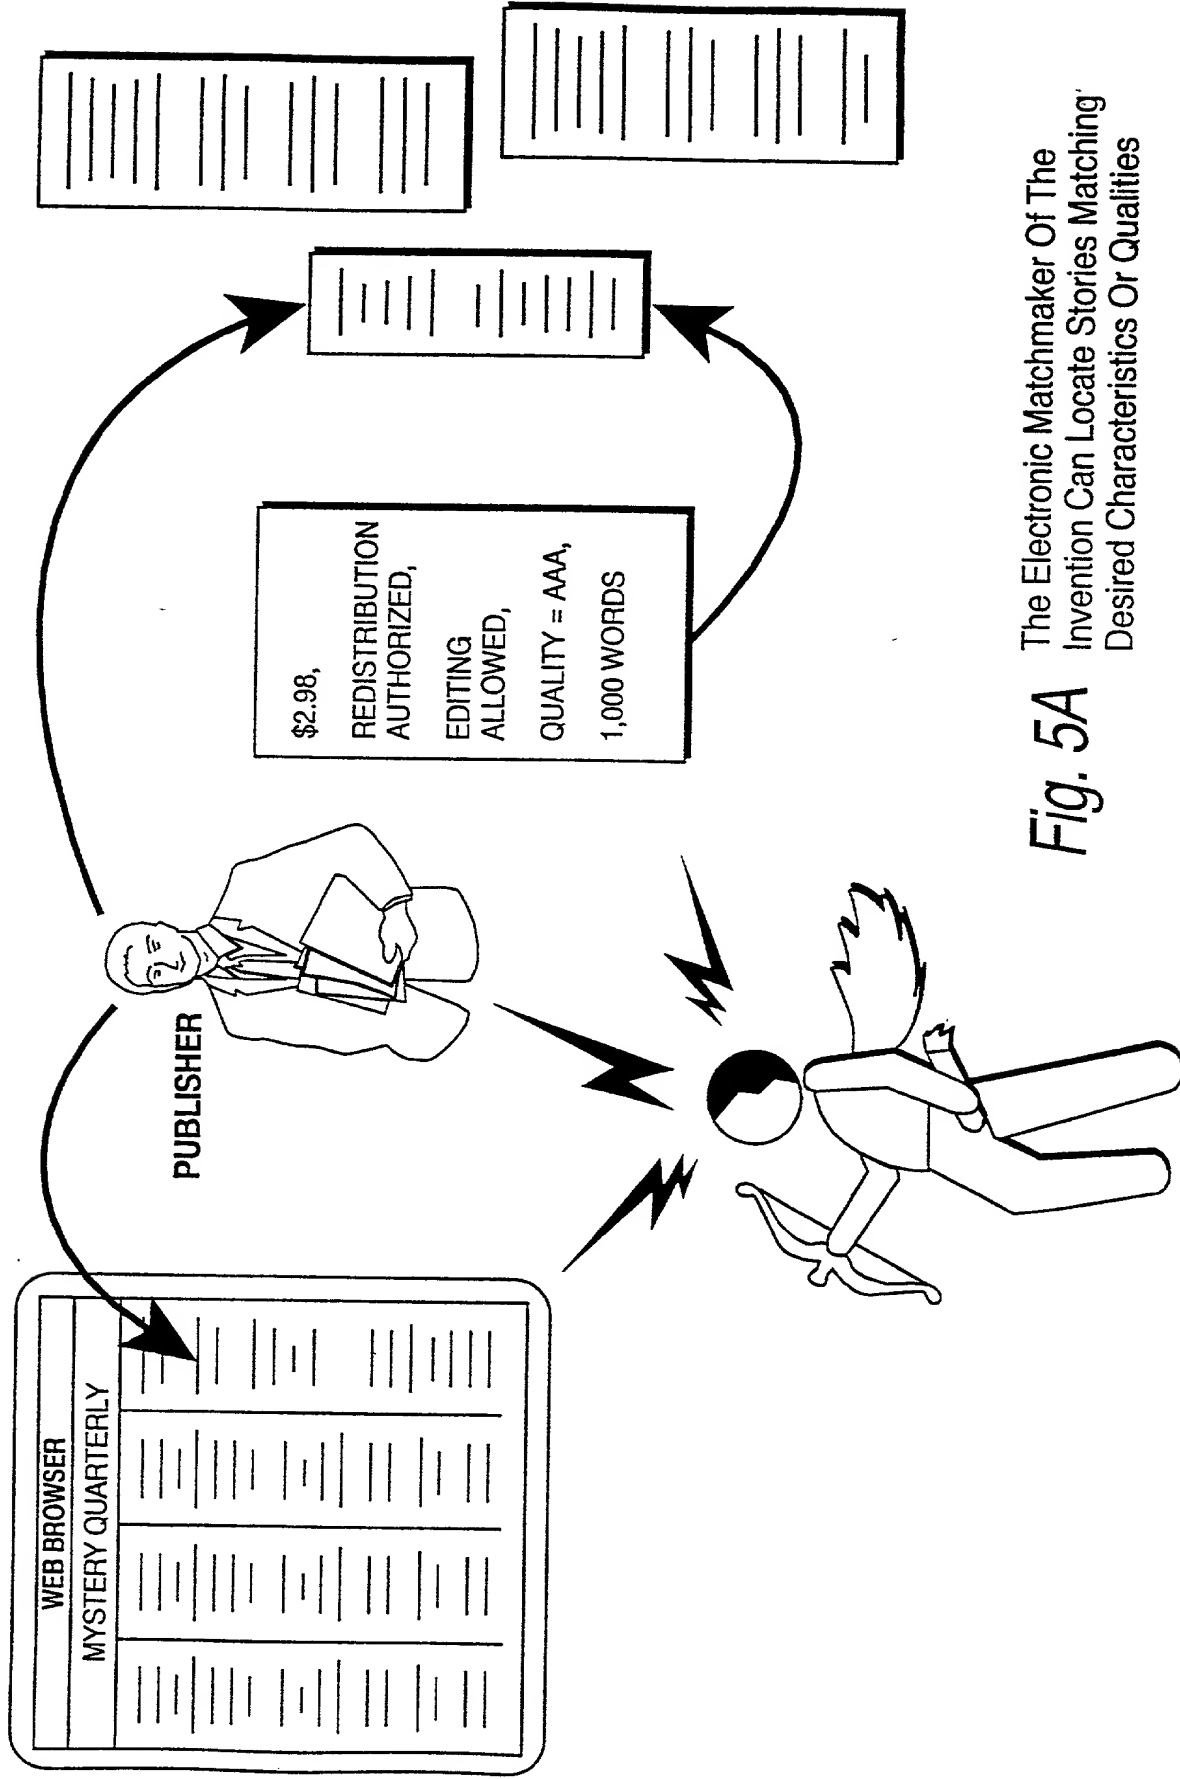



Fig. 5A
The Electronic Matchmaker Of The
Invention Can Locate Stories Matching
Desired Characteristics Or Qualities

Fig. 5B

The Electronic Matchmaker Can Locate
Best Deals For Physical Goods

Fig. 5B
The Electronic Matchmaker Can Locate
Best Deals For Physical Goods





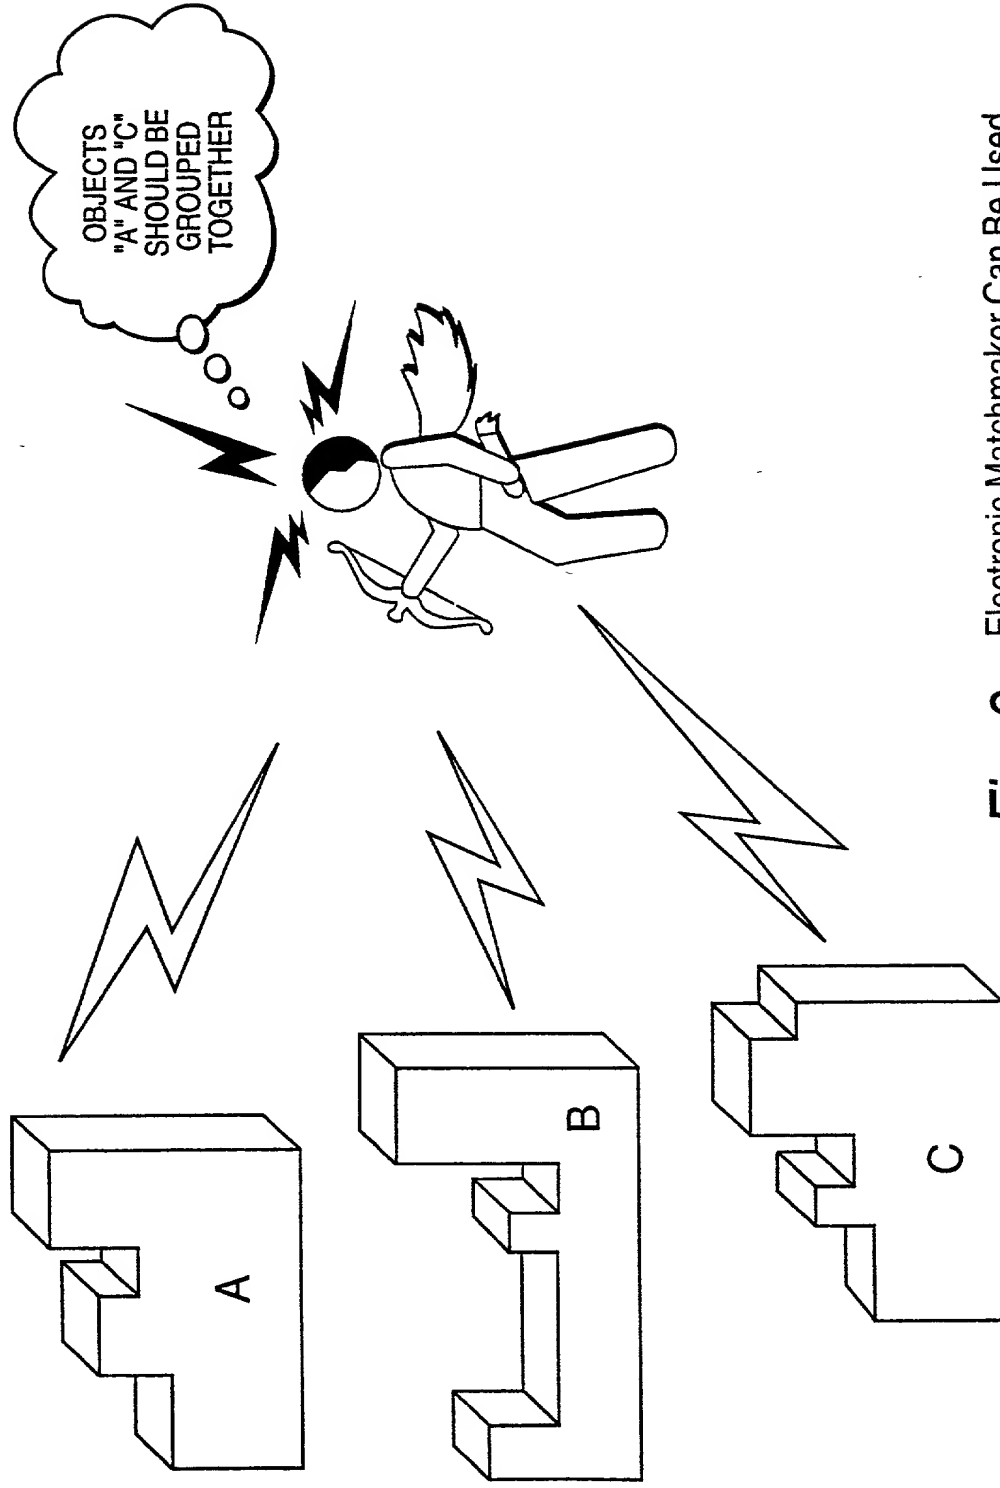


Fig. 8 Electronic Matchmaker Can Be Used For Matching Any Kinds of Things

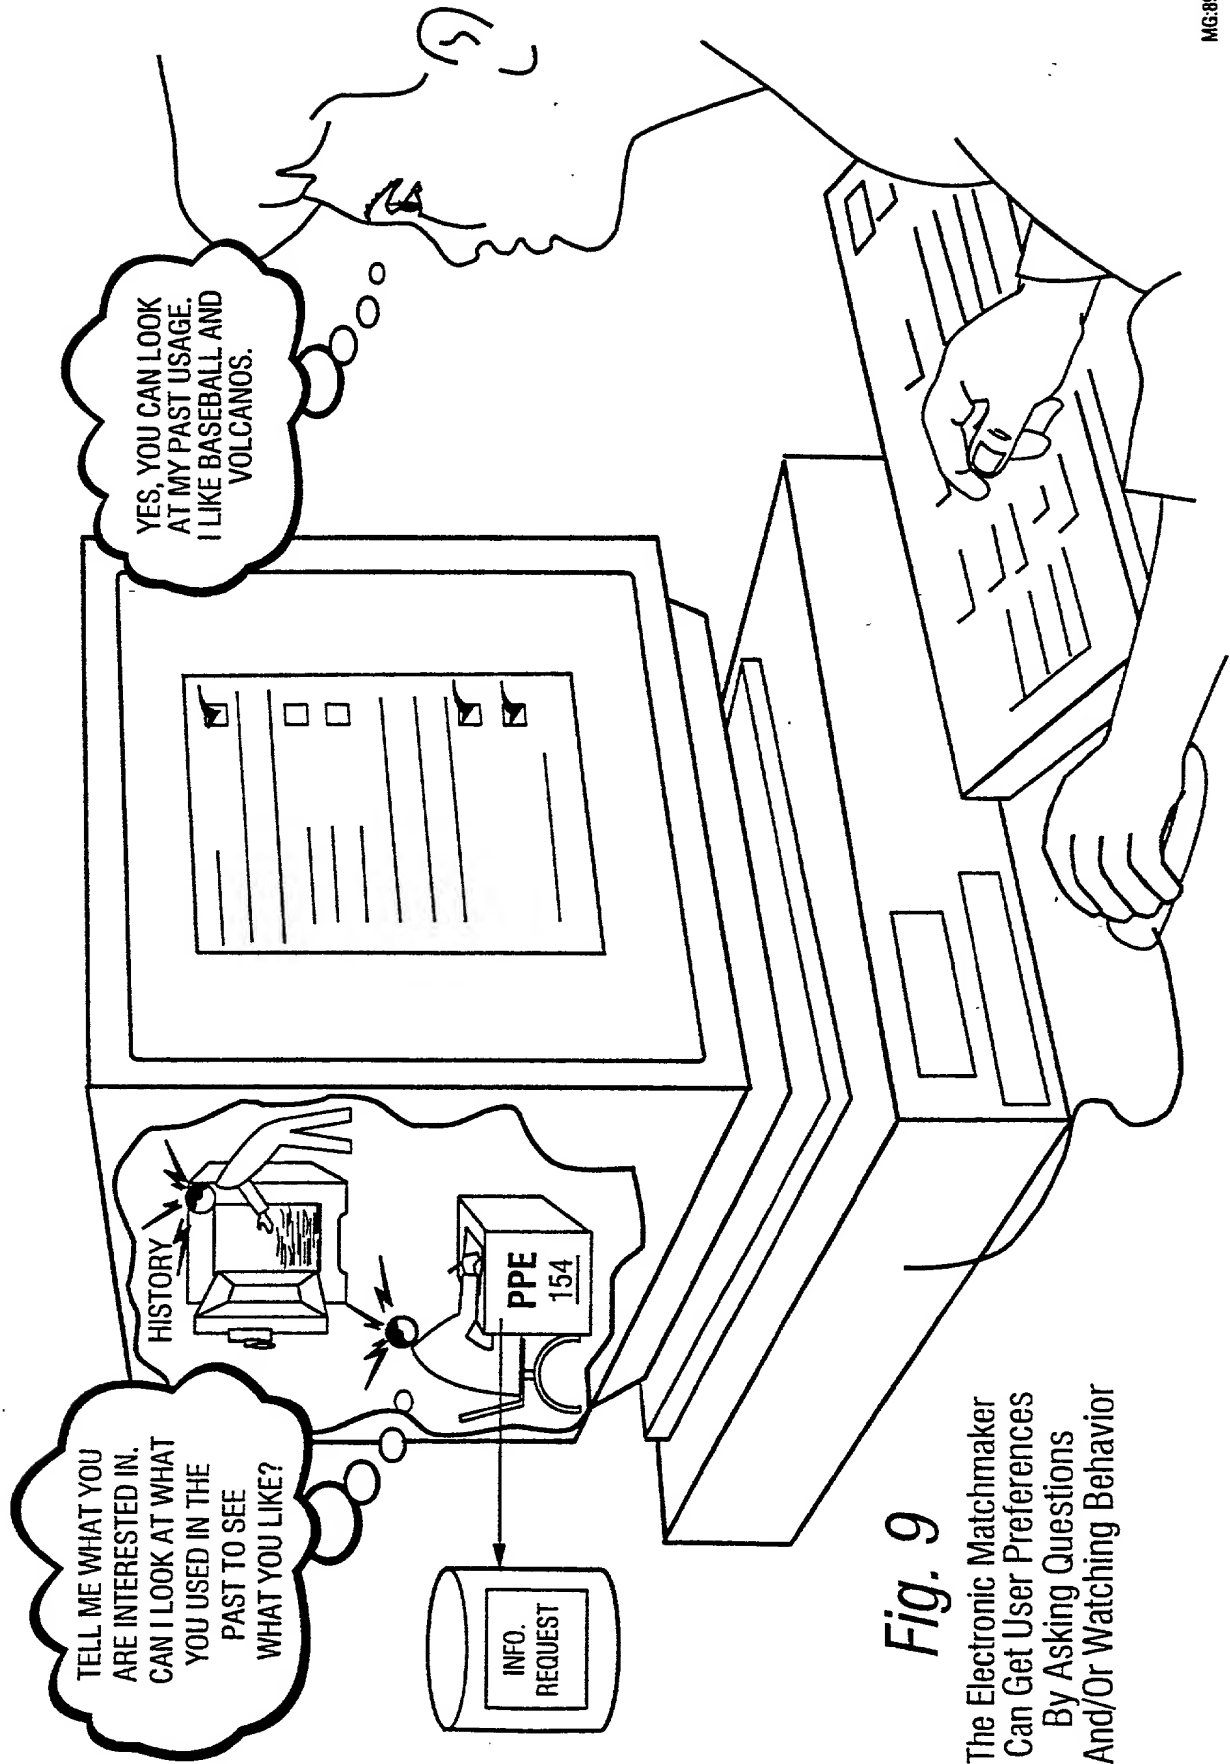


Fig. 9
The Electronic Matchmaker
Can Get User Preferences
By Asking Questions
And/Or Watching Behavior

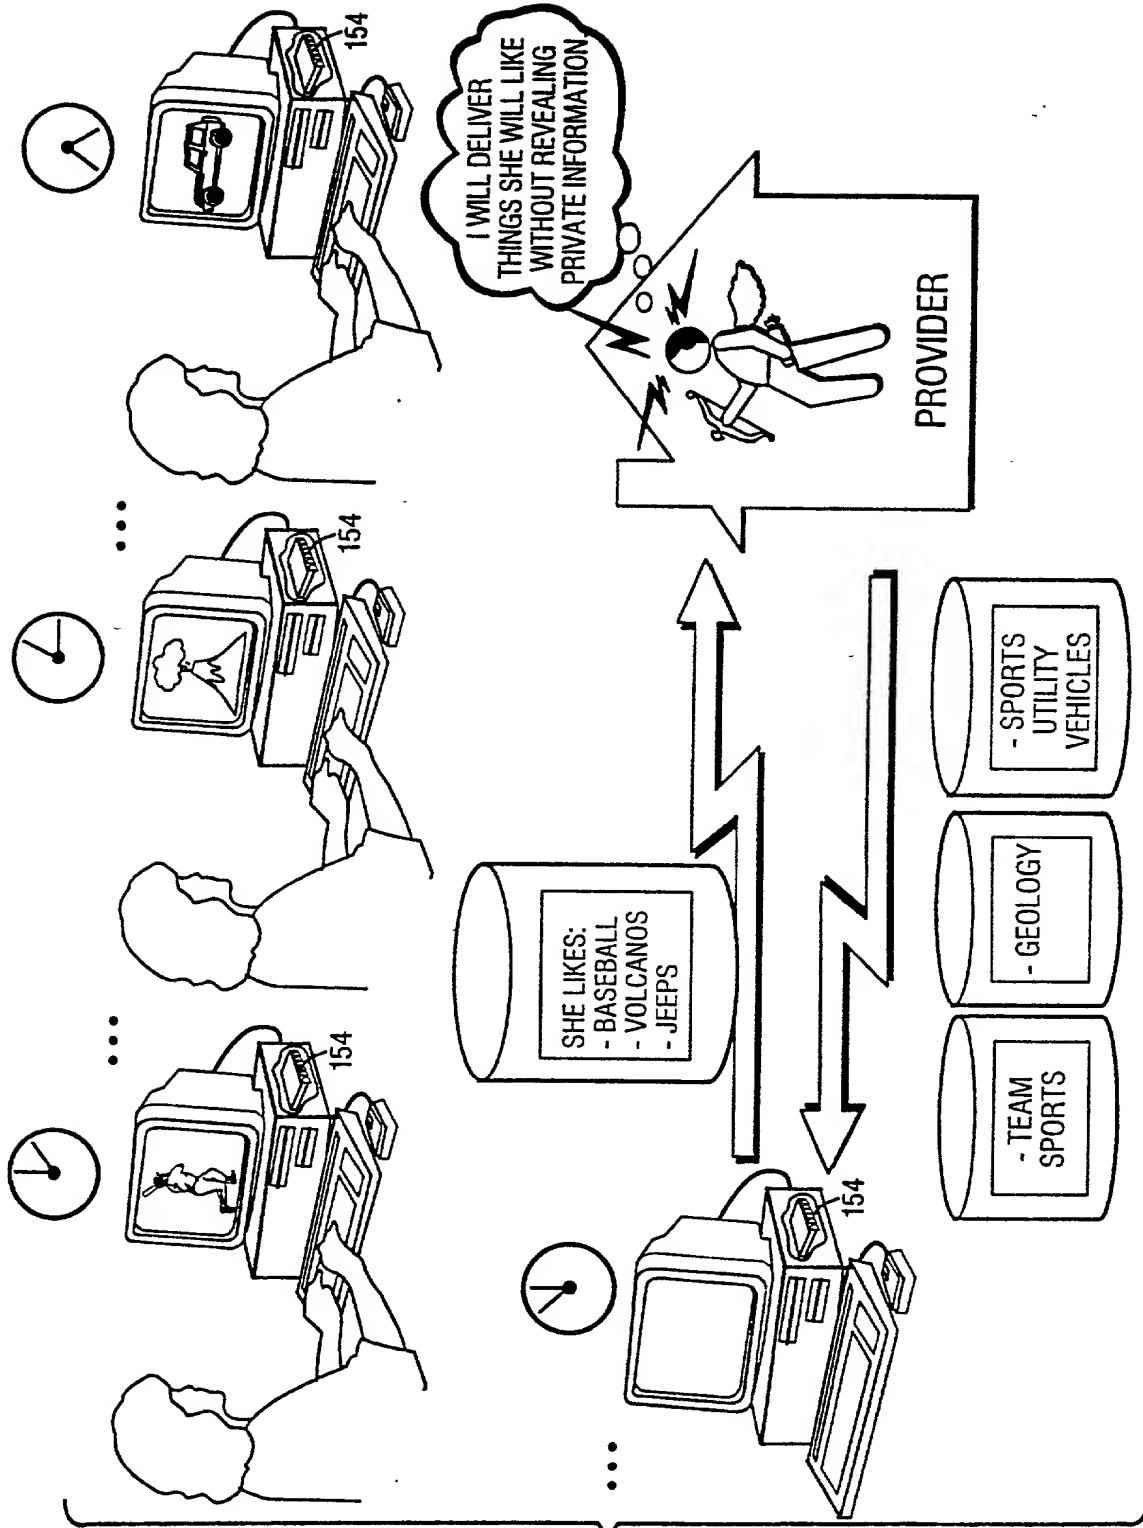
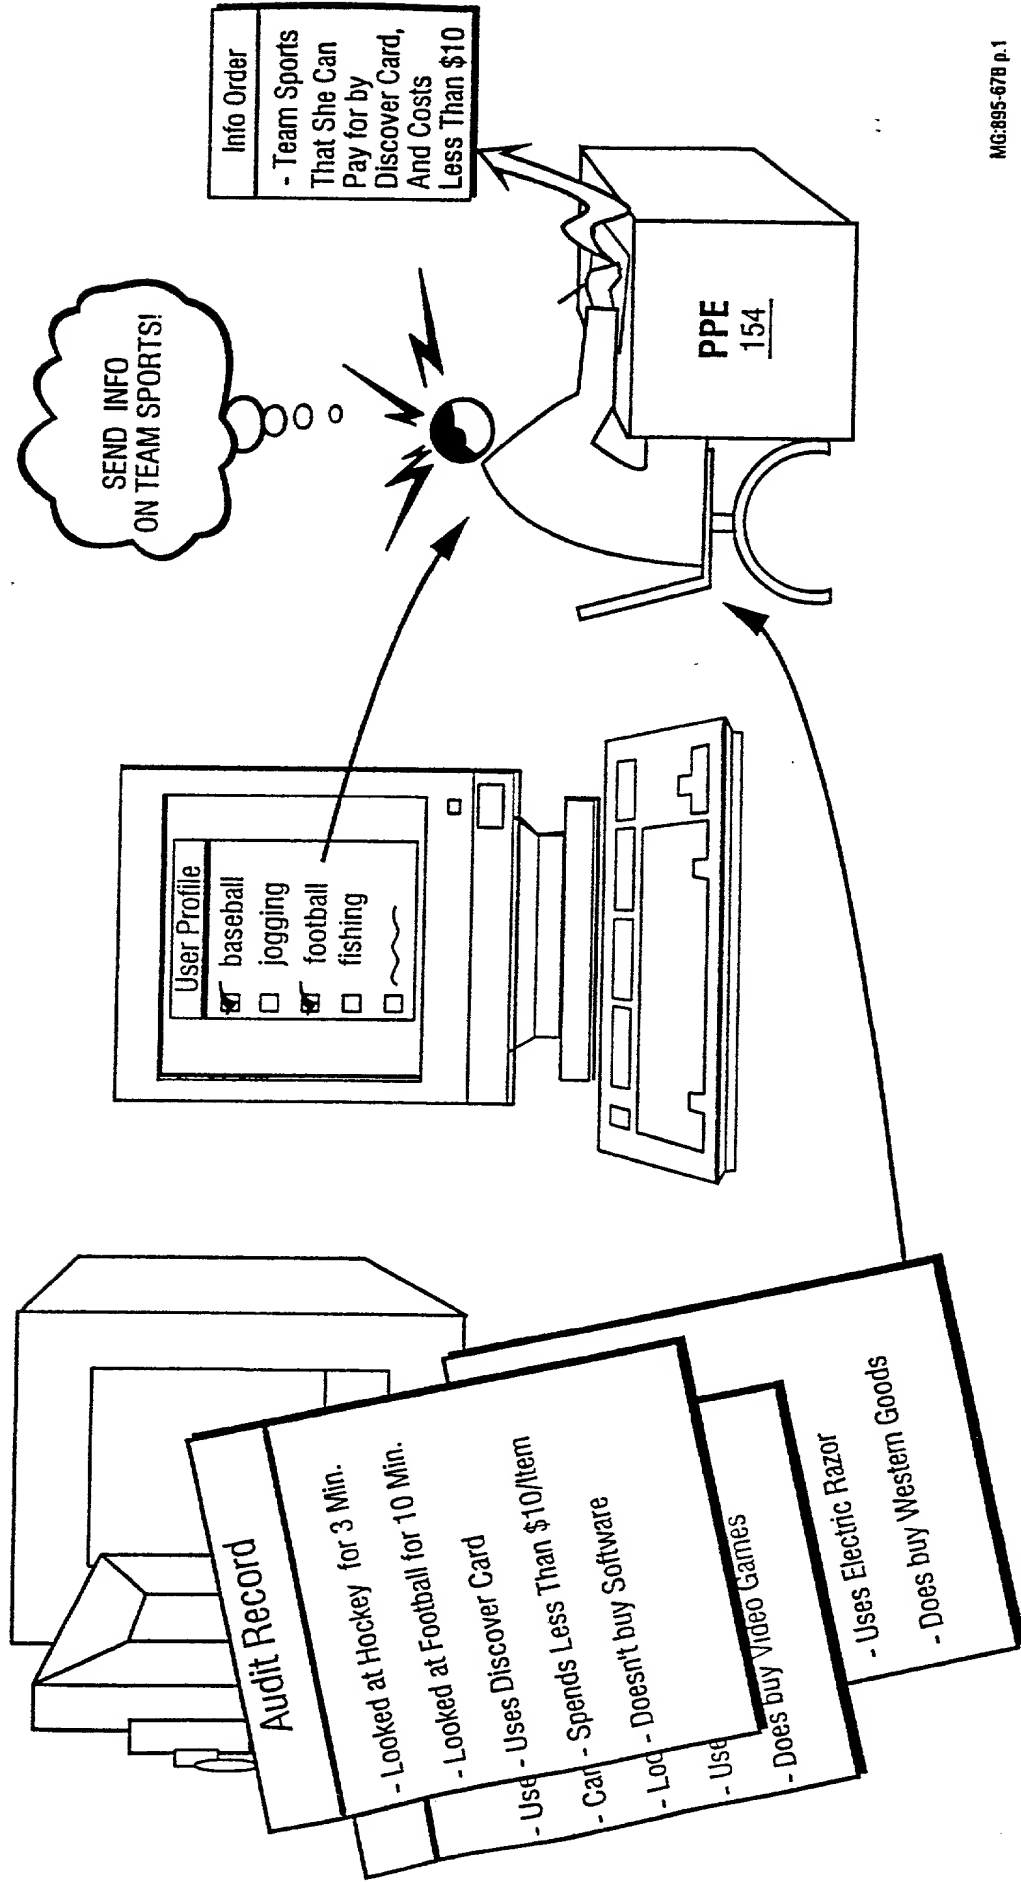


Fig. 10
Example Electronic
Matchmaking Process

Fig. 11

Example User Rights Management Information
By Electronic Matchmaker



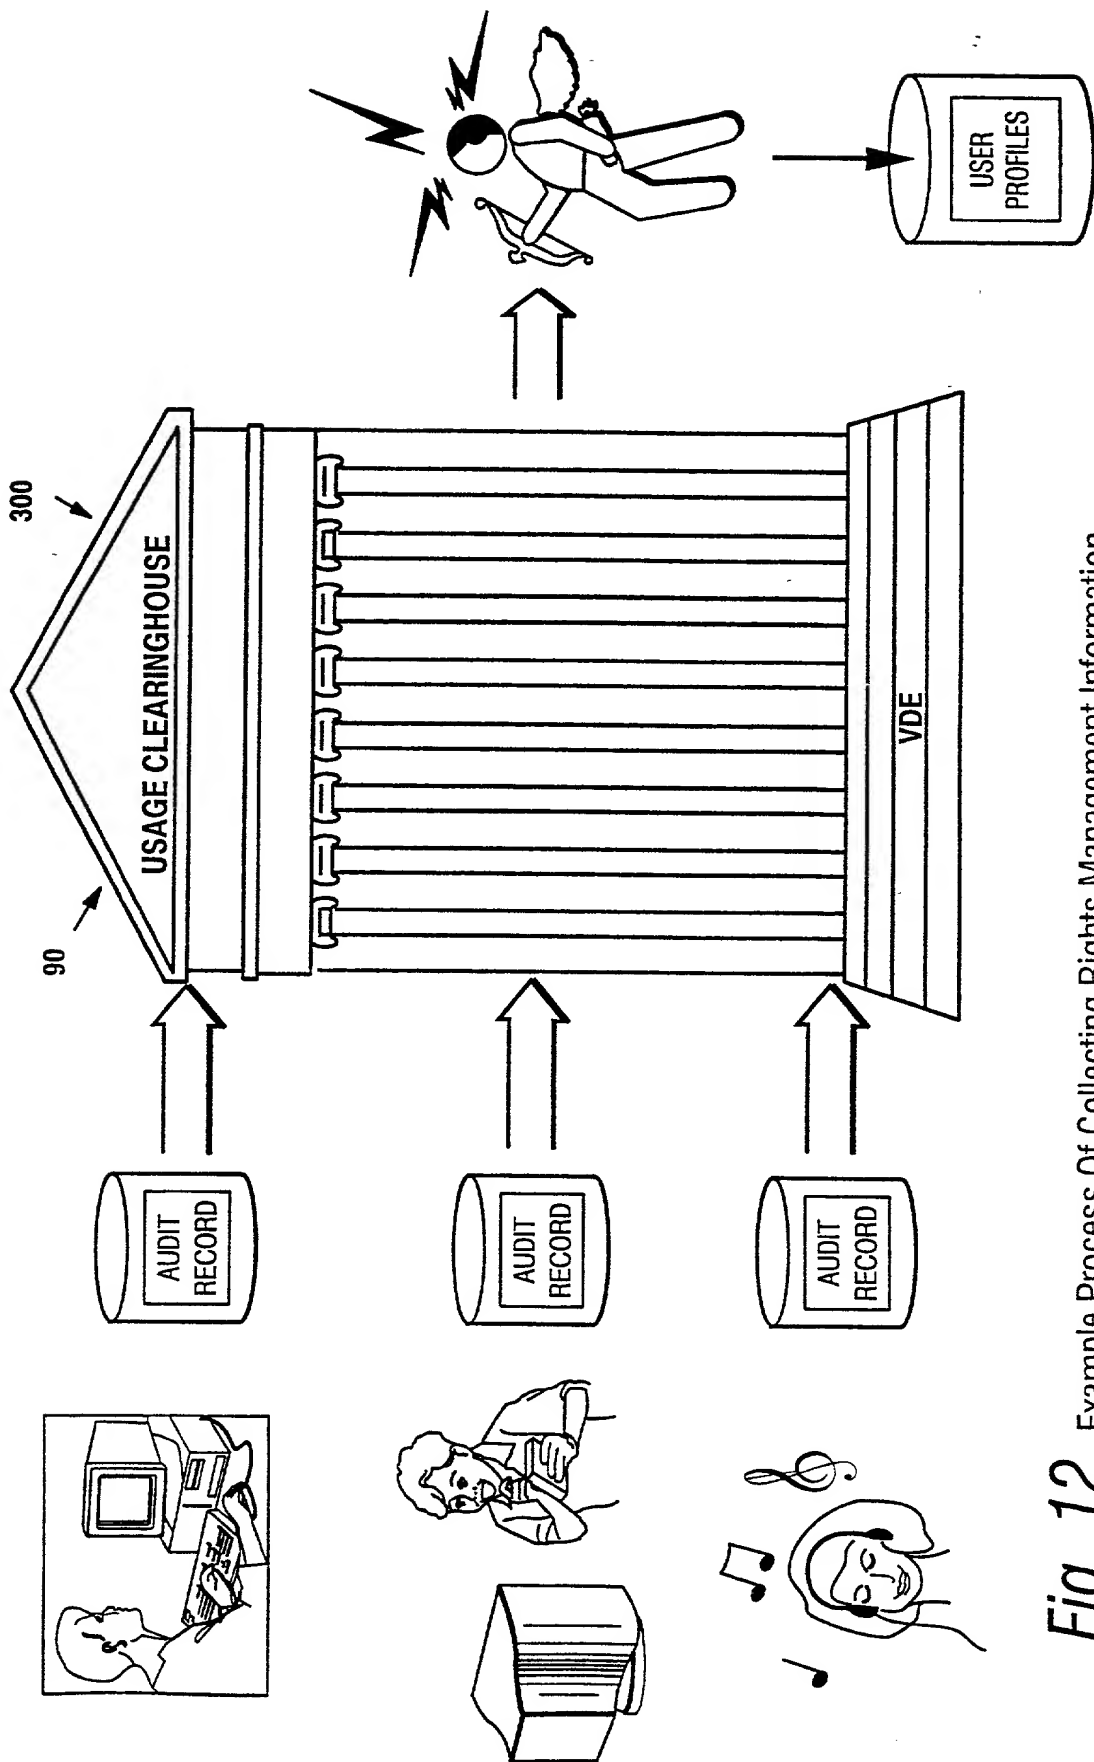


Fig. 12 Example Process Of Collecting Rights Management Information

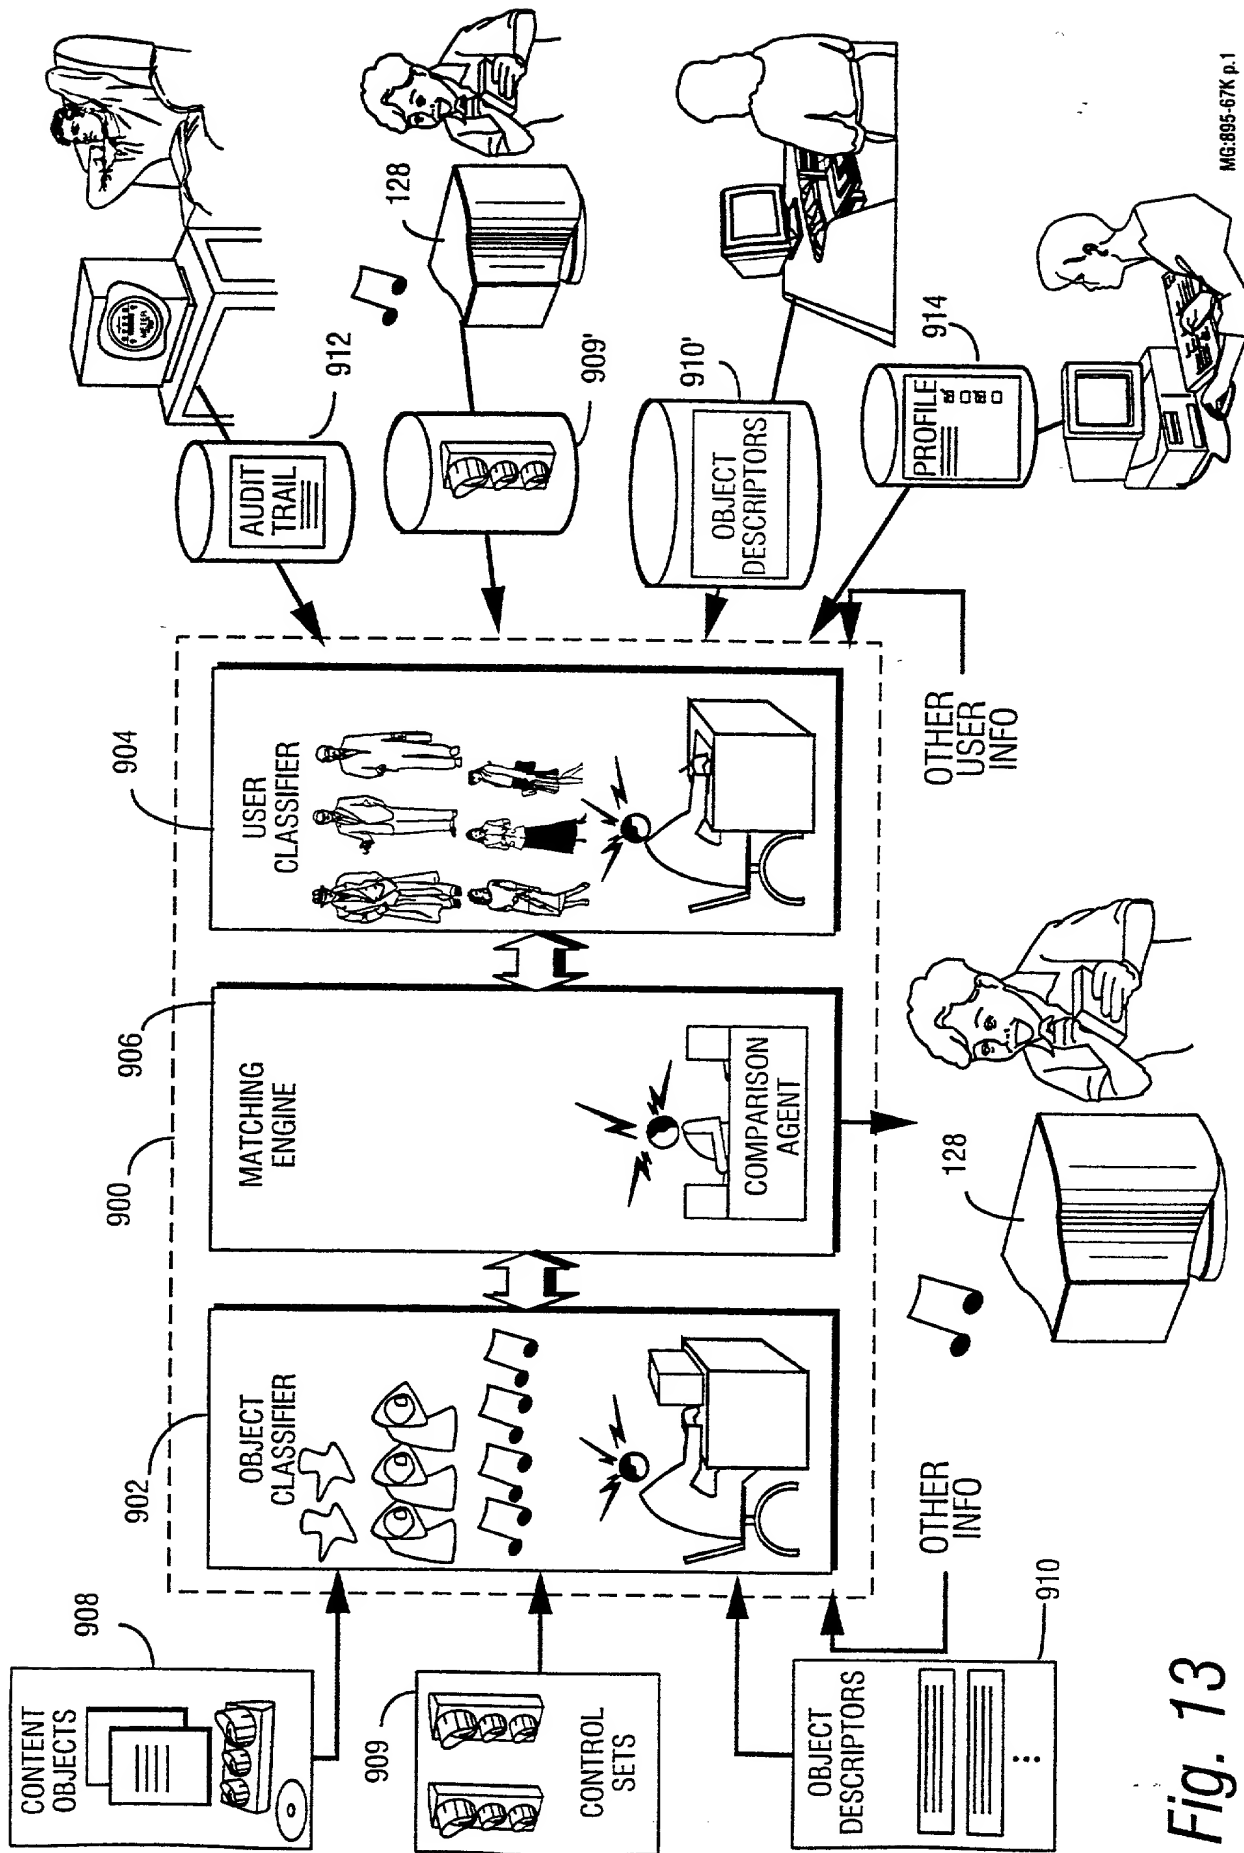
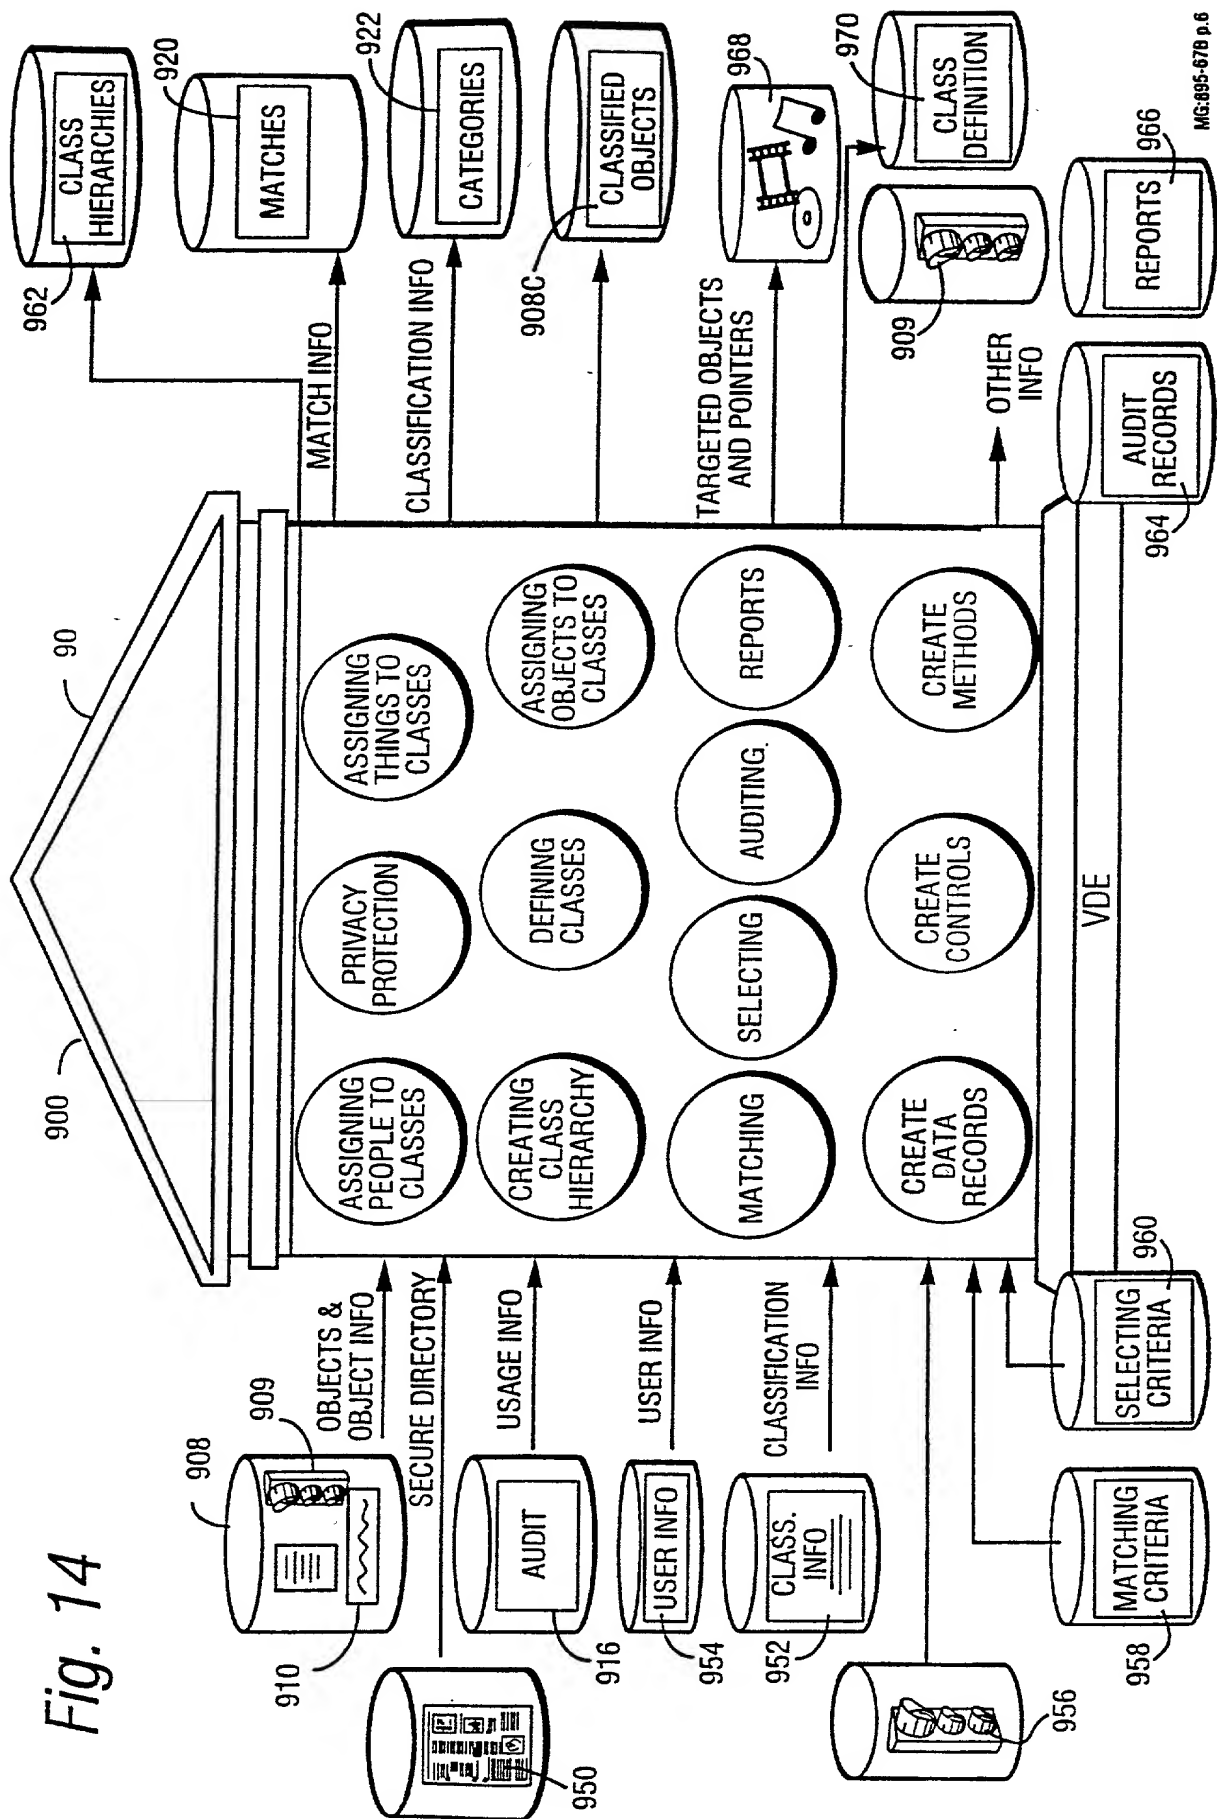


Fig. 13

Fig. 14




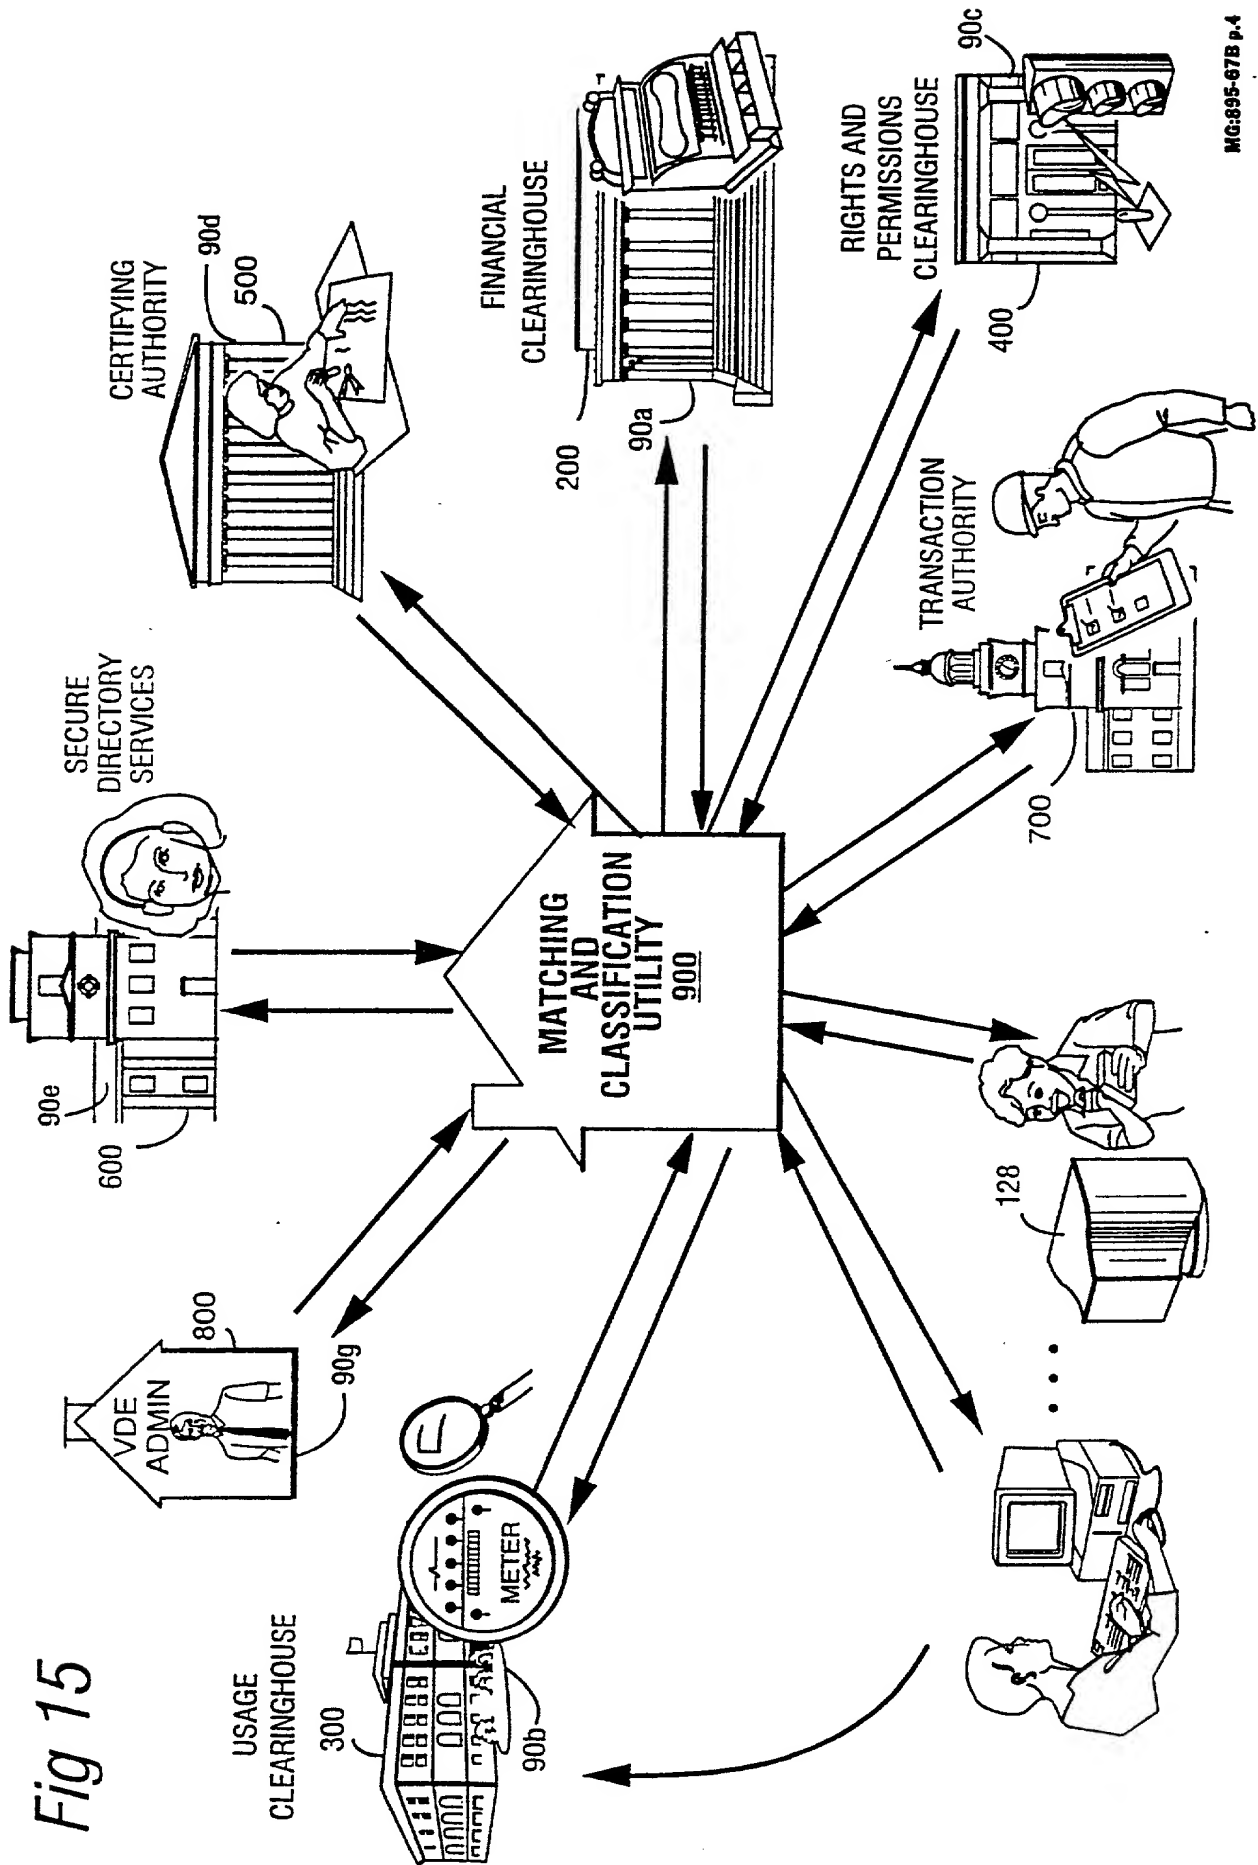


Fig. 15A

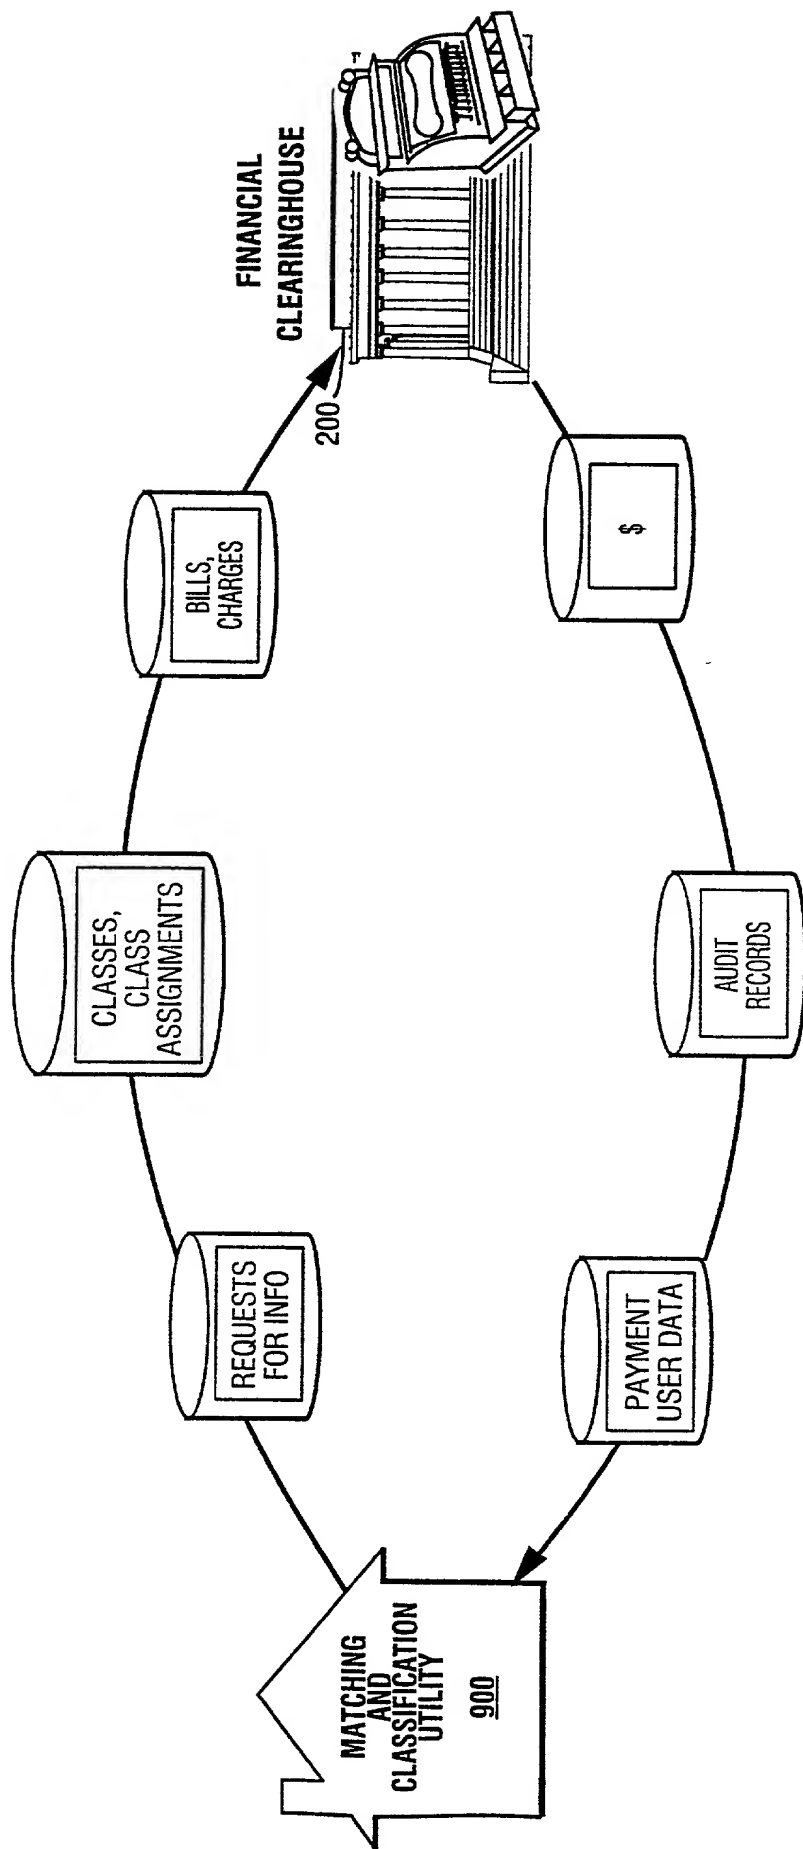

USAGE

RINGHOUSE

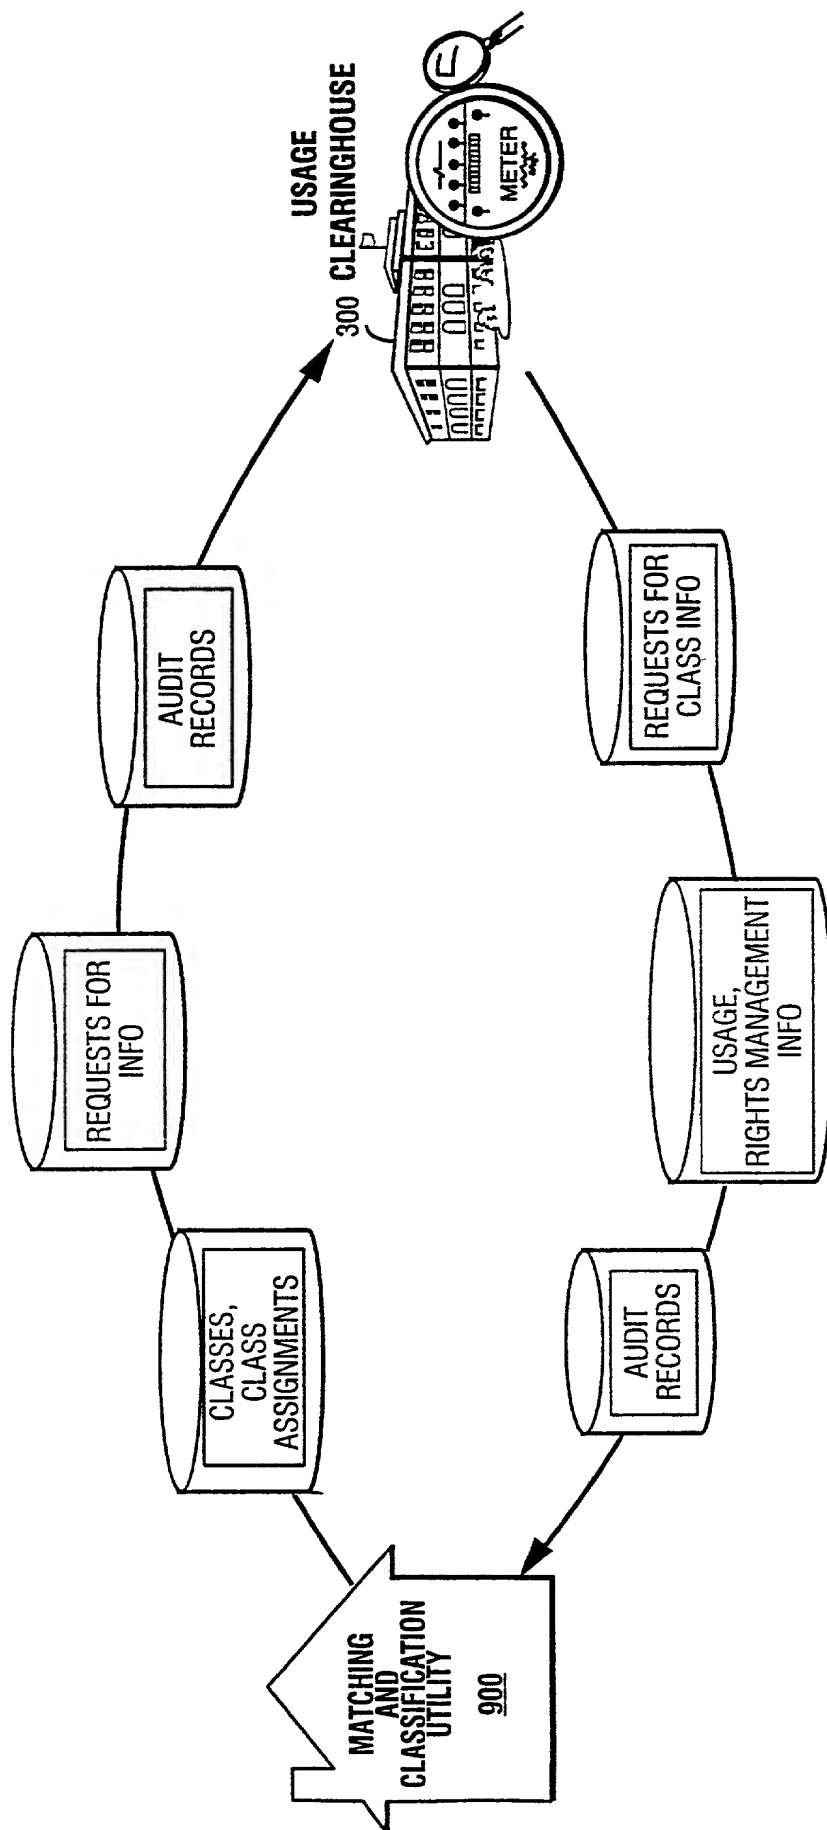


Fig. 15C

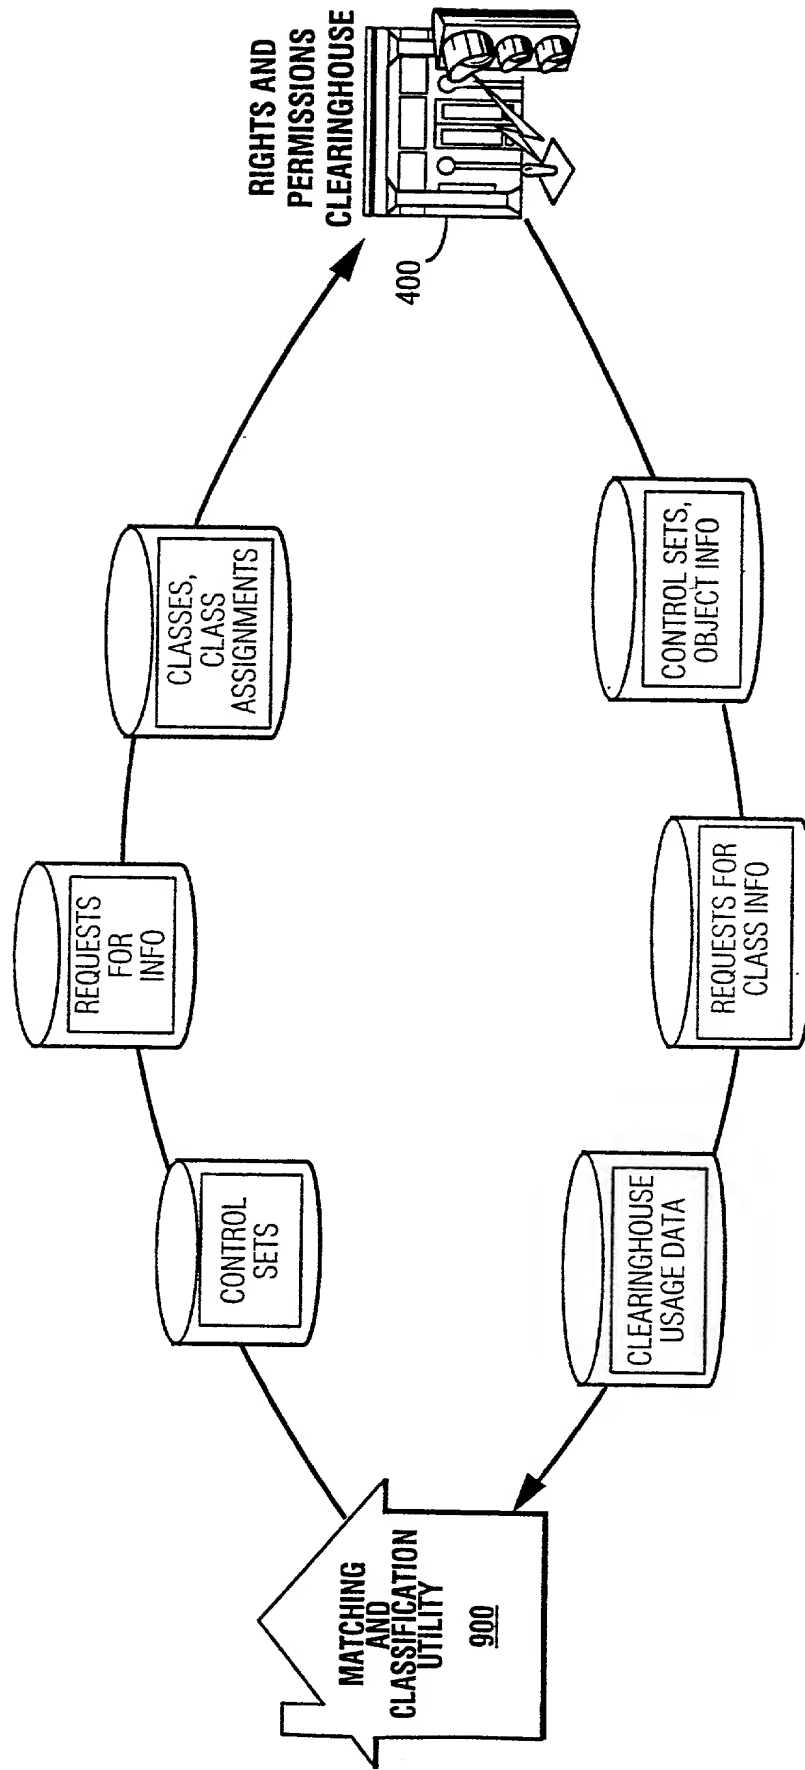


Fig. 15D

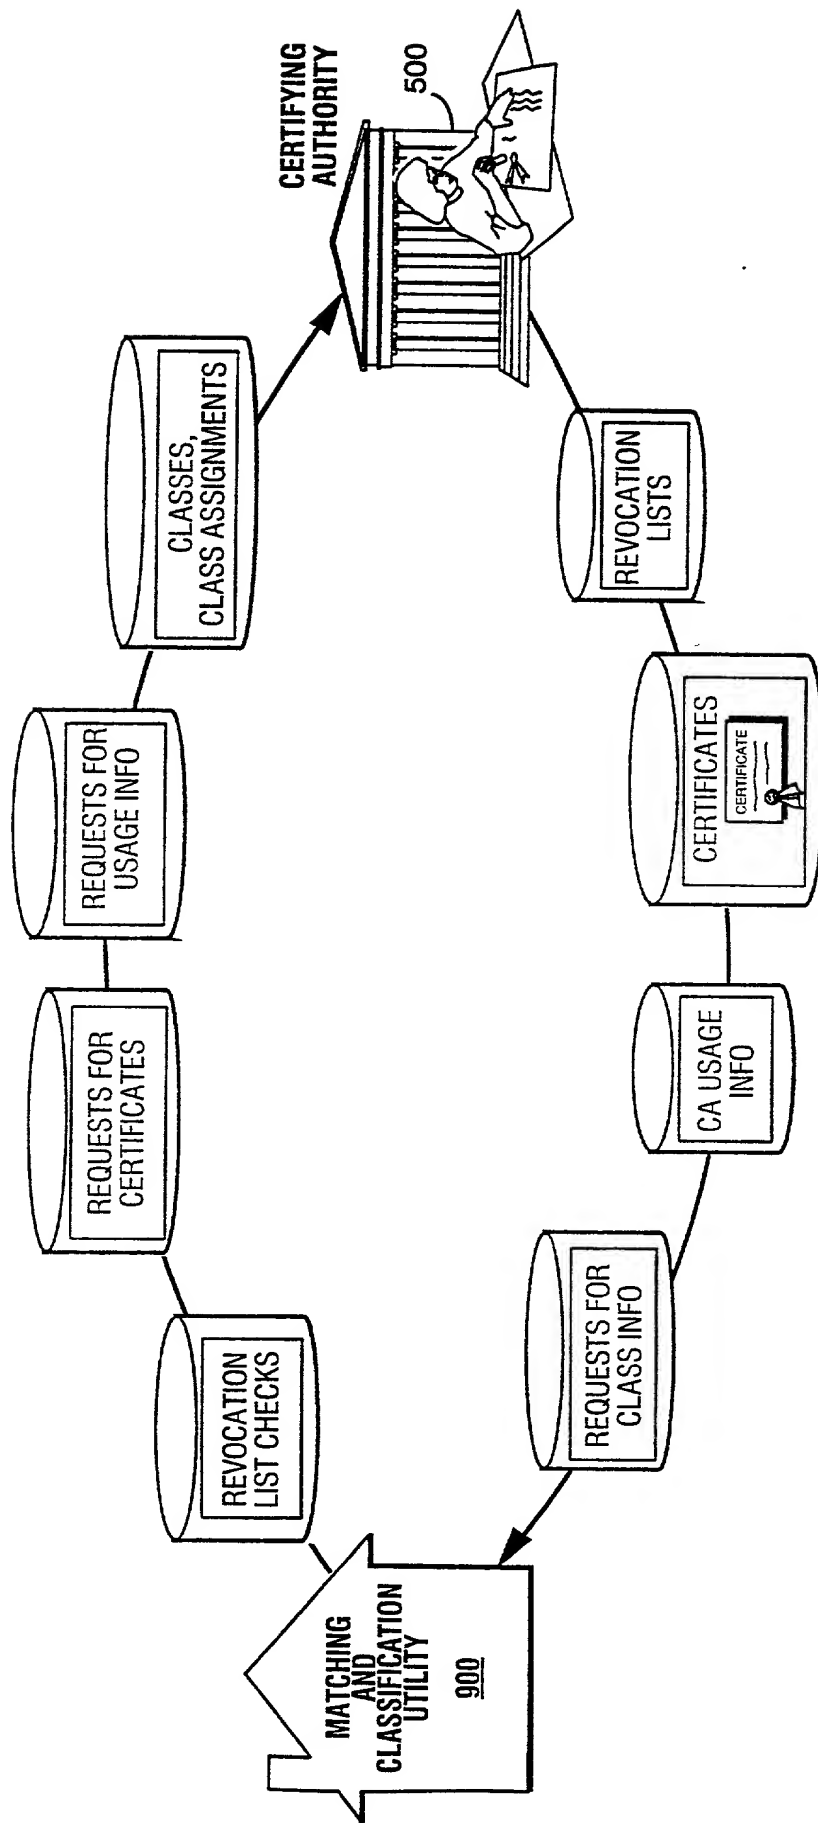


Fig. 15E

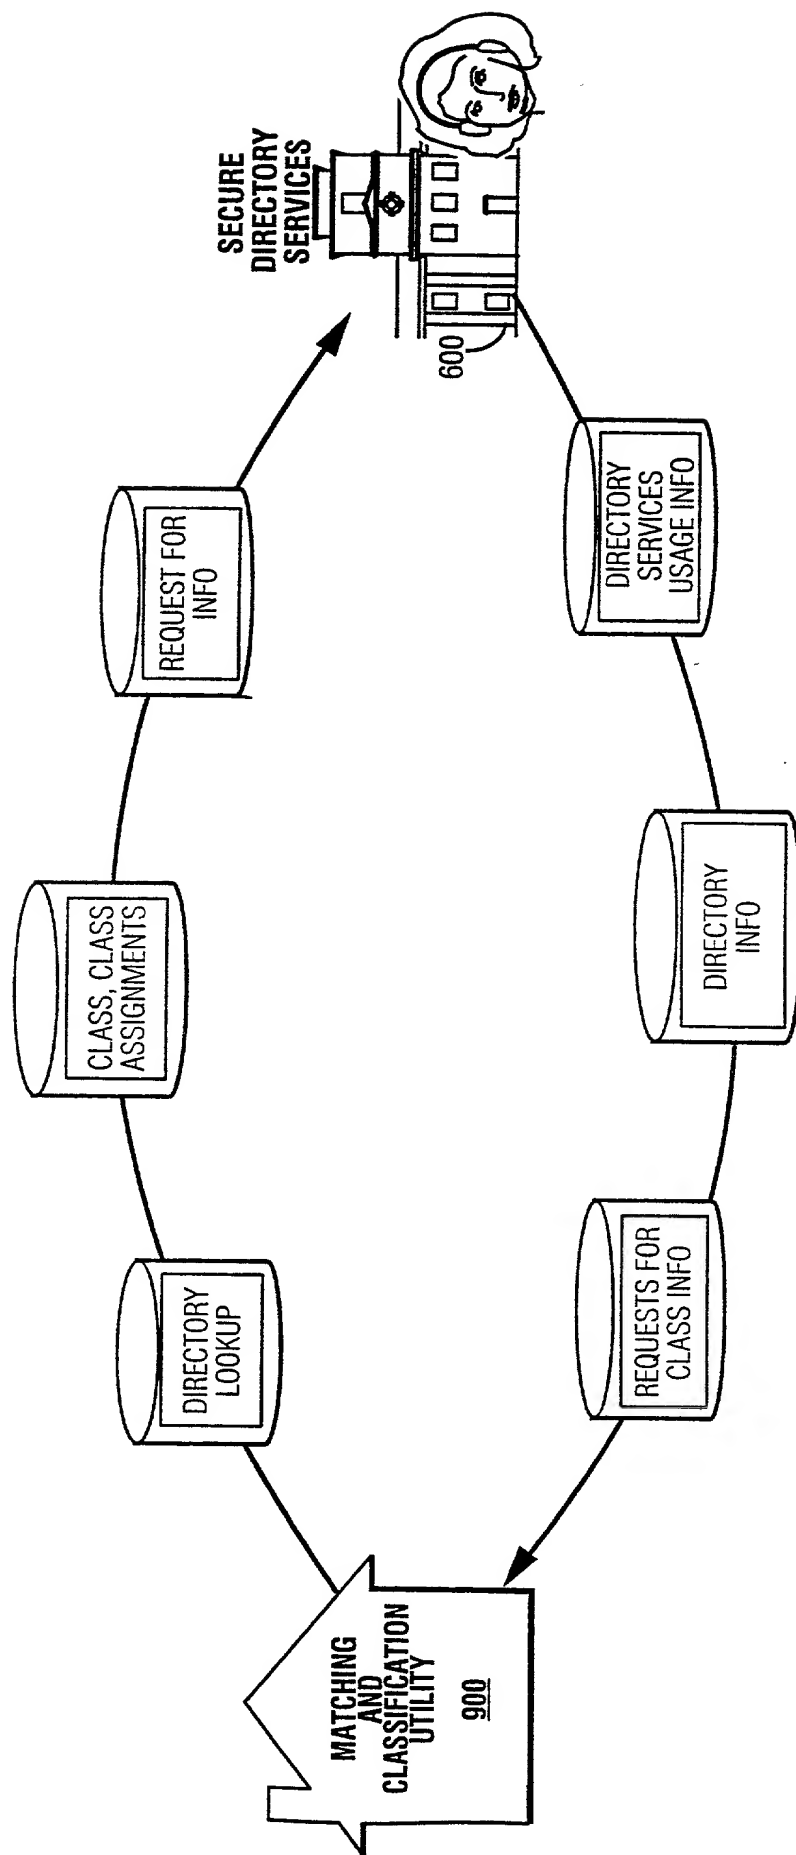


Fig. 15F

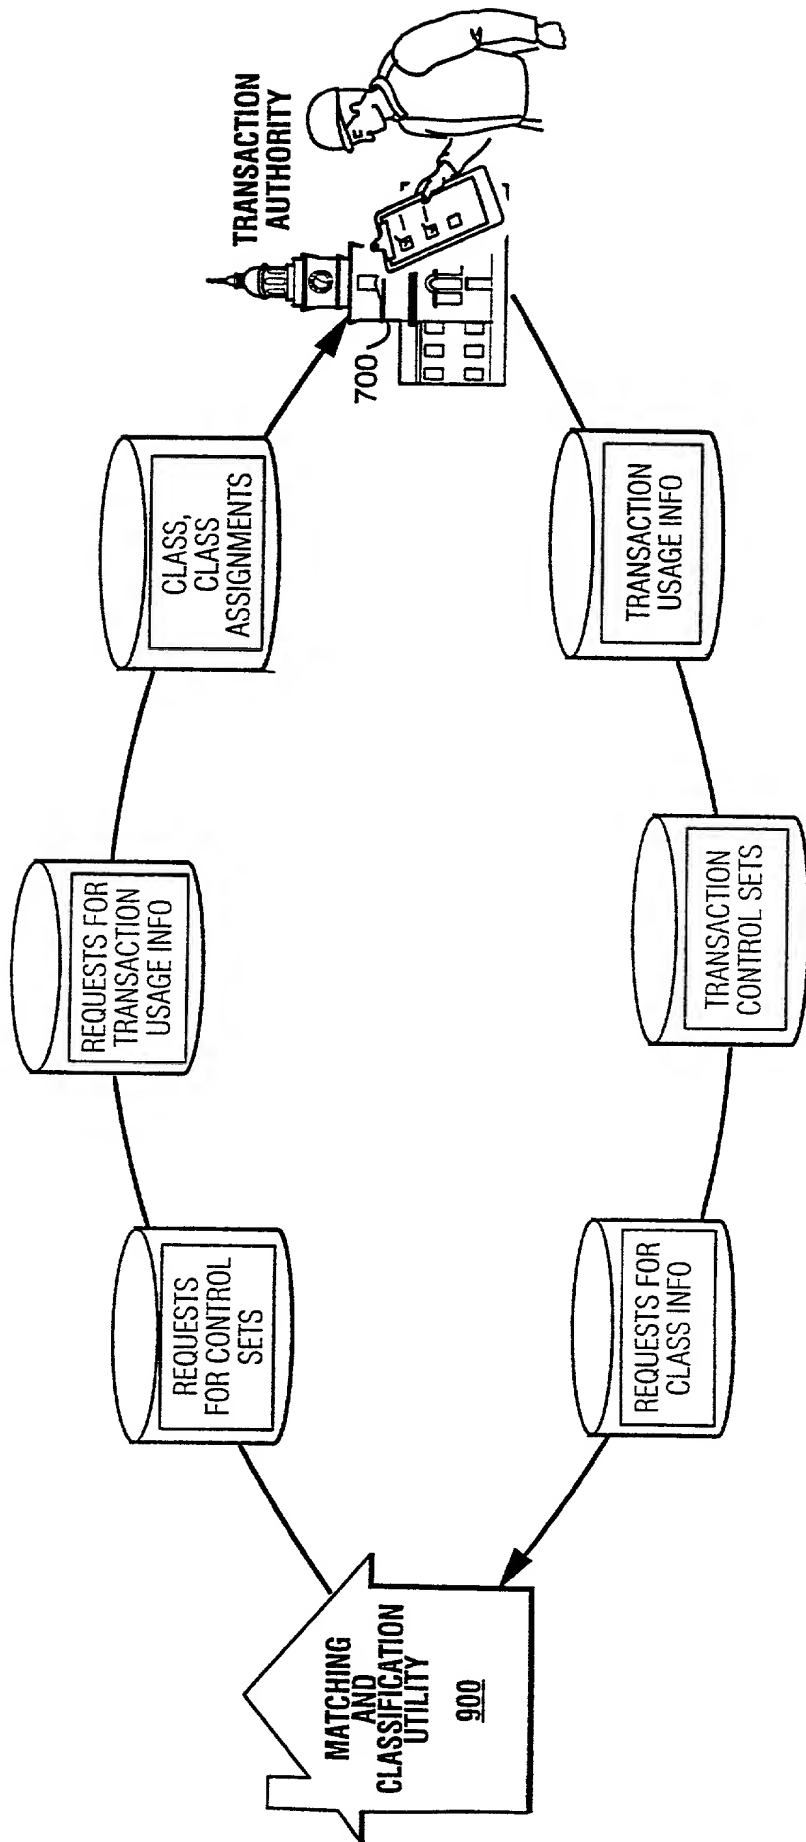


Fig. 15G

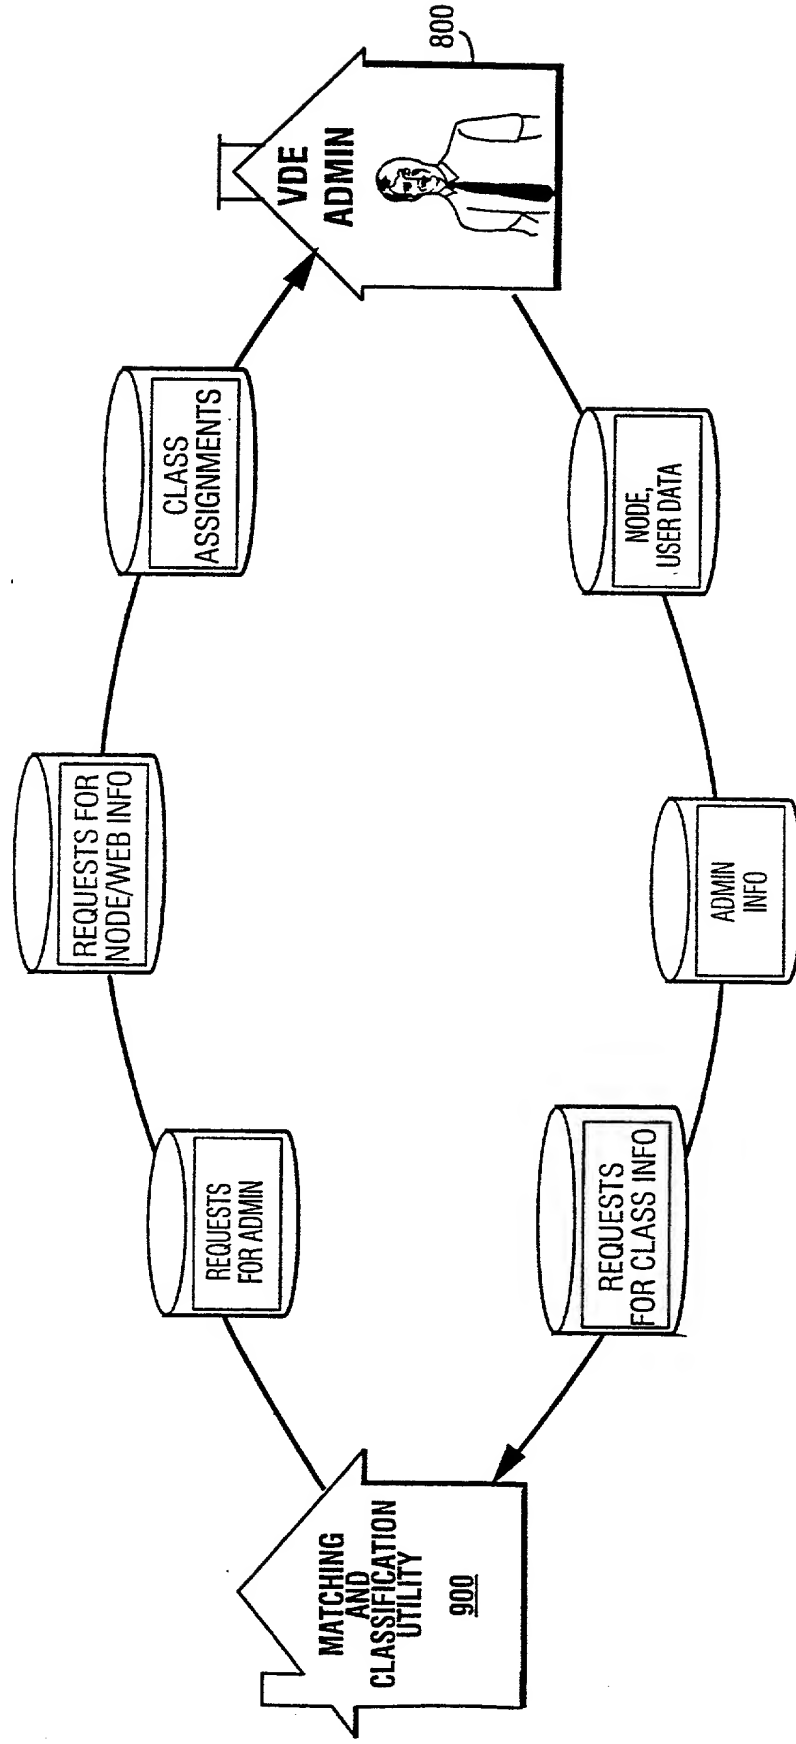


Fig. 16A

Hierarchy of Commerce
Utility Systems

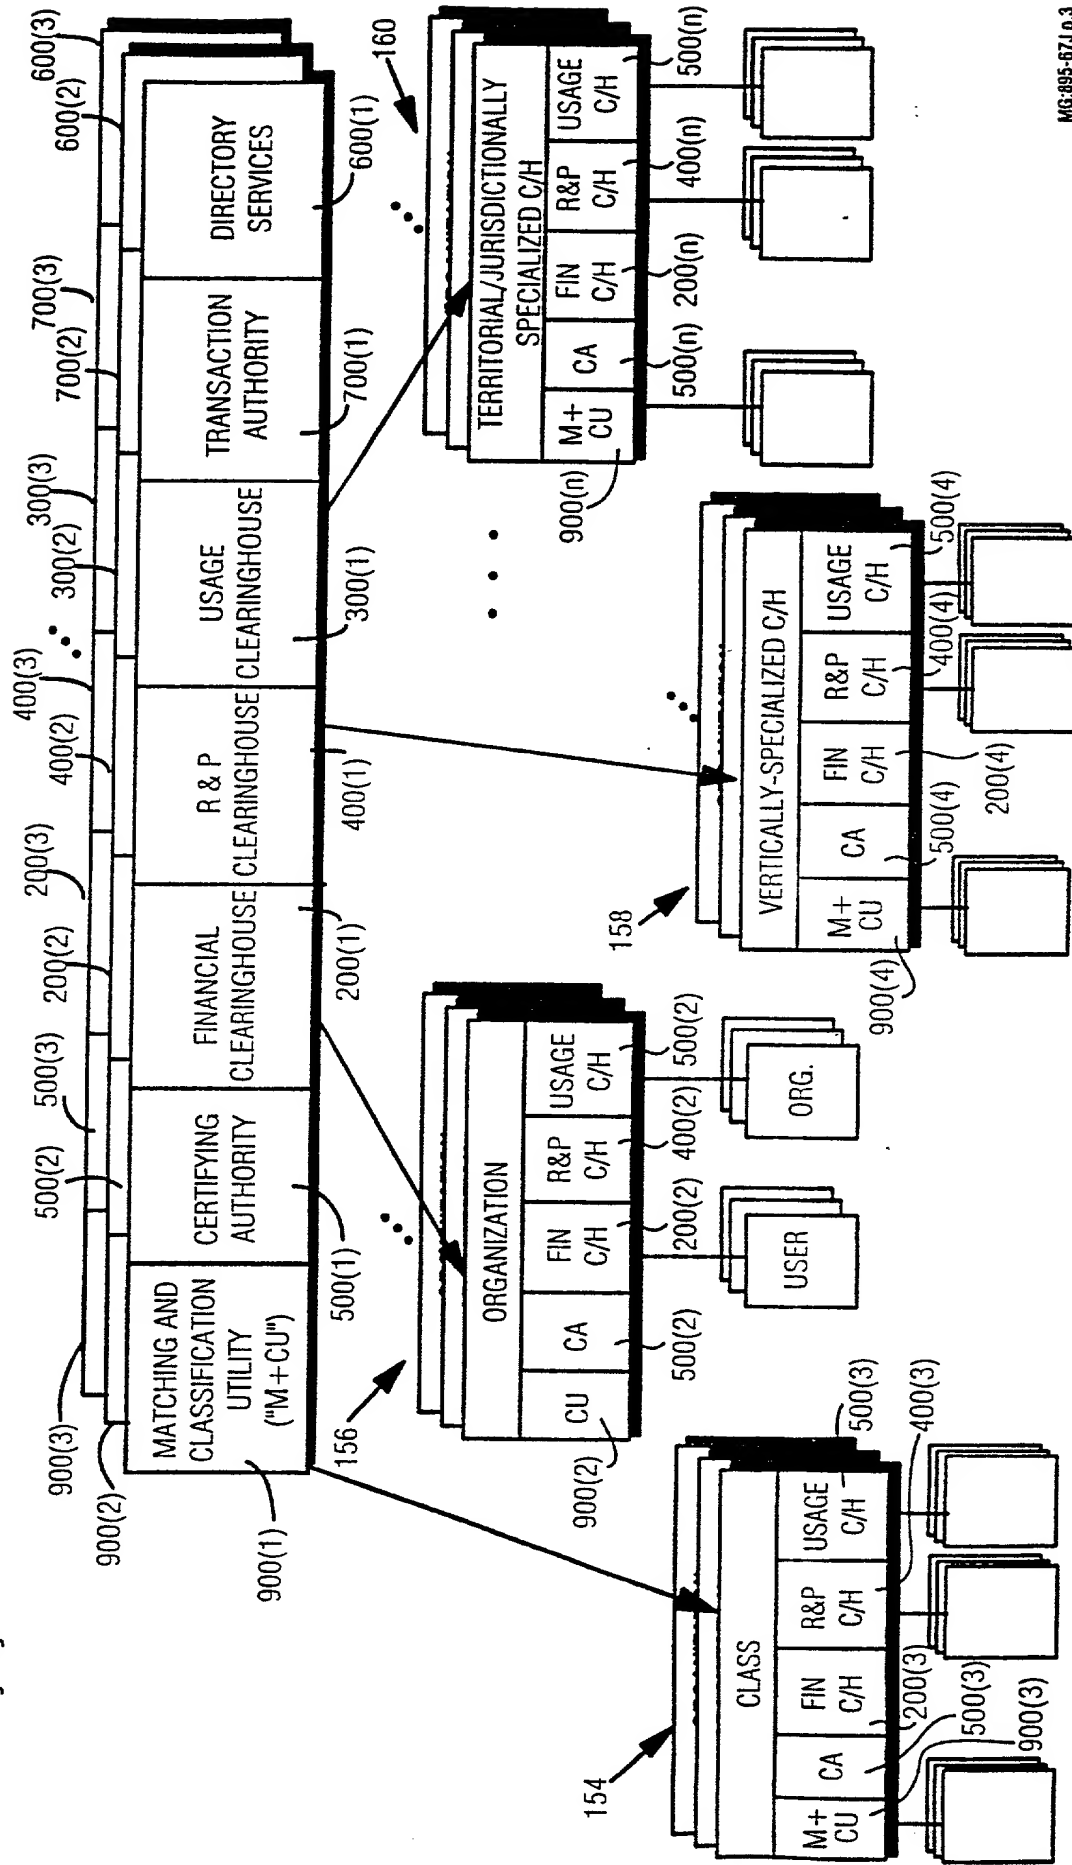


Fig. 16B Matching & Classification Utilities Provide Services To Classes Of Nodes, Users, Content Services, Transaction Services.

Matching and Classification Utility Systems

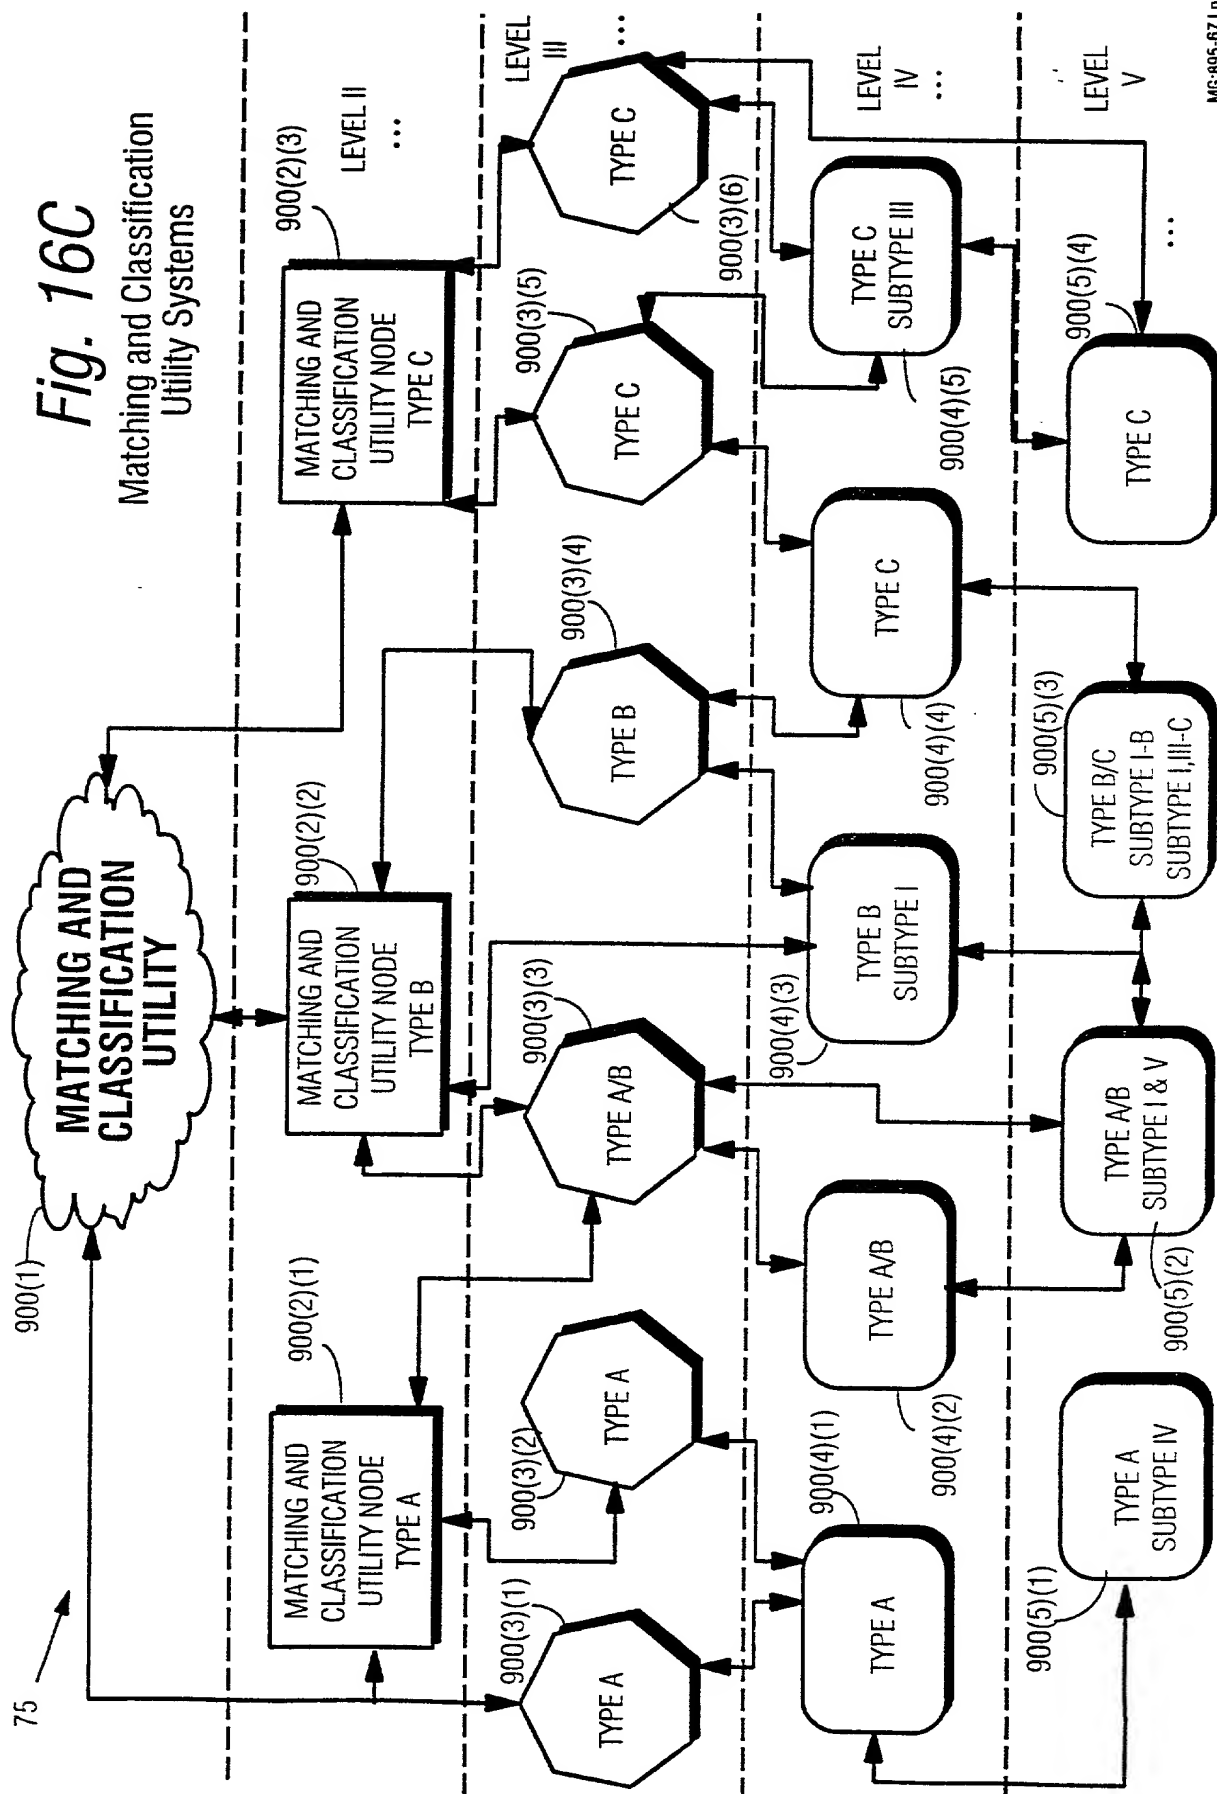


Fig. 17

FINANCIAL CLEARINGHOUSE	USAGE CLEARINGHOUSE	RIGHTS & PERMISSIONS CLEARINGHOUSE	CERTIFICATE AUTHORITY	SECURE DIRECTORY SERVICES	TANGIBLES & PURCHASE & FULFILLMENT	INTANGIBLES & PURCHASE & FULFILLMENT	CONTRACT NEGOTIATIONS & EXECUTION	EDI	SECURE DOCUMENT DELIVERY	BUSINESS PROCESS INTEGRATION	ARBITRATION & MEDIATION	ELECTRONIC ORDERS	ELECTRONIC BANKING & CURRENCY MANAGEMENT	CYBERSPACE TRADING ENVIRONMENTS	CLASSIFICATION UTILITY	...
AUDIT BY CLASS		MAINTAINING RECORDS		STATUS NOTIFICATION		EVENT DATABASE MANAGEMENT		CONTROL SET DATABASE MGMT		NOTARY		OBJECT REGISTRY		CERTIFICATE CREATION		...
OVERSEEING PROCESS		CONFIRMATIONS		ROUTING DATABASE		GENERATE CONTROL SETS		SEAL GENERATOR		DIGITAL TIME STAMP		OBJECT IDENTIFIER ASSIGNMENT		REVOCATION LIST MAINTENANCE		...
MONITORING STATUS		UNCOMPLETED EVENTS RECORD		GENERATING REQUESTS		PROCESS CONTROL LOGIC		FINGERPRINT / WATERMARK		COPYRIGHT REGISTRATION		CONTROL SET REGISTRY	
COMPLETE PROCESS DEFINITION		REQUIREMENTS GENERATION		REPLICATION		EVENT FLOW GENERATION		OFFERS & COUNTER OFFERS		TEMPLATE REGISTRY		DIRECTOR DATABASE MANAGEMENT	
PROCESS CONTROL		REPORT GENERATION		PROPAGATION		ROUTING		OFFERS & COUNTER OFFERS		ARCHIVE		DATABASE QUERY & RESPONSE PROCESSING	
INTERFACE(S) TO SETTLEMENT SERVICES		FUNDS TRANSFER		EVENT CONSEQUENCES		USAGE DATABASE MANAGEMENT		ARCHIVE		ADVERTISING DATABASE MANAGEMENT	
CURRENCY CONVERSION		TAX CALCULATION & APPLICATION		ACCOUNT RECONCILIATION		BILL CREATION & PROCESSING		RIGHTS & PERMISSION DATABASE MANAGEMENT		ADVERTISING DATABASE MANAGEMENT	
ACCOUNT CREATION & IDENTIFIER ASSIGNMENT		PAYMENT AGGREGATION		IDENTITY AUTHENTICATION		MARKET RESEARCH		TEMPLATE DATABASE MANAGEMENT		AUTOMATIC CLASS GENERATION MATCHING	
PAYMENT DISAGGREGATION		BUDGET PRE-AUTHORIZATION		ELECTRONIC CURRENCY CREATION		NEGOTIATION		COMMERCE MGMT LANGUAGE PROCESSING		AUTOMATIC CLASS ASSIGNMENT		CLASS BASED SEARCHING	
:		:		RIGHTS MANAGEMENT LANGUAGE PROCESSING		:		:		:		CLASS BASED DIRECTORY	

908

90B

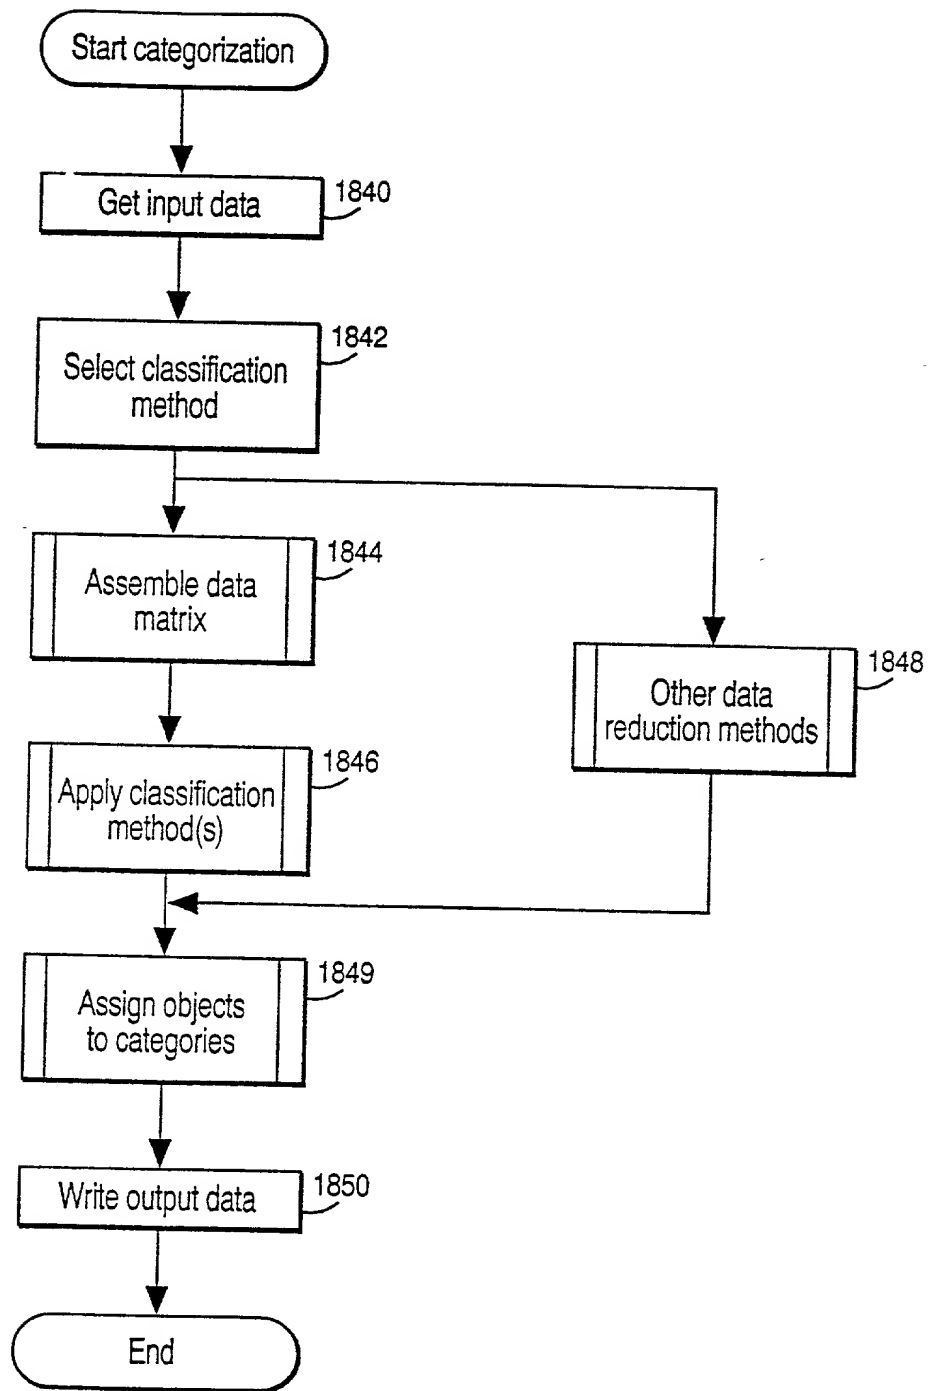


Fig. 18
Example Steps to Categorize Objects

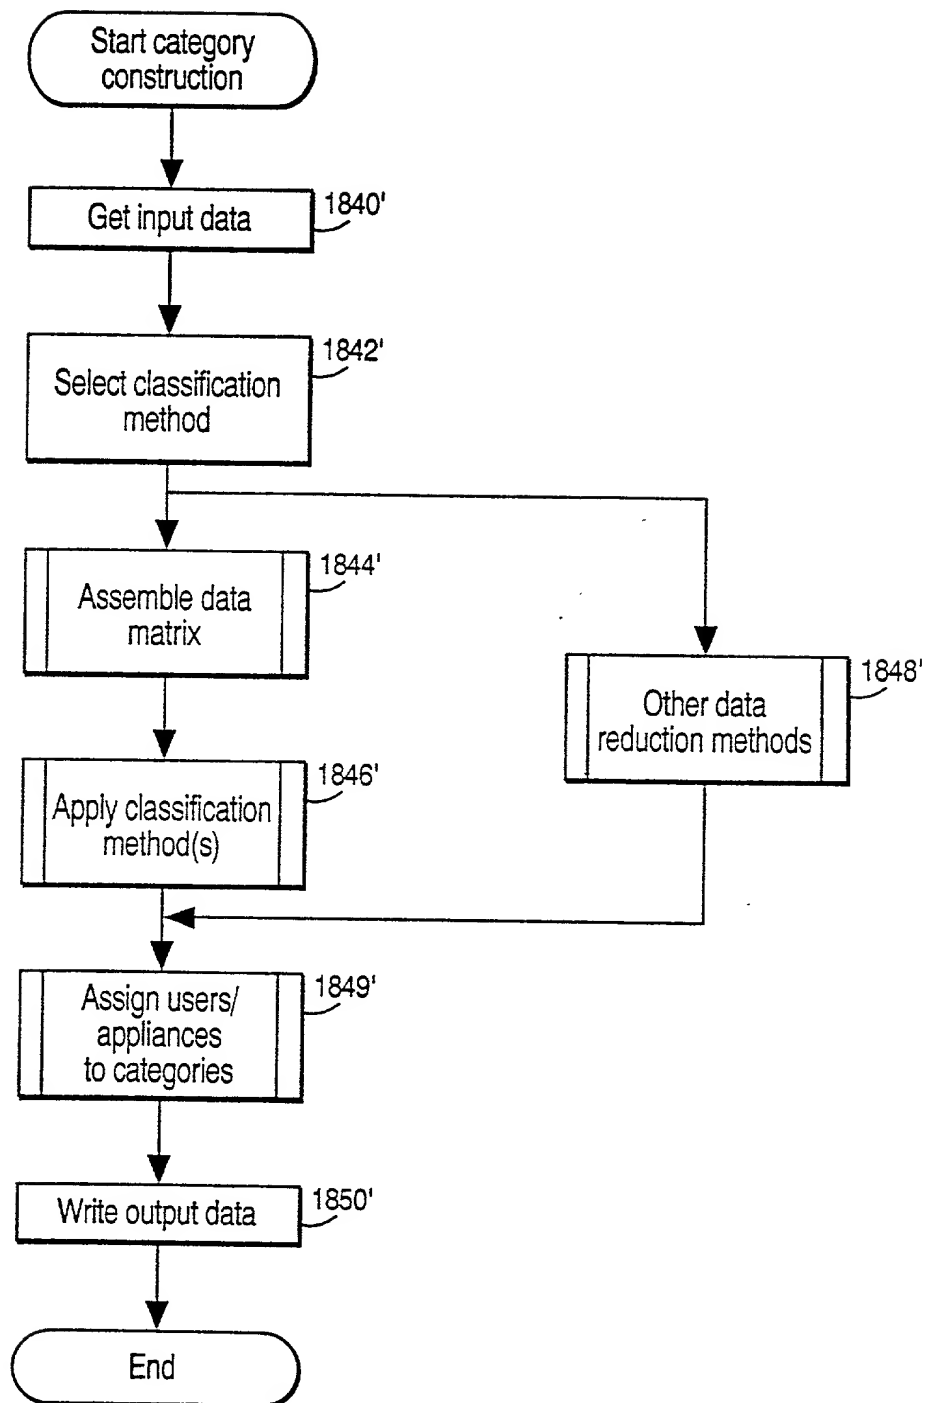


Fig. 19

Example Steps to Categorize Users/Appliances

Node ID	Operating system	Country	State	VDE Adm. Org.	VDE version	VDE maintenance level	User ID number	Gender	Age	Highest edu. level	Citizenship	Country of residence	City
128.1.4.132	WIN95	USA	CA	VDEADM	1.5	02	FF98C48A	Female	32	14	UK	UK	London

1852

Myers-Briggs Categories					SRI internet IVALS category
User ID	Extroversion or introversion	Sensing or intuition	Thinking or feeling	Judging or perceiving	
FF98C48A	I	N	T	J	Worker
...					...

Fig. 20
Example Composite Record-Input
To Classification Process

User ID number	Object ID	Right ID	Method	Right ID	Method	Right ID	Method	Right ID	Method
CF129CD5	1227-33-1298-2	Use	Open	Meter	Each time	Budget	Simple purchase	\$1.00	Bill	VISA

001020 9260100

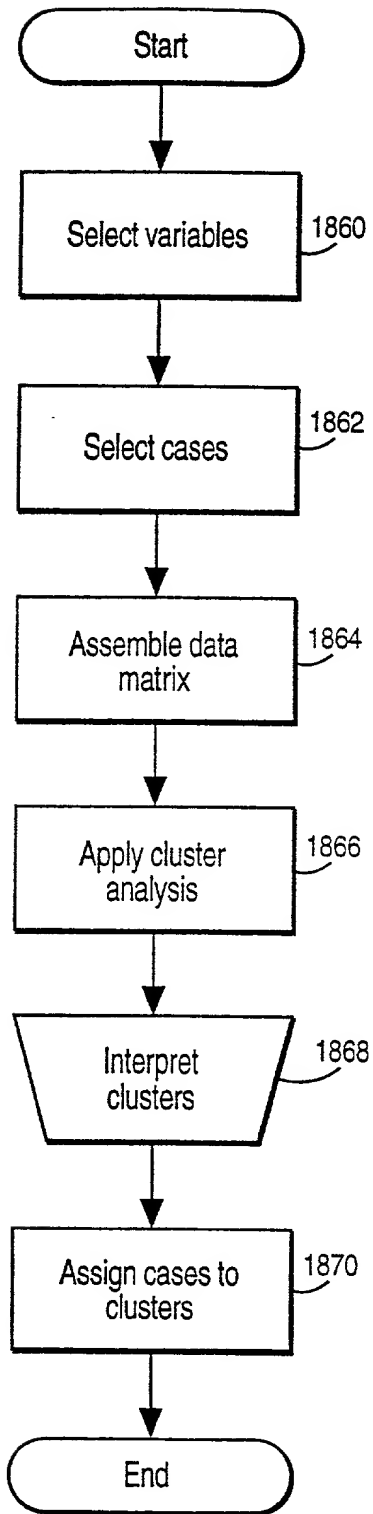


Fig. 21
Example Cluster Analysis Process

Variables	Typical Class 1-Profile	Typical Class 2-Profile
City	Washington, DC	Knoxville, TN
Av. price of content purchased last 30 days	\$8.79	\$1.95
Number of trips abroad in last 2 years	3	0
Type of content most frequently purchased	National and international news	Sports
2nd most frequently purchased	Business information	Religious
Third most frequently purchased	Travel information	Movies
Pay per view	No	Yes
Add new controls to content	Yes	No
Stated religious affiliation	None	Methodist
SRI internet lifestyle category	Surfer	Worker
Modification rights purchased	20% of text items	5% of text items

Fig. 22 Example Classification Output Illustrating Different Classes Based Upon Differing Profiles

Variables	Factor 1 Loadings	Factor 2 Loadings
Region of US	.82	.11
Family income	.90	-.09
Av. price of content purchased last 30 days	.72	.15
Number of trips abroad in last 2 years	.91	.09
Percent news, business	.79	-.12
Percent entertainment	-.69	.21
Add new controls to content	.88	.19
Religiosity	-.60	-.22
Participates in sports	-.21	.87
Watches team/individual sports on TV	-.11	.62
Owns a sports utility vehicle	.12	.72
Consumes beer/wine	-.18	.83
Male/female	.21	.92
Education beyond college	.45	-.45
Buys pay per view sports events	-.25	.77
Number of TVs in house	-.11	.66

Fig. 23 Example Classification Output Illustrating Principal Components Analysis On Parameter Data And Categories Data

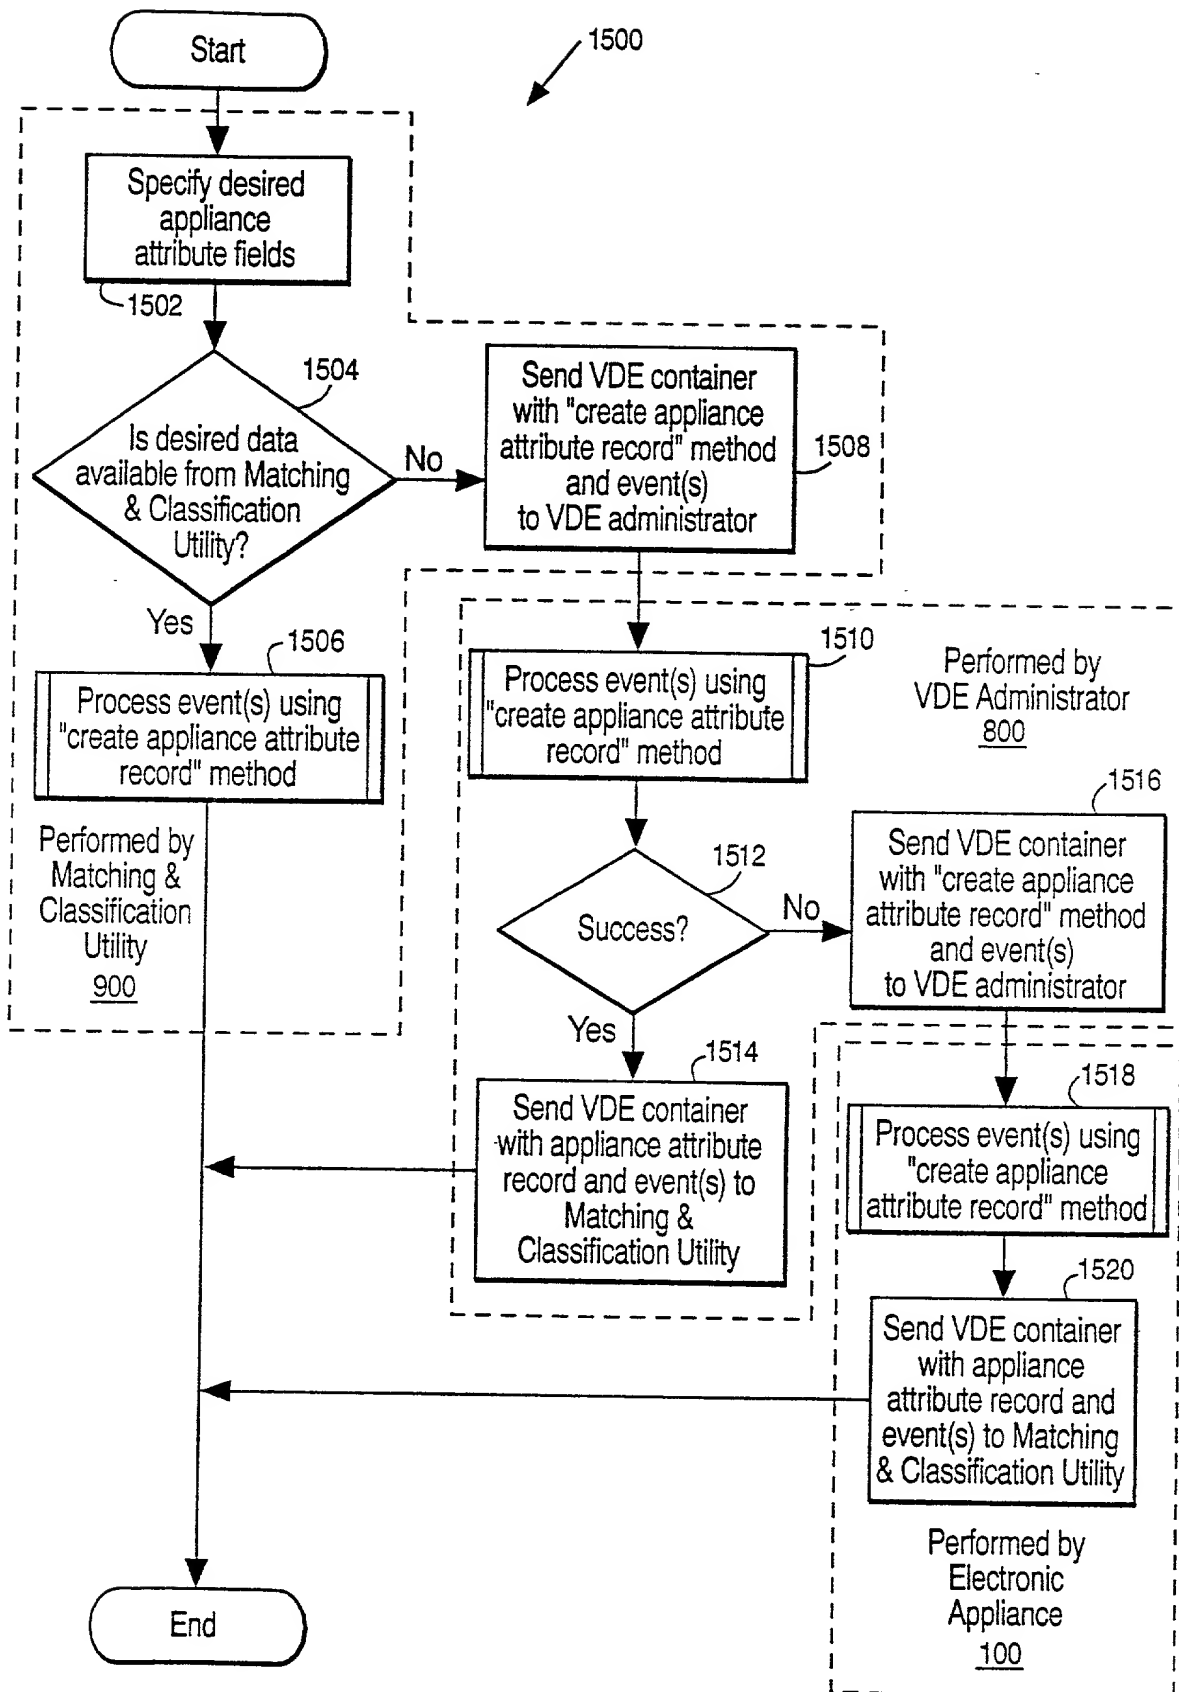


Fig. 24

Example Steps for Collecting Appliance Attribute Data

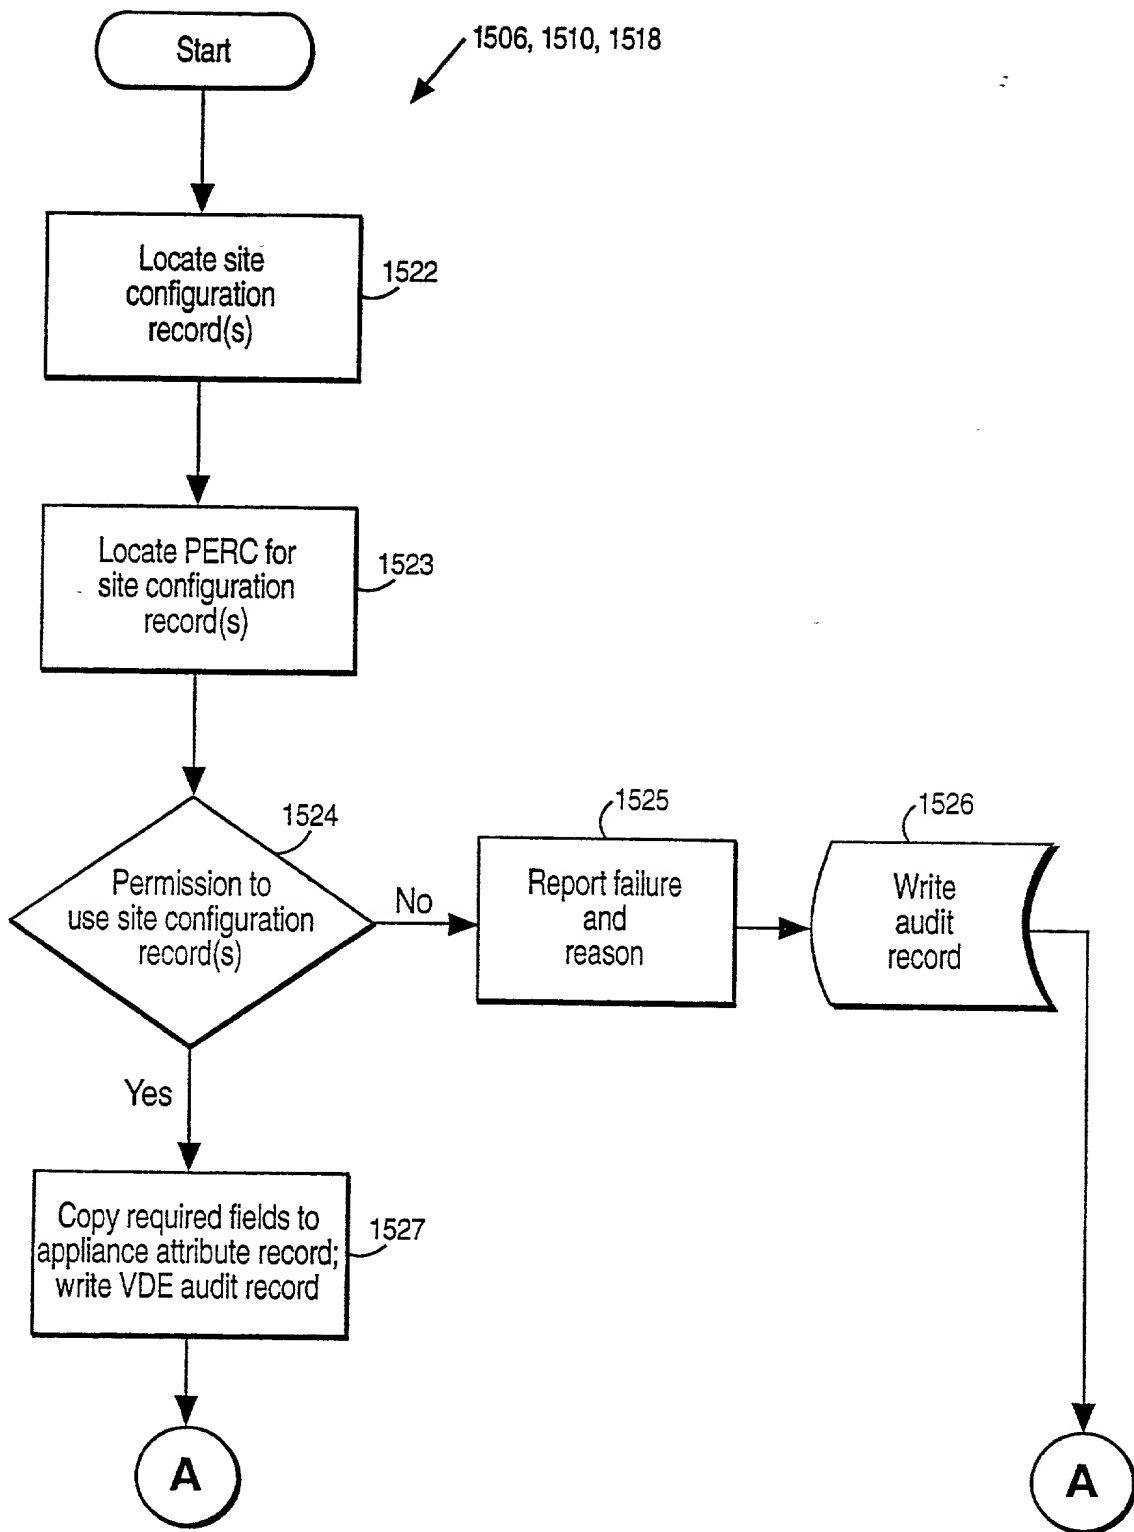


Fig. 25(A)

Example Create Appliance Attribute Data Method steps

Fig. 25(B)

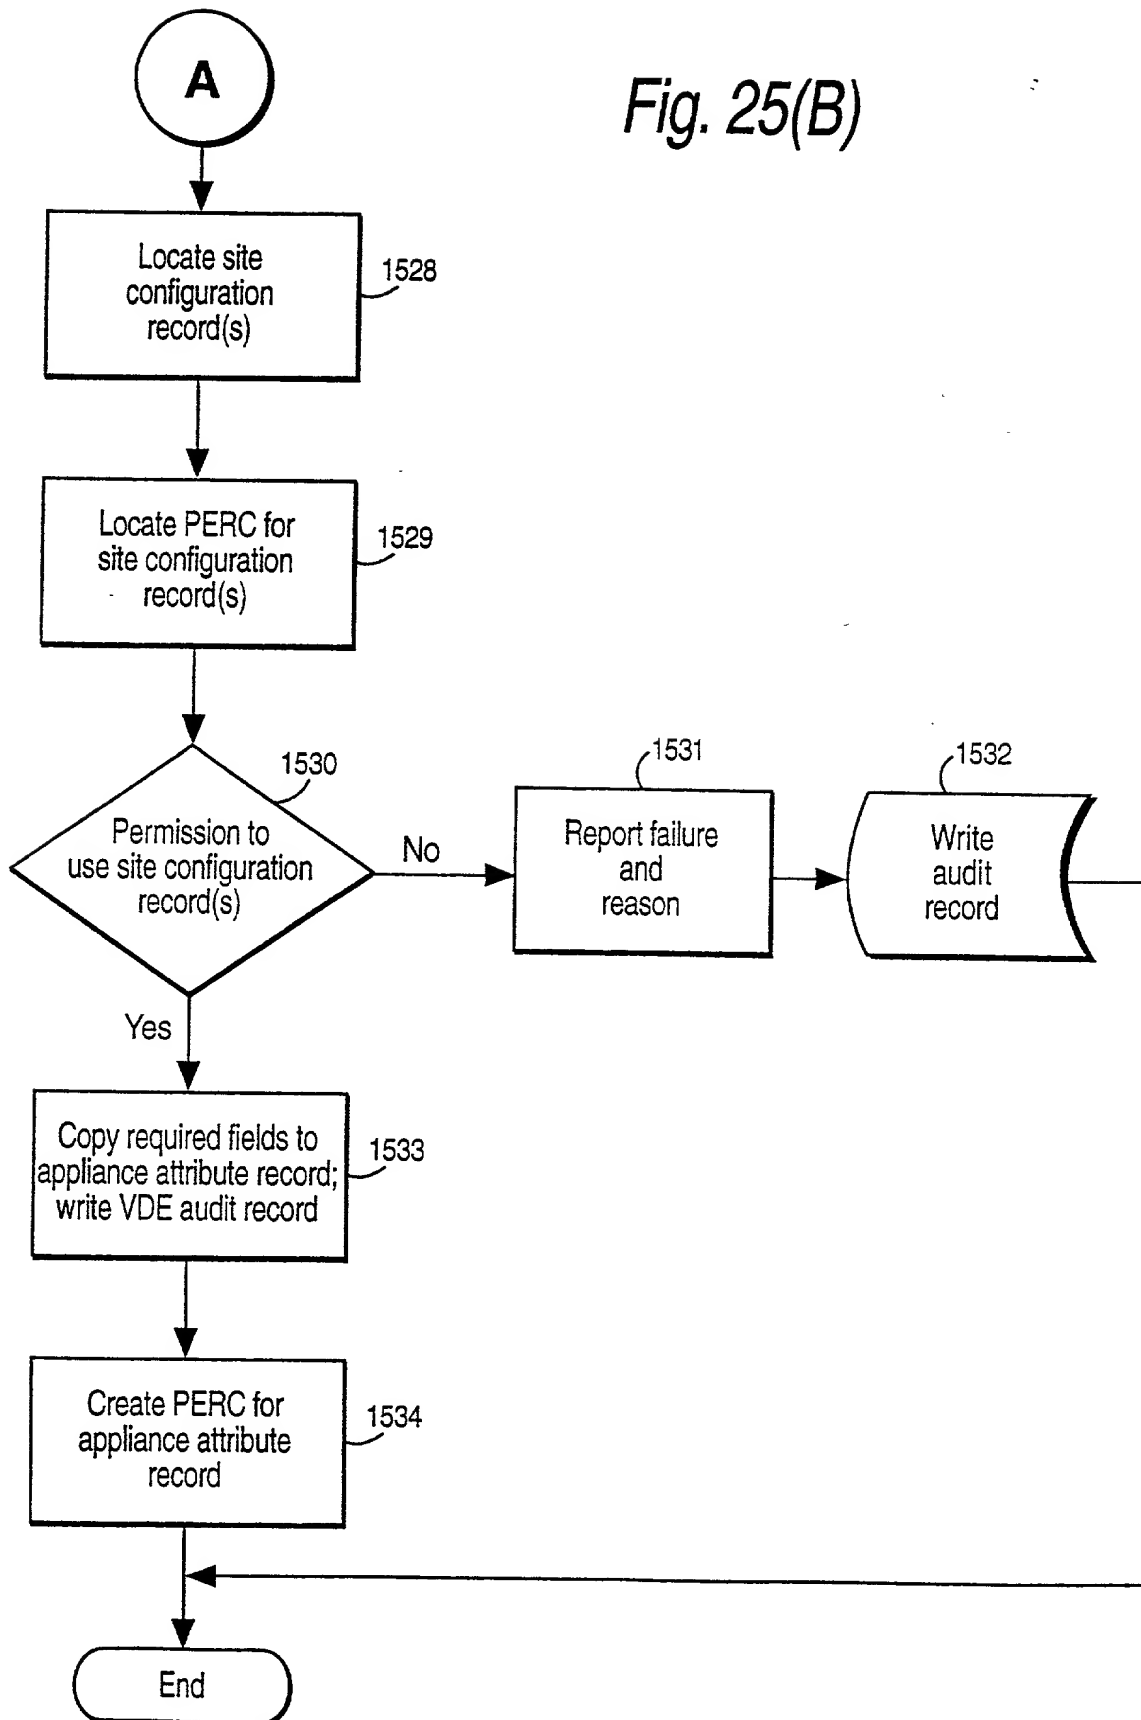


Fig. 26(A) Example Appliance Attribute Record

Appliance ID	Attr1	Attr2	Attr3	Attr4	Attr5	Attr6	Attr7	Attr8	Attr9	Attr N
1535-1											1538(N)

Fig. 26(B)

Appliance ID		Operating system	Country	State	VDE Adm. Org.	VDE version	VDE maintenance level	VDE
128.1.4.132		WIN95	USA	CA	VDEADM	1.5	02
1536(1)		1538(A)		1538(B)	1538(D)		1538(E)	1538(F)
		1538(C)						

Appliance ID		Operating system	Country	State	VDE Adm. Org.	VDE version	VDE maintenance level	VDE
128.1.4.132		1	1	8	23	1.5	2	1535-3
1536(1)		1538(B)		1538(D)		1538(E)	1538(F)
1538(A)		1538(C)						

Fig. 26(C)
Example Appliance Attribute Record


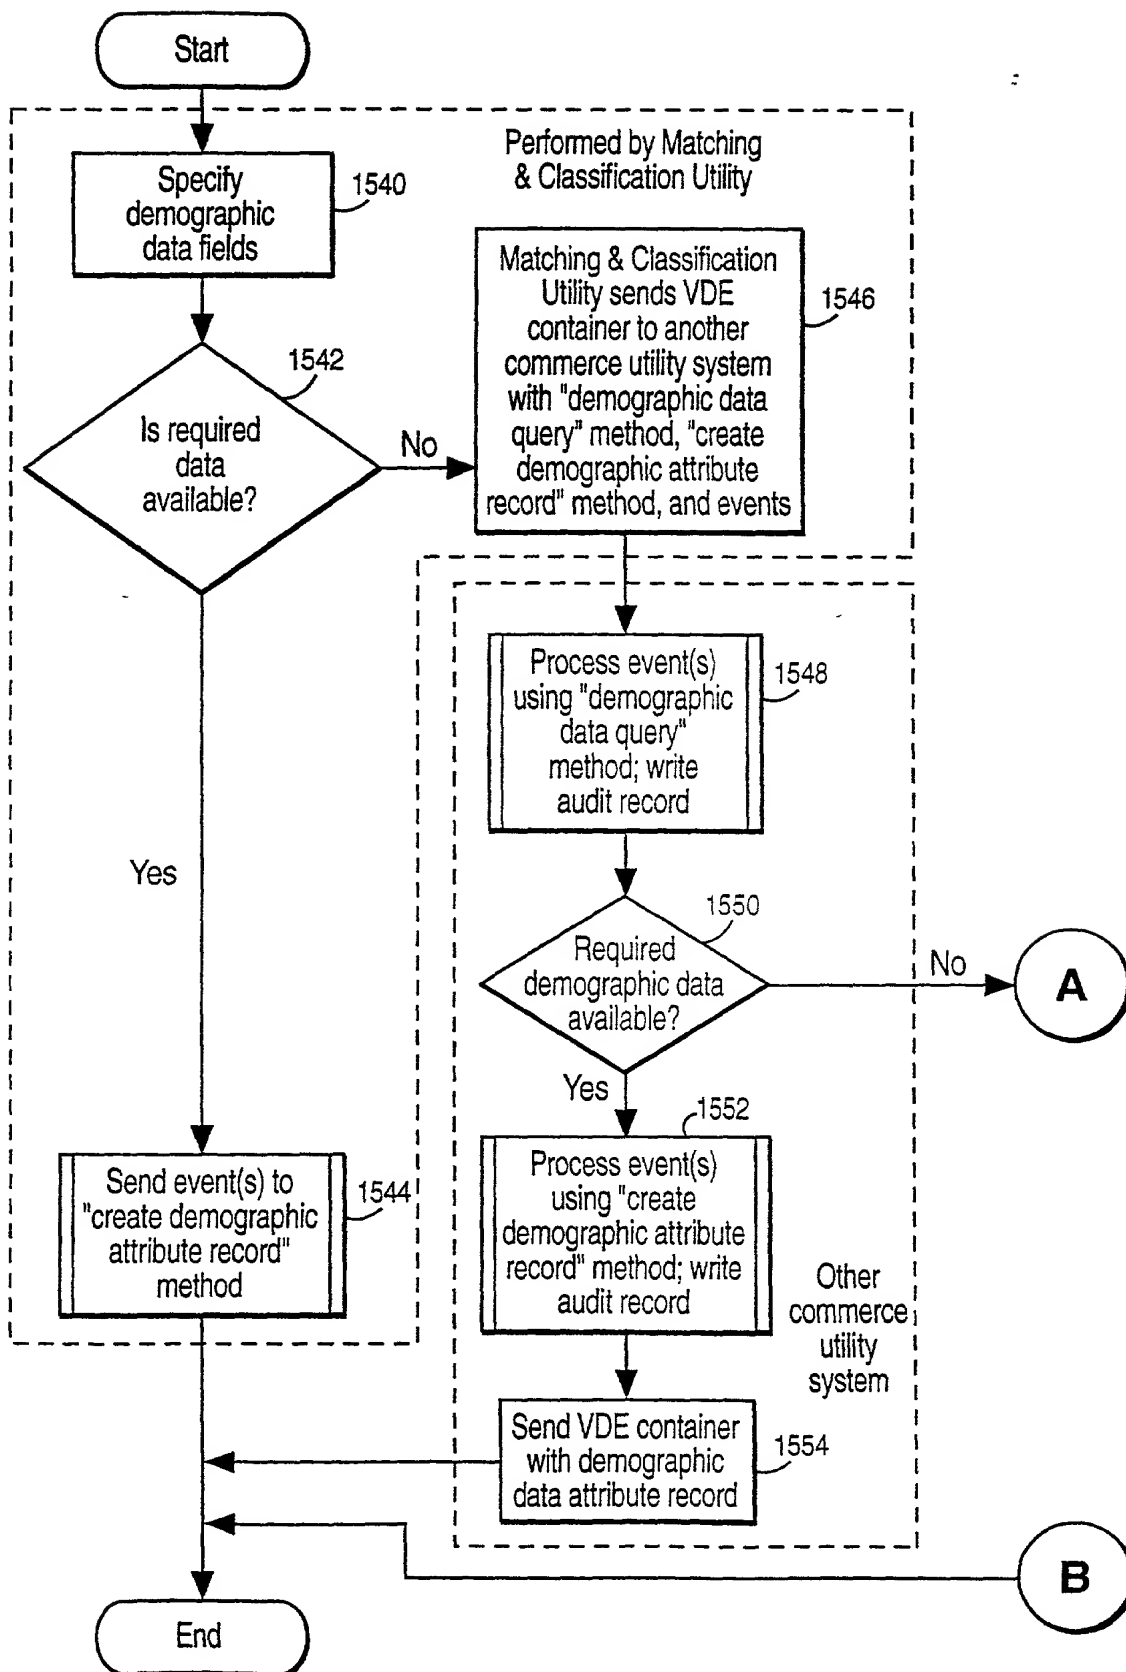


Fig. 27(A) Example Steps for Collecting Demographic Data

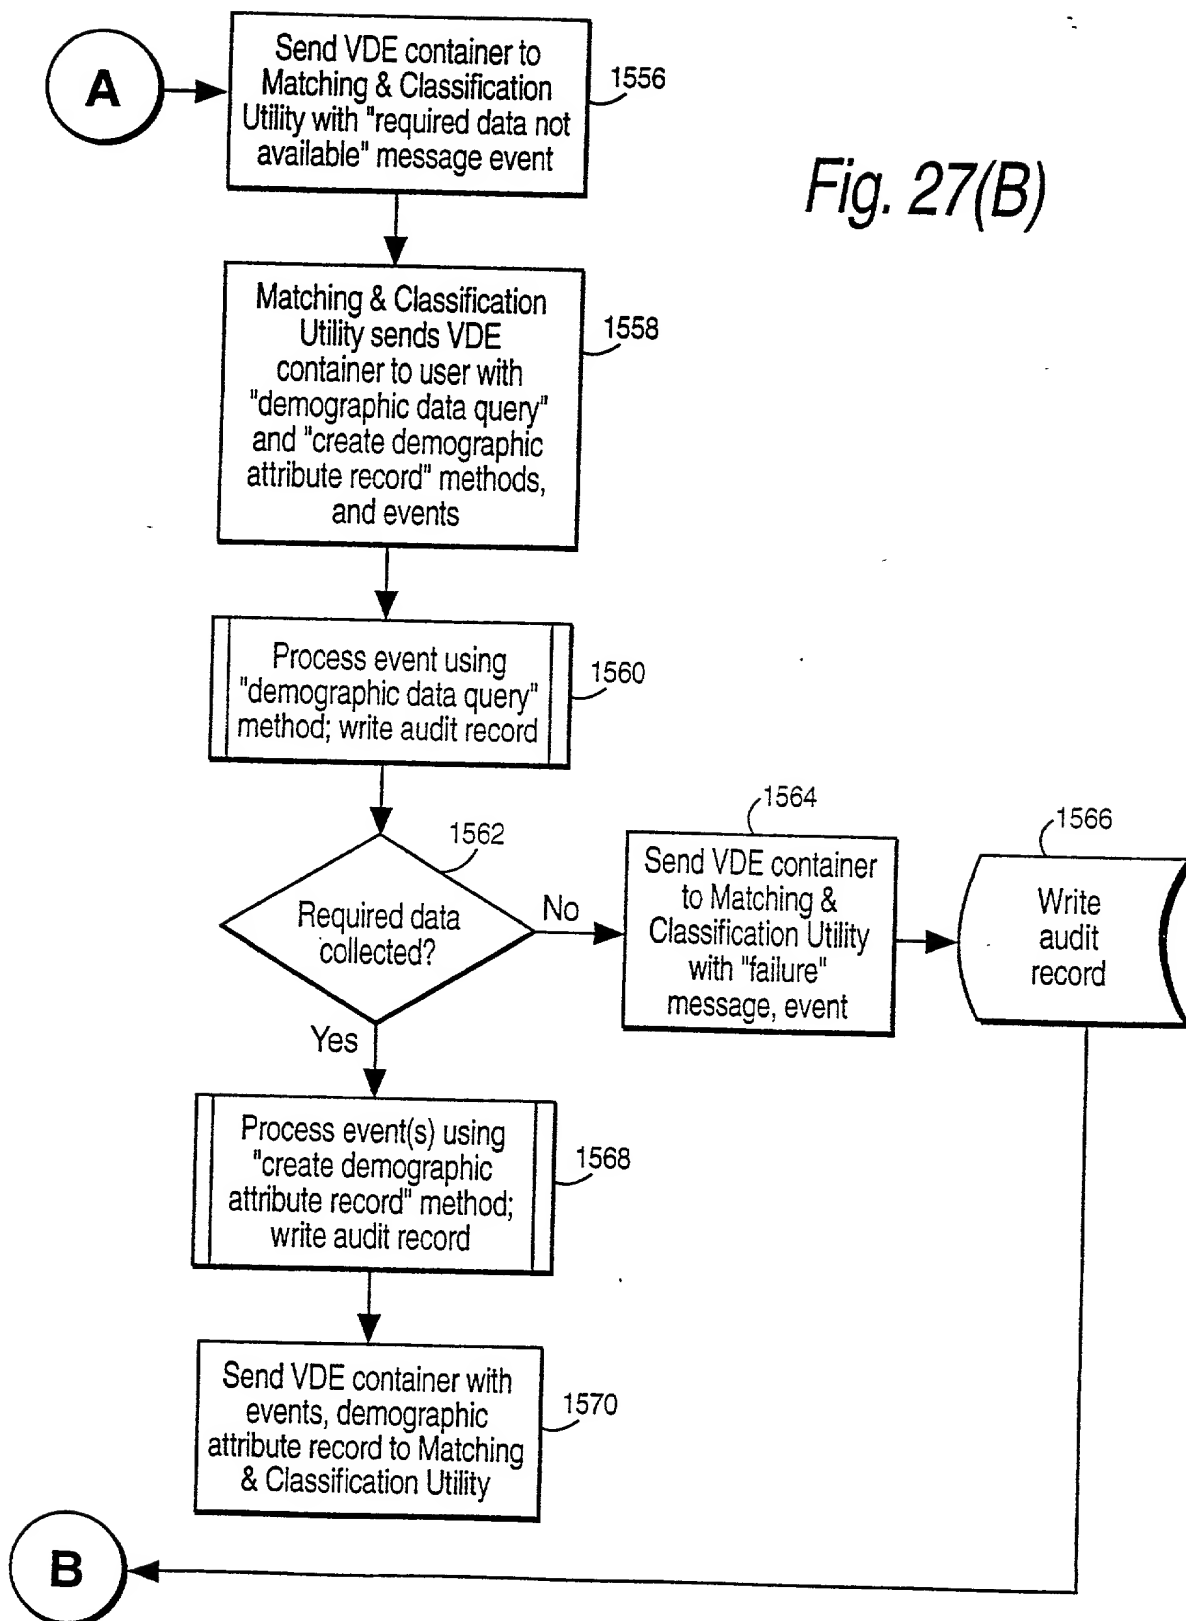

Demographic Information Questionnaire

Name: _____

Address: _____

Address: _____

City: _____ State: _____ Zip: _____ - _____

Gender (M/F) _____ Date of birth: _____ / _____ / _____

Education:

- ☐ Have not graduated high school
- ☐ High school graduate
- ☐ Some college
- ☐ College degree
- ☐ Some graduate school
- ☐ Advanced degree

All Information Will Be Treated As Confidential

Fig. 28 Example Demographic Questionnaire "Pop-Up" Screen

Fig. 29(A) Example User Demographic Attribute Information Record

User ID	Attr1	Attr2	Attr3	Attr4	Attr5	Attr6	Attr7	Attr8	Attr9	Attr N
1574	1576(1)										1576(N)

Fig. 29(B) Example Demographic Attribute Record

User ID number	Gender	Age	Highest edu. level	Citizenship	Country of residence	District	City	Street address
FF98C48A	Female	32	14	UK	UK	London	Westminster	32 Shepherd Market
1574	1576(A)		1576(B)	1576(C)	1576(D)	1576(F)	1576(G)	1576(H)	

Fig. 29(C) Example Demographic Attribute Record

User ID number	Gender	Age	Highest edu. level	Citizenship	Country of residence	District	City	Street address
FF98C48A	1	32	14	44	1	1	22	32 3243
1574	1576(A)		1576(B)	1576(C)	1576(D)	1576(F)	1576(G)	1576(H)

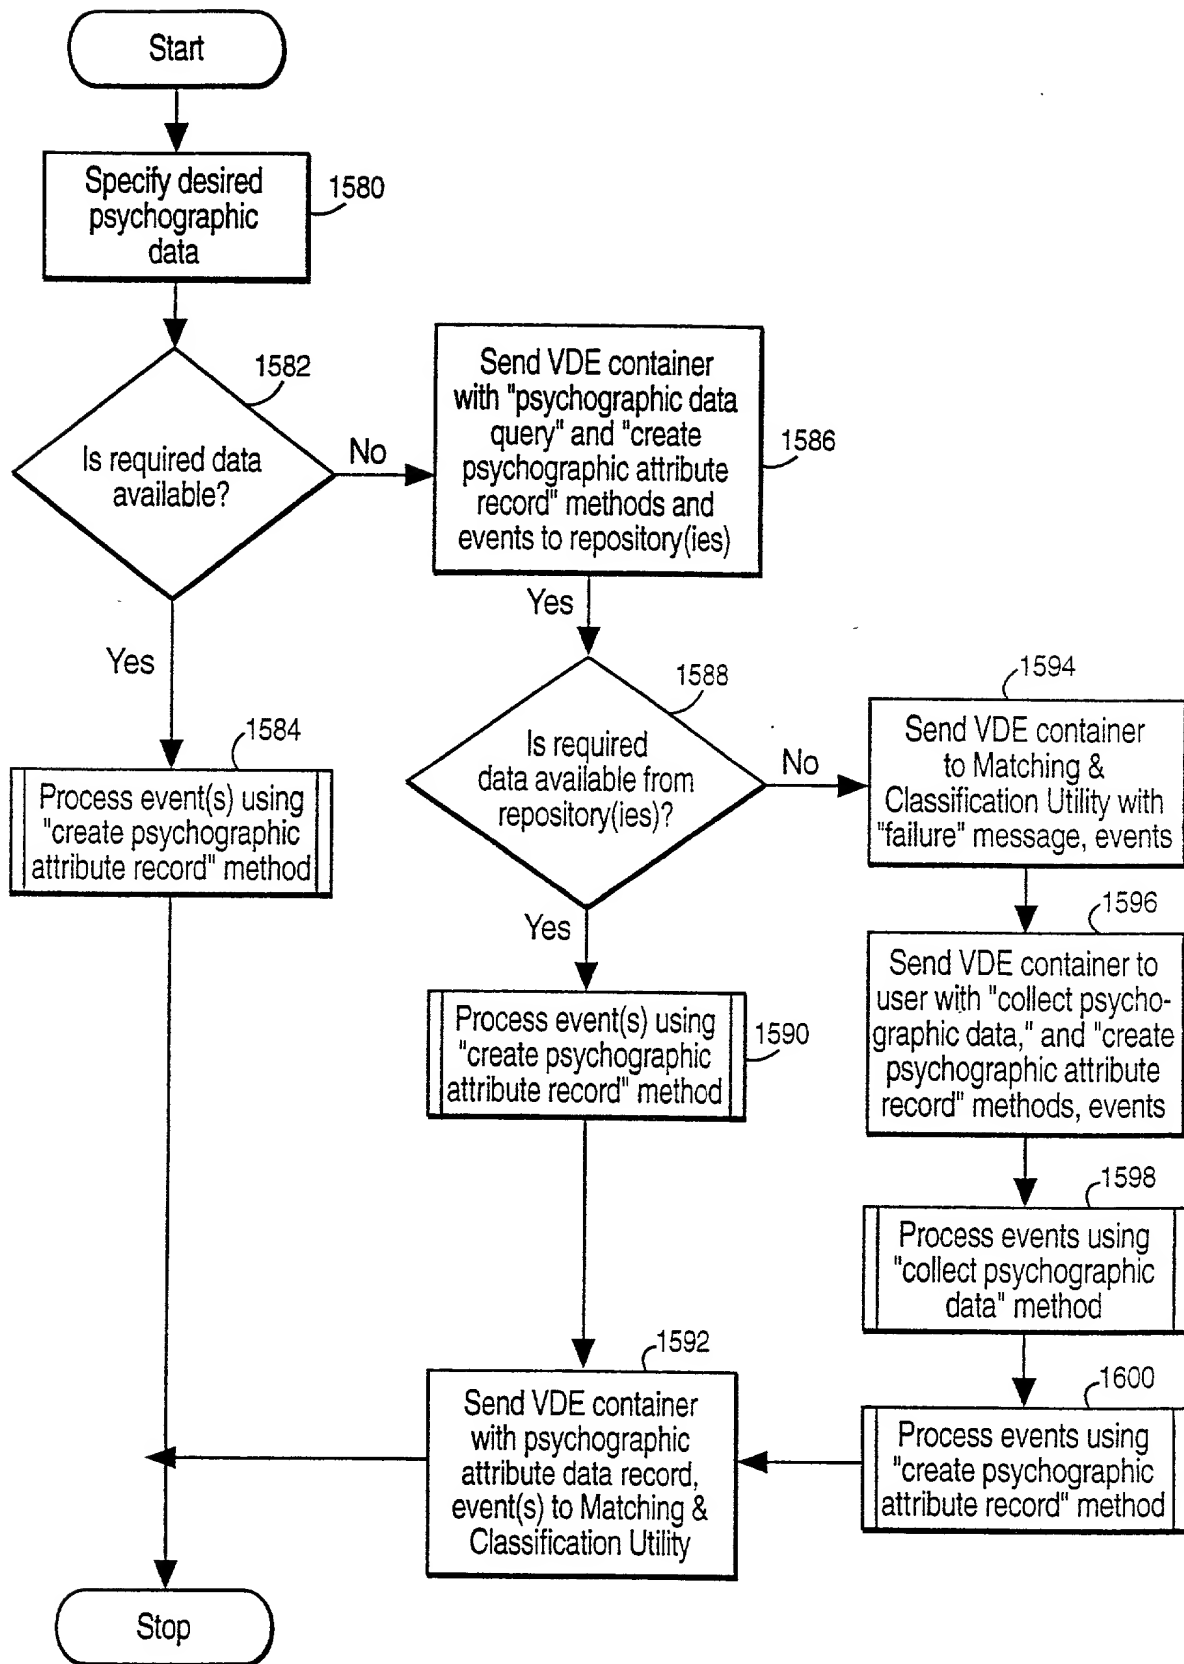


Fig. 30 Example Steps for Collecting Psychographic Data

Today's Anonymous Questionnaire
Thanks for taking the time to answer these questions
We'll put \$2.00 in your VDE budget

1. Do you feel sad, blue, unhappy or "down in the dumps"?

- ☐ A. Never
- ☐ B. Rarely
- ☐ C. Sometimes
- ☐ D. Very Often
- ☐ E. Most of the time

2. Do you feel tired, having little energy, unable to concentrate?

- ☐ A. Never
- ☐ B. Rarely
- ☐ C. Sometimes
- ☐ D. Very Often
- ☐ E. Most of the time

3. Do you feel uneasy, restless or irritable?

- ☐ A. Never
- ☐ B. Rarely
- ☐ C. Sometimes
- ☐ D. Very Often
- ☐ E. Most of the time

4. Do you have trouble sleeping or eating (too little or too much)?

- ☐ A. Never
- ☐ B. Rarely
- ☐ C. Sometimes
- ☐ D. Very Often
- ☐ E. Most of the time

☐ Click here for more questions

All Information Will Be Treated As Confidential

Fig. 31 Example Psychographic Questionnaire "Pop-Up" Screen

Fig. 32(A) Example User Psychographic Attribute Information Record

1602

User ID	Attr1	Attr2	Attr3	Attr4	Attr5	Attr6	Attr7	Attr8	Attr9	AttrN
---------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------	-------


1604 1606(1) 1606(N)

1602-1

User ID	Myers-Briggs Categories						SRI internet IVALS category
	Extroversion or introversion	Sensing or intuition	Thinking or feeling	Judging or perceiving			
FF98C48A	I	N	T	J			Worker

1604 1606A 1606B 1606C 1606D 1606E

Fig. 32(B)
Example User Psychographic Attribute Record

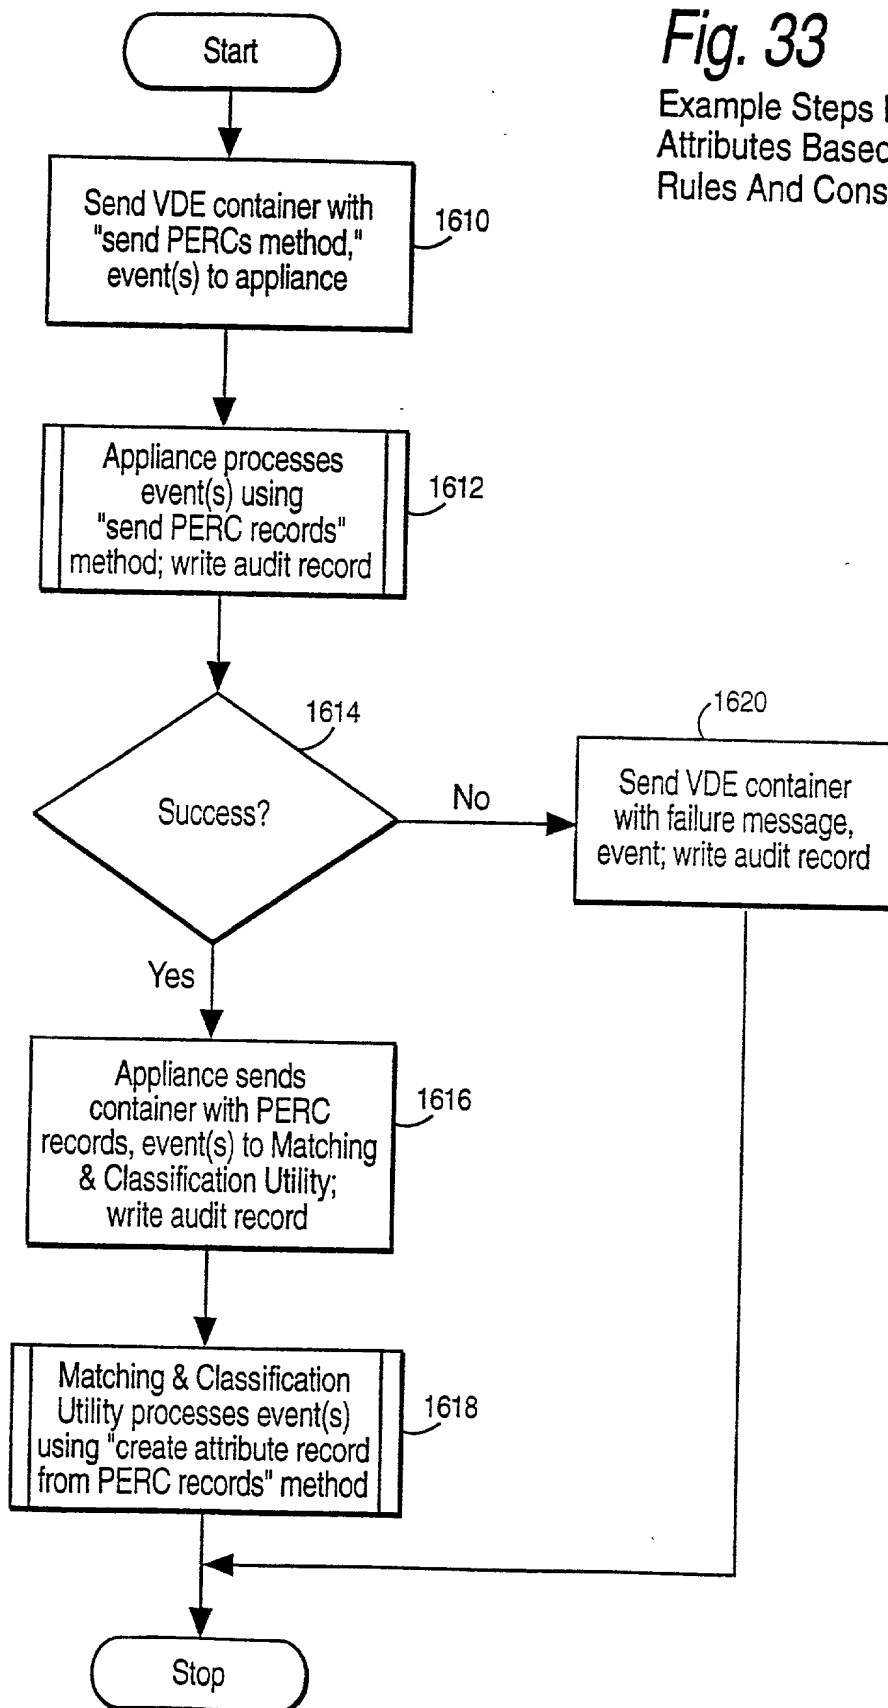

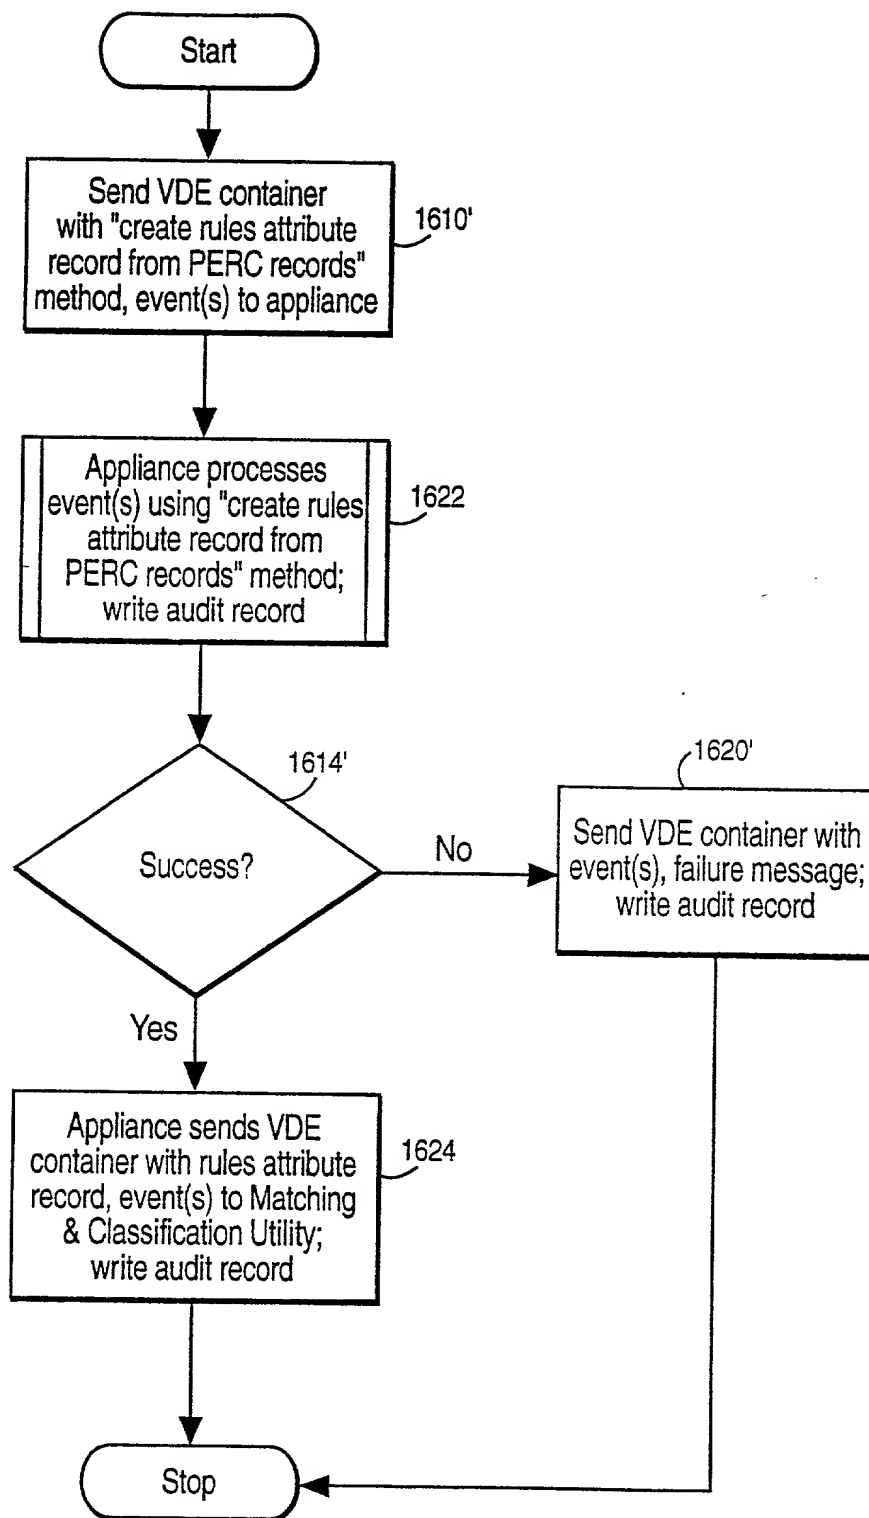


Fig. 34

Example Steps For Determining Attributes
Based On Available Rules And Consequences

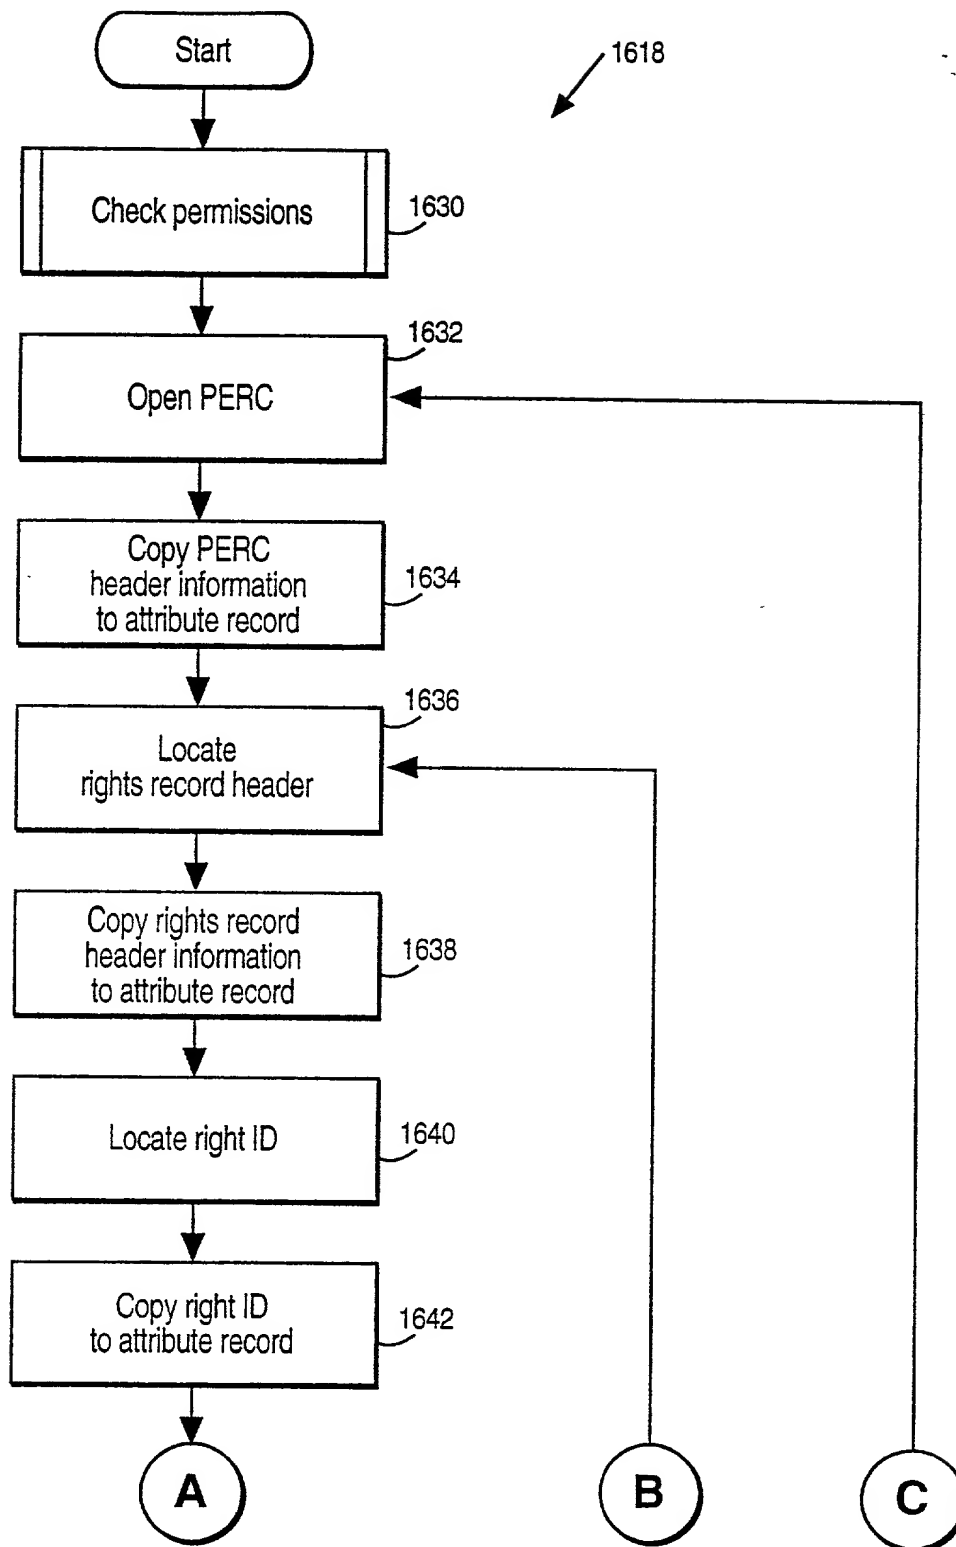


Fig. 35(A)

Construct Attribute Records From PERC Records Example Method

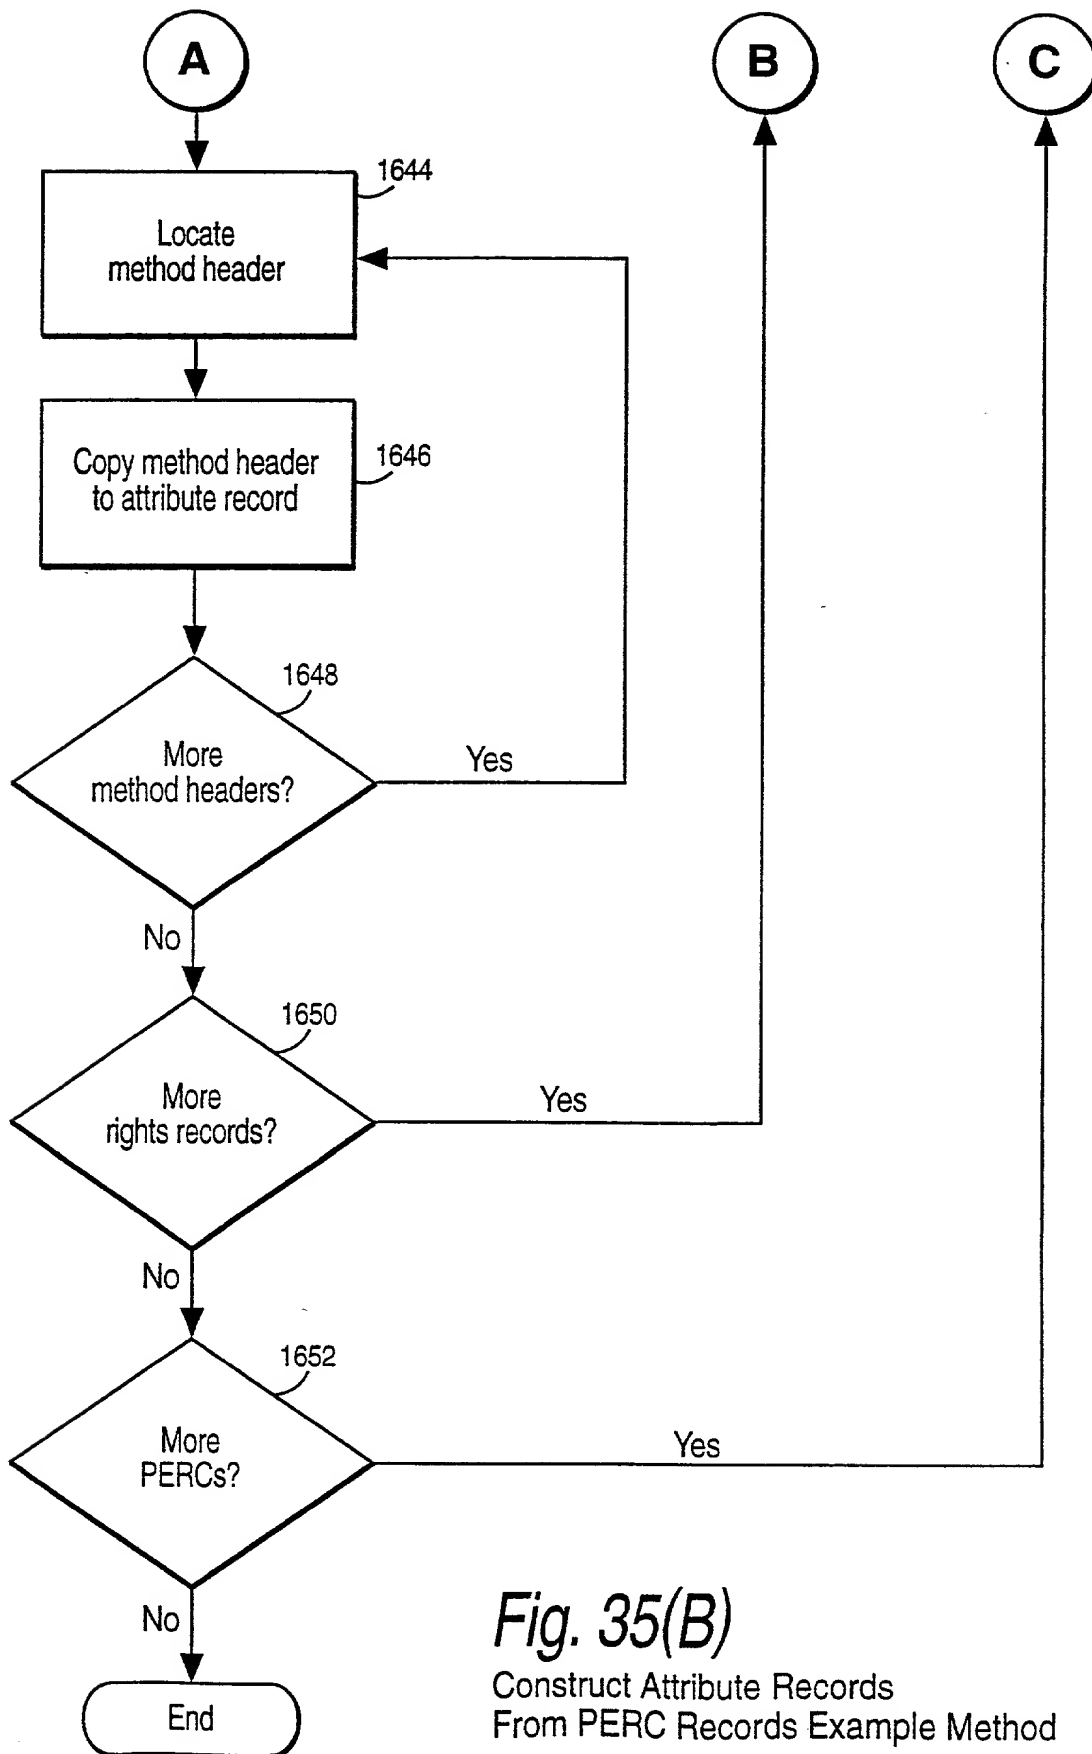


Fig. 35(B)
 Construct Attribute Records
 From PERC Records Example Method

```

graph TD
    Start([Start]) --> 1660[Locate PERC record]
    1660 --> 1662{Is there PERC for PERC}
    1662 -- No --> 1664[Report failure]
    1664 --> 1666[/Write audit record/]
    1666 --> 1668([End])
    1662 -- Yes --> 1670{PERC for PERC enable usage for Matching & Classification Utility}
    1670 -- No --> 1672[Report failure]
    1672 --> 1674[/Write audit record/]
    1674 --> 1676([End])
    1670 -- Yes --> 1678[Point to PERC for PERC]
    1678 --> End2([End])

```

Fig. 36

Check Permissions Record Example Steps

Fig. 37(A) Example Rights Attribute Record From PERCs

1680-1

User ID	Object ID	Attr1	Attr2	Attr3	Attr4	Attr5	Attr6	Attr7	Attr8	Attr9	Attr N
1682	1684	1686(1)										1686(N)

Fig. 37(B) Example Attribute Record

1680-2

User ID number	Object ID	Right ID	Method	Right ID	Method	Right ID	Method	Right ID	Method	Right ID	Method
1682	1684	1686A	1686B	1686C	1686D	1686E	1686F	1686G	1686H	1686I	1686J	
CF129CD5	1227-33-1298-2	Use	Open	Meter	Each time	Budget	One time purchase	\$1.00	Bill	VISA	AMEX	

Fig. 37(C) Example Attribute Records From PERC Record

1680-3

User ID number	Object ID	Right ID	Method	Right ID	Method	Right ID	Method	Right ID	Method	Right ID	Method
1682	1684	1686A	1686B	1686C	1686D	1686E	1686F	1686G	1686H	1686I	1686J	
CF129CD5	1227-33-1298-2	27	239	15	546	81	423	1.00	02	666	601	

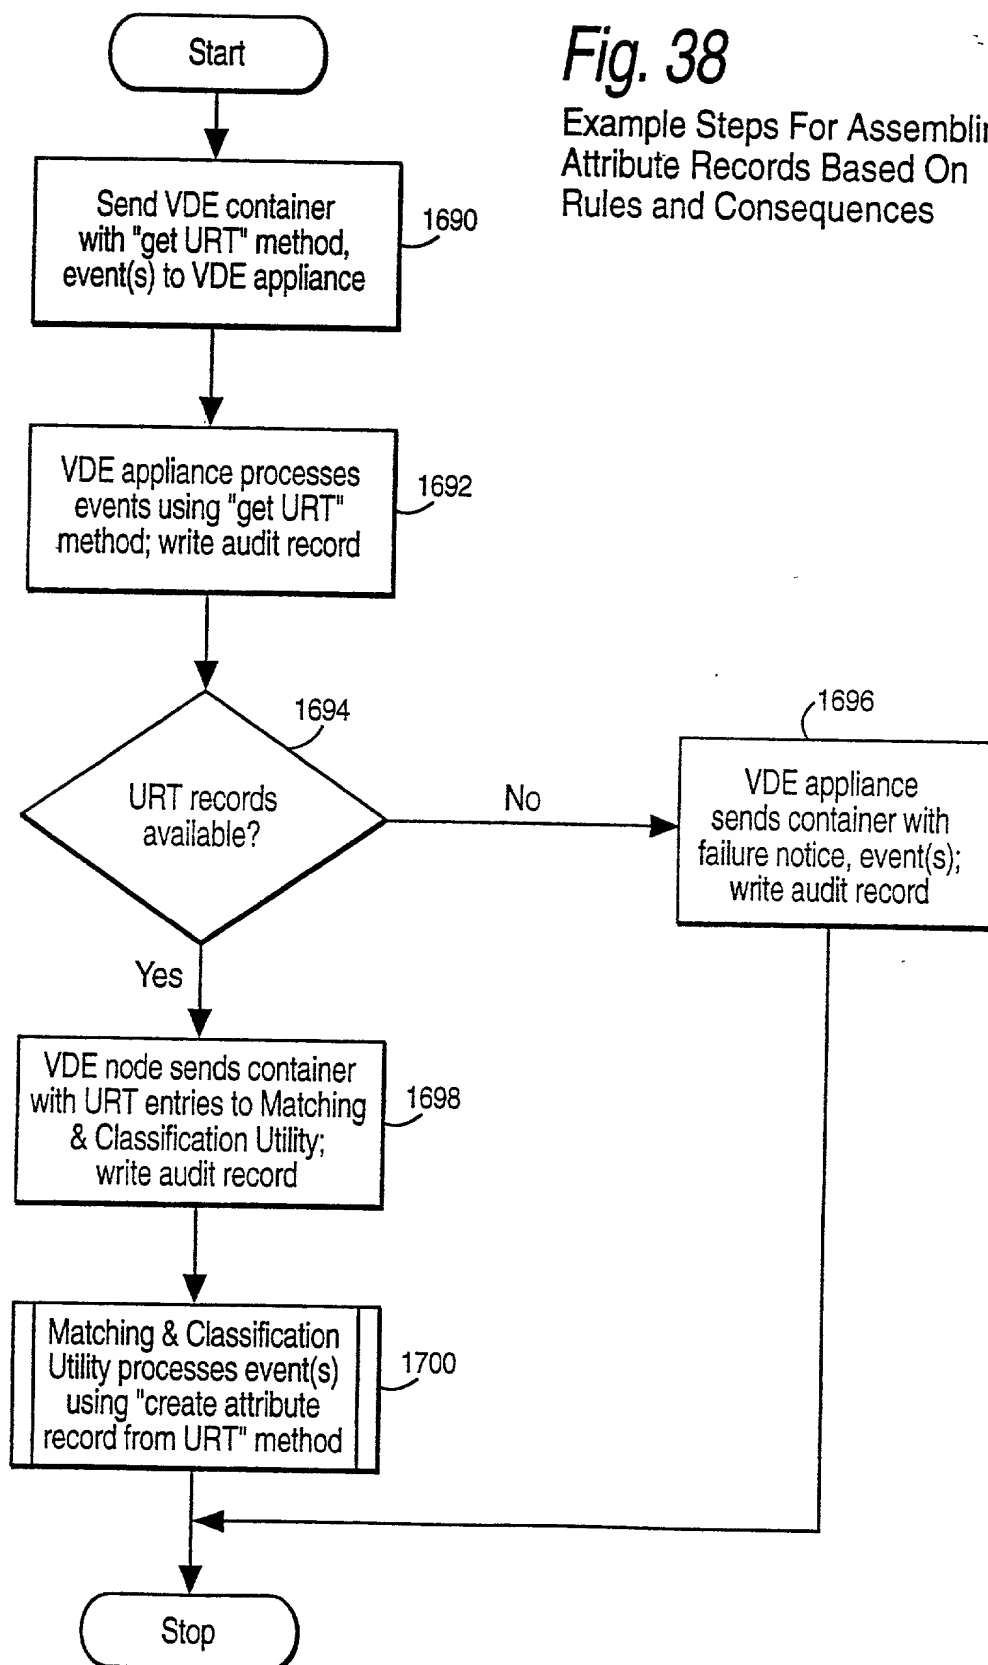


Fig. 38

Example Steps For Assembling Attribute Records Based On Rules and Consequences

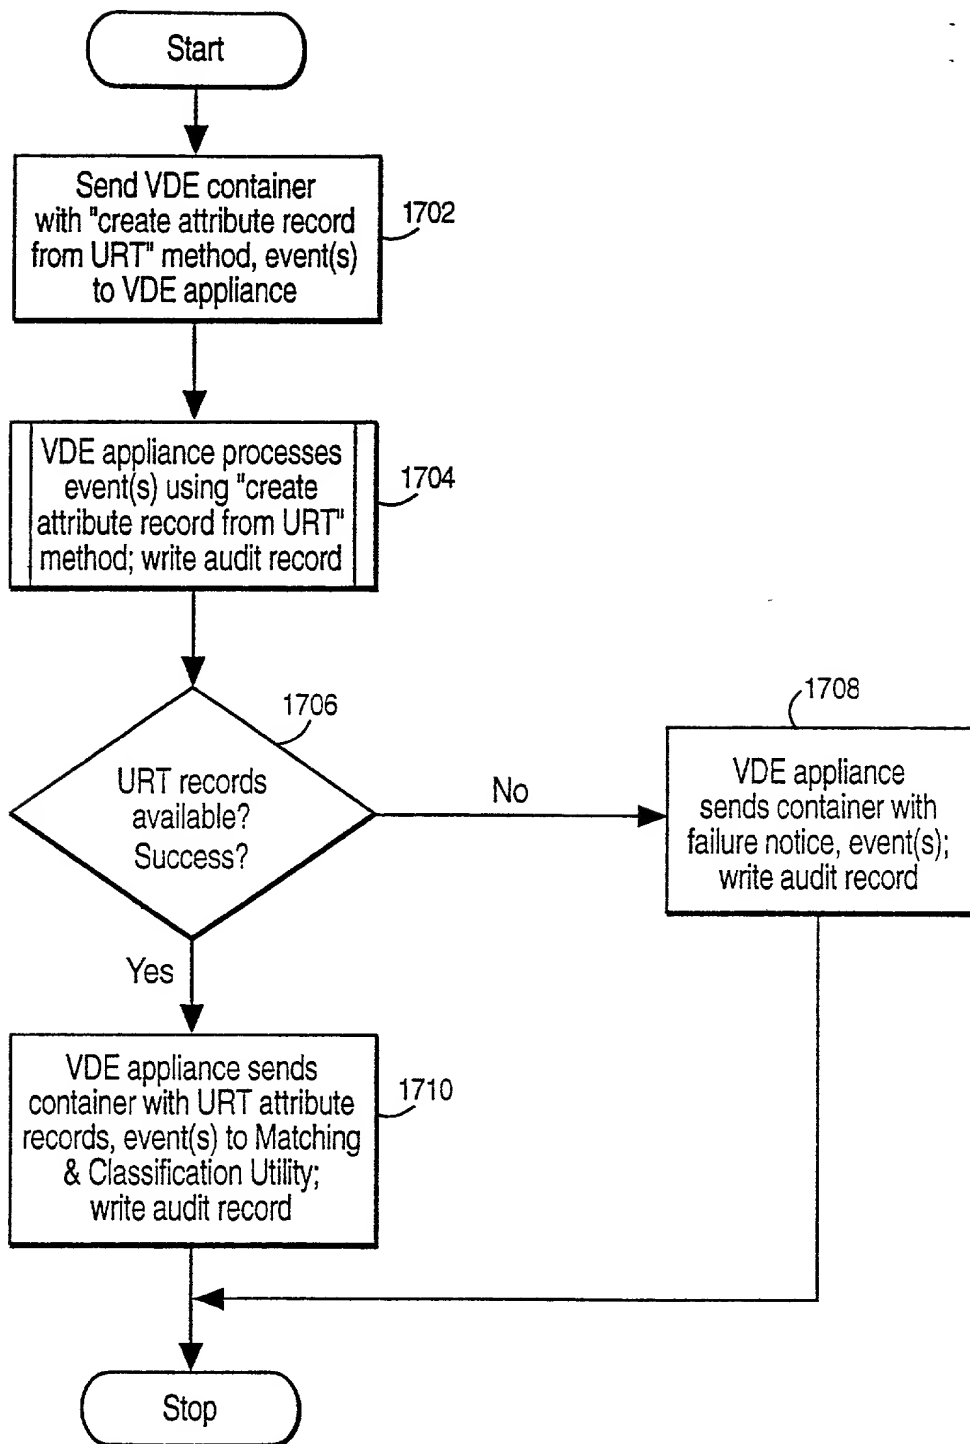


Fig. 39

Example Steps For Assembling Attribute Records
Based On Rules and Consequences

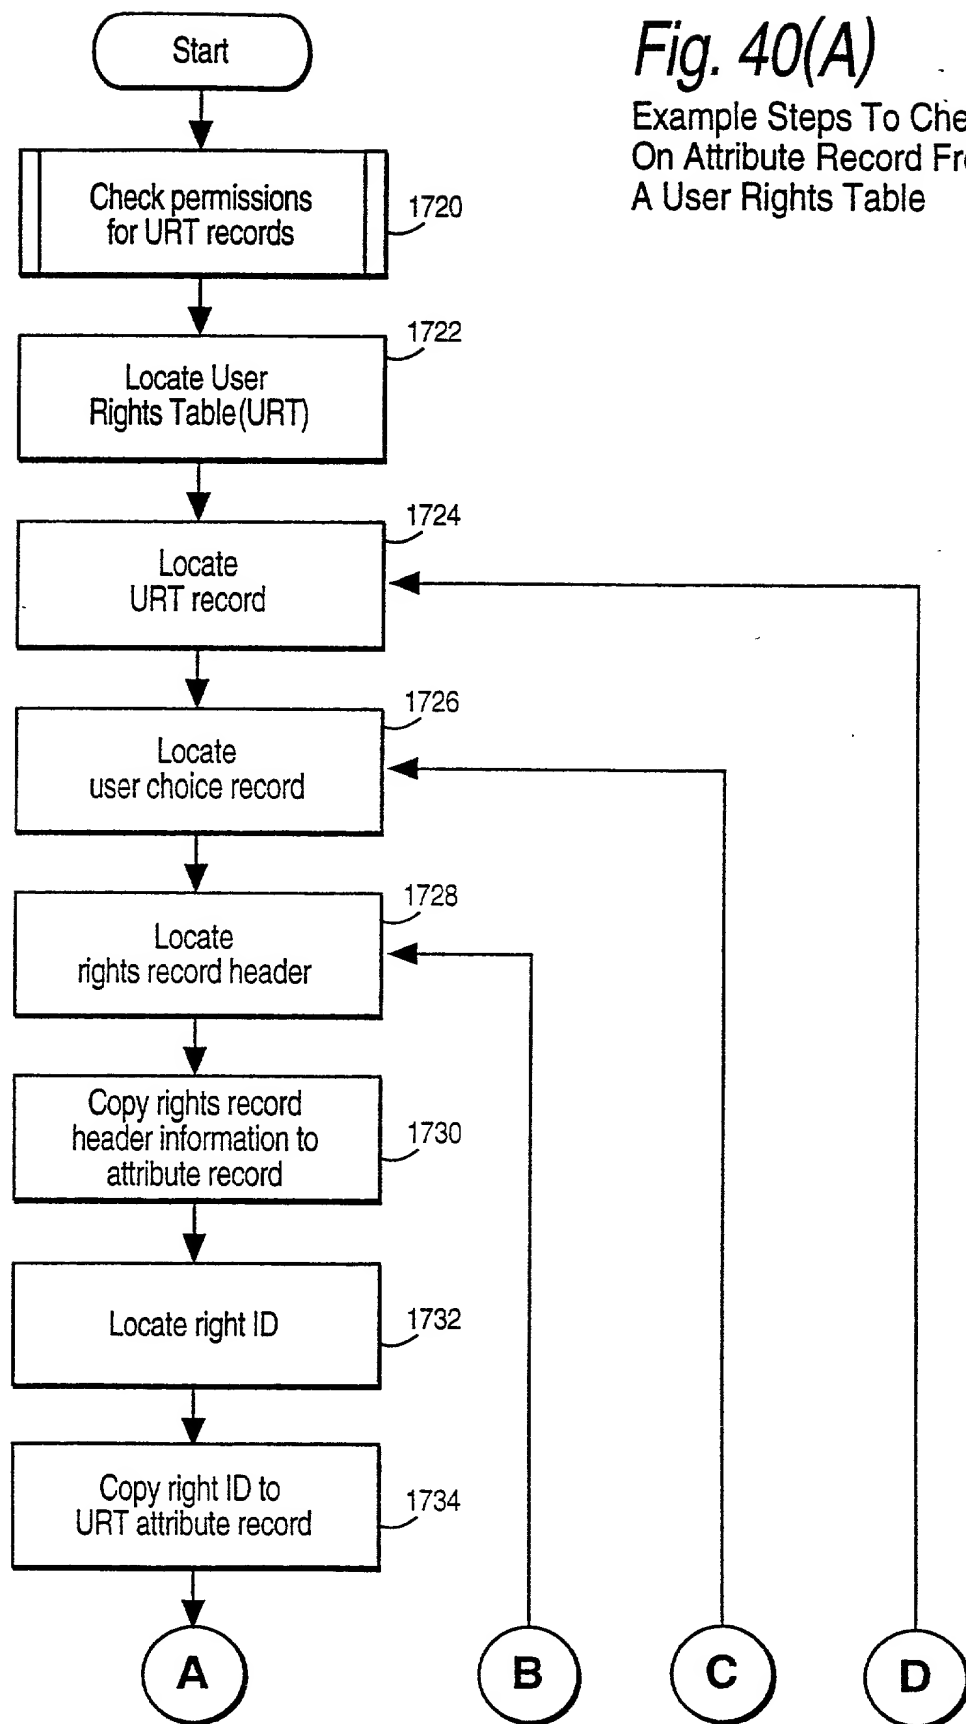


Fig. 40(A)

Example Steps To Check
On Attribute Record From
A User Rights Table

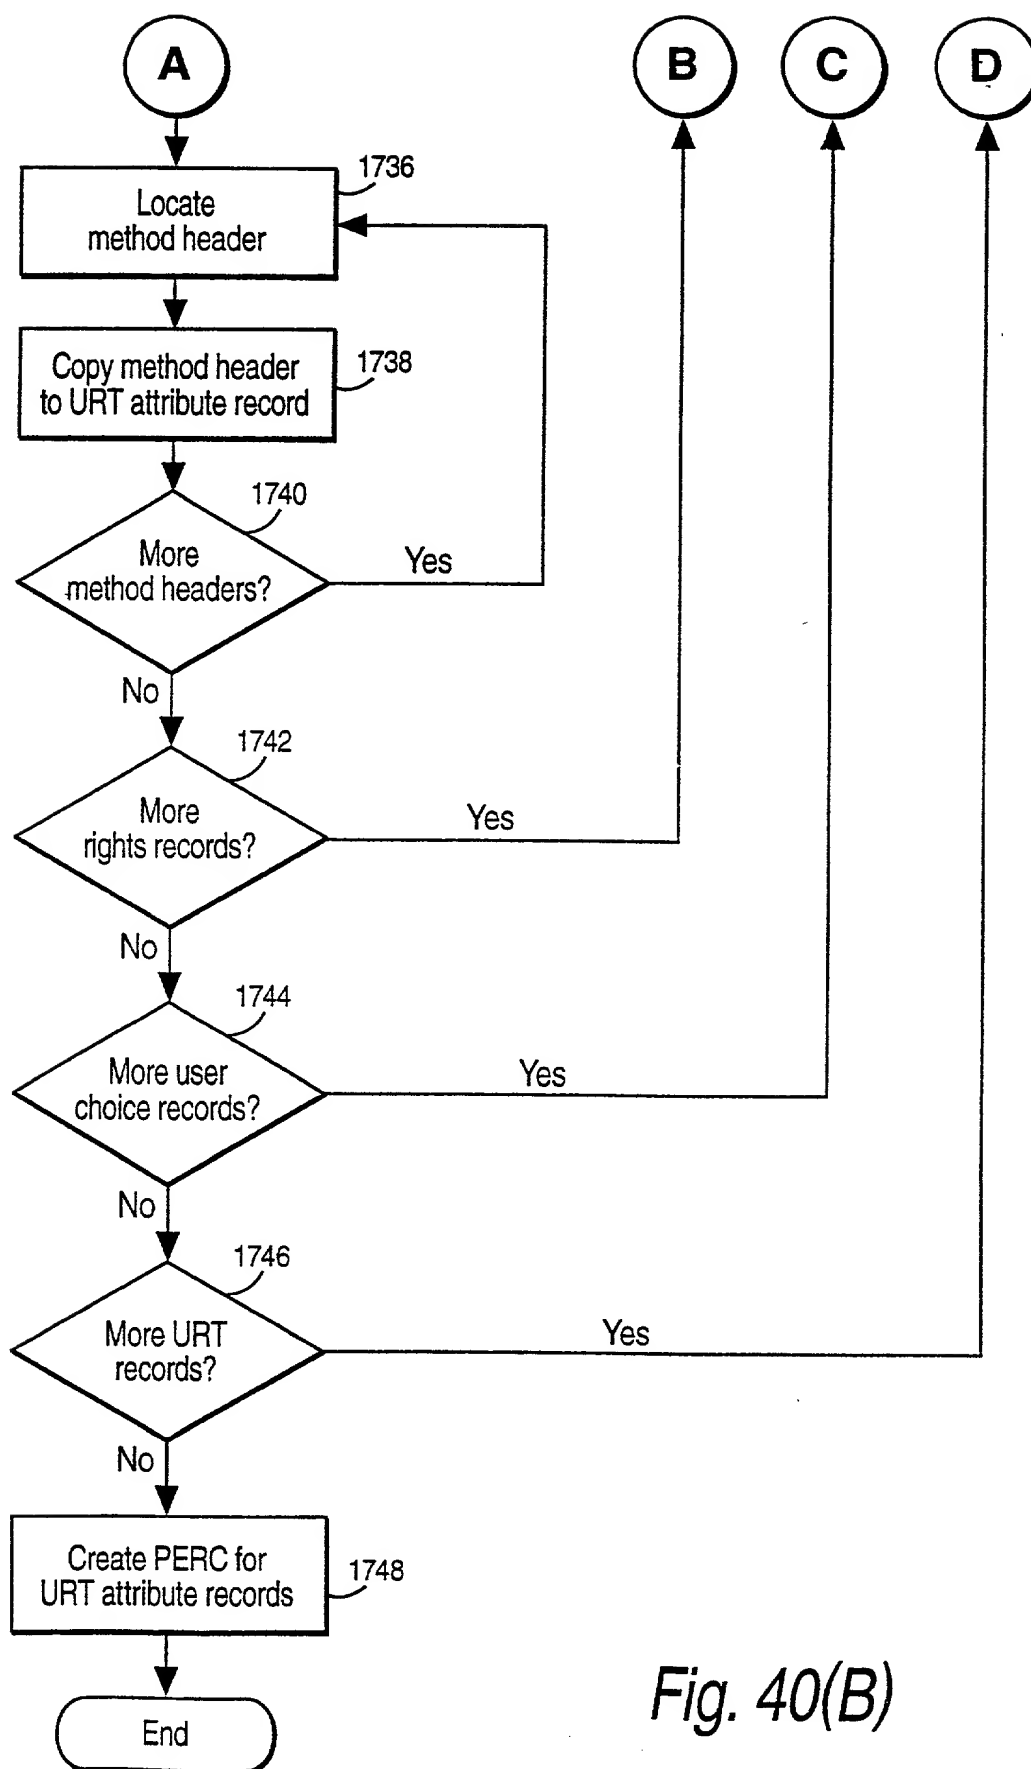


Fig. 40(B)

Fig. 41

Contract attribute records from
PERC records method example

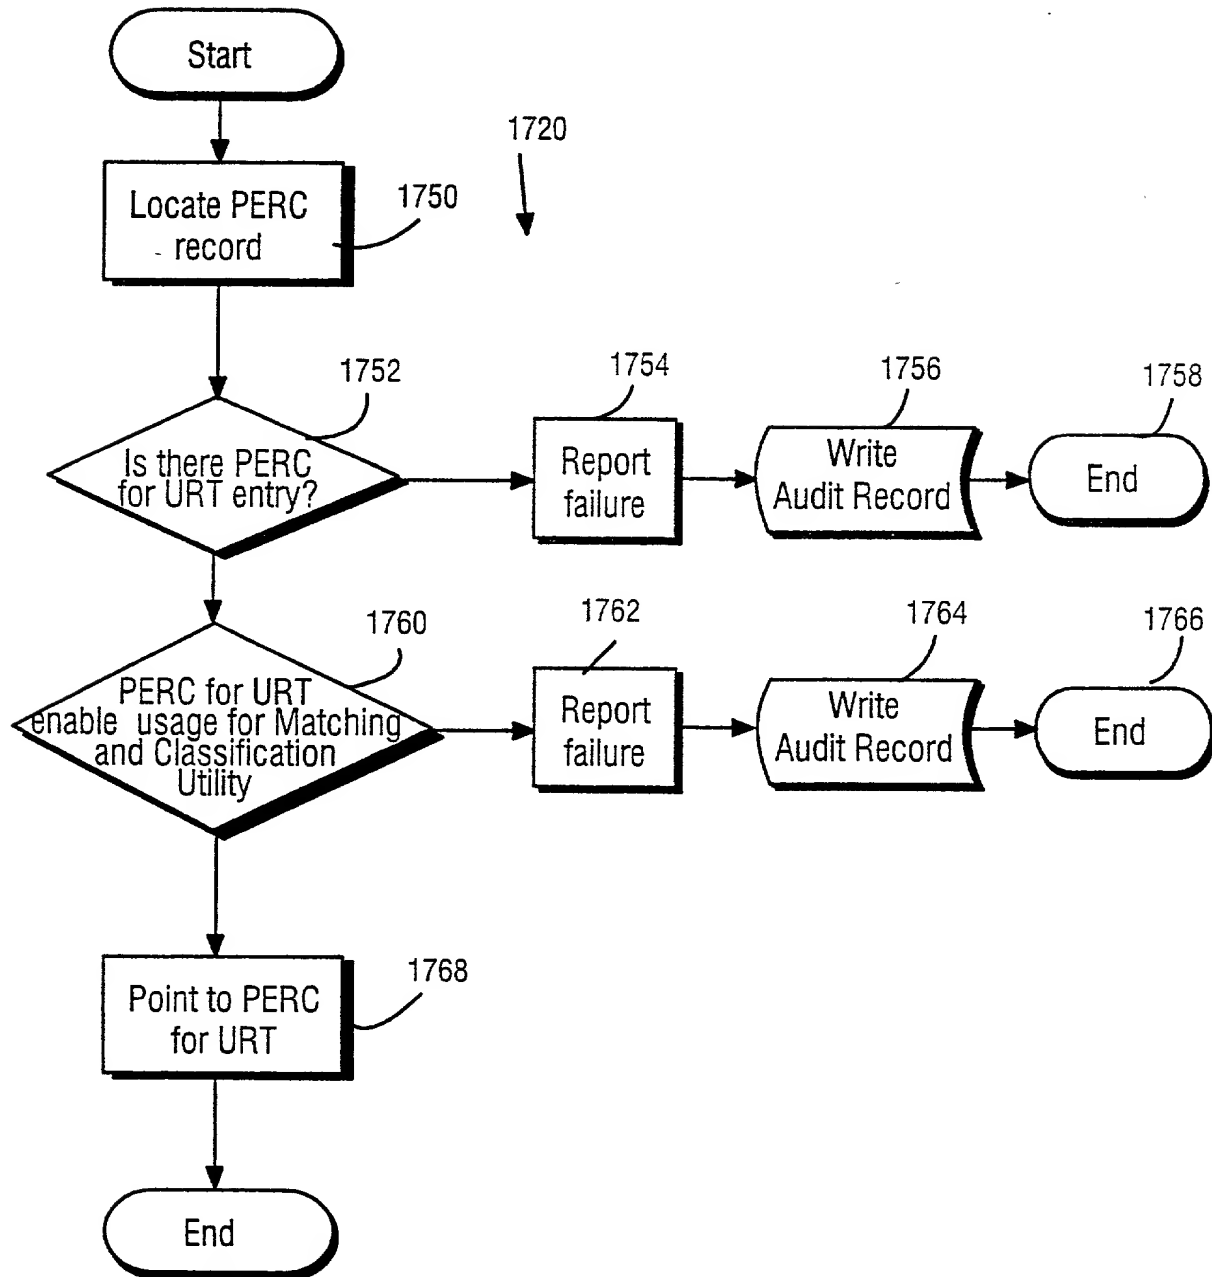


Fig. 42(A) Example Rights Attribute Record From URT

1770-1

User ID	Object ID	Attr1	Attr2	Attr3	Attr4	Attr5	Attr6	Attr7	Attr8	Attr9	Attr N
1772	1774	1776(1)										1776(N)

Fig. 42(B) Example Rights Attribute Record From URT

User ID number	Object ID	Right ID	Method	Right ID	Method	Right ID	Method	Right ID	Method	...
CF129CD5	1227-33-1298-2	Use	Open	Meter	Each time	Budget	One time purchase	\$1.00	Bill	VISA

1770-2

1772

1774

1776A

1776B

1776C

1776D

1776E

1776F

1776G

1776H

1776I

Fig. 42(C) Example User Choice Attribute Records (From URT)

1770-3

User ID number	Object ID	Right ID	Method	Right ID	Method	Right ID	Method	Right ID	Method							
1772	1774	1776A	27	1776B	239	1776D	15	1776E	81	1776F	423	1776G	1.00	1776H	02	1776I	666

Fig. 43

Example steps for assembling
usage audit records

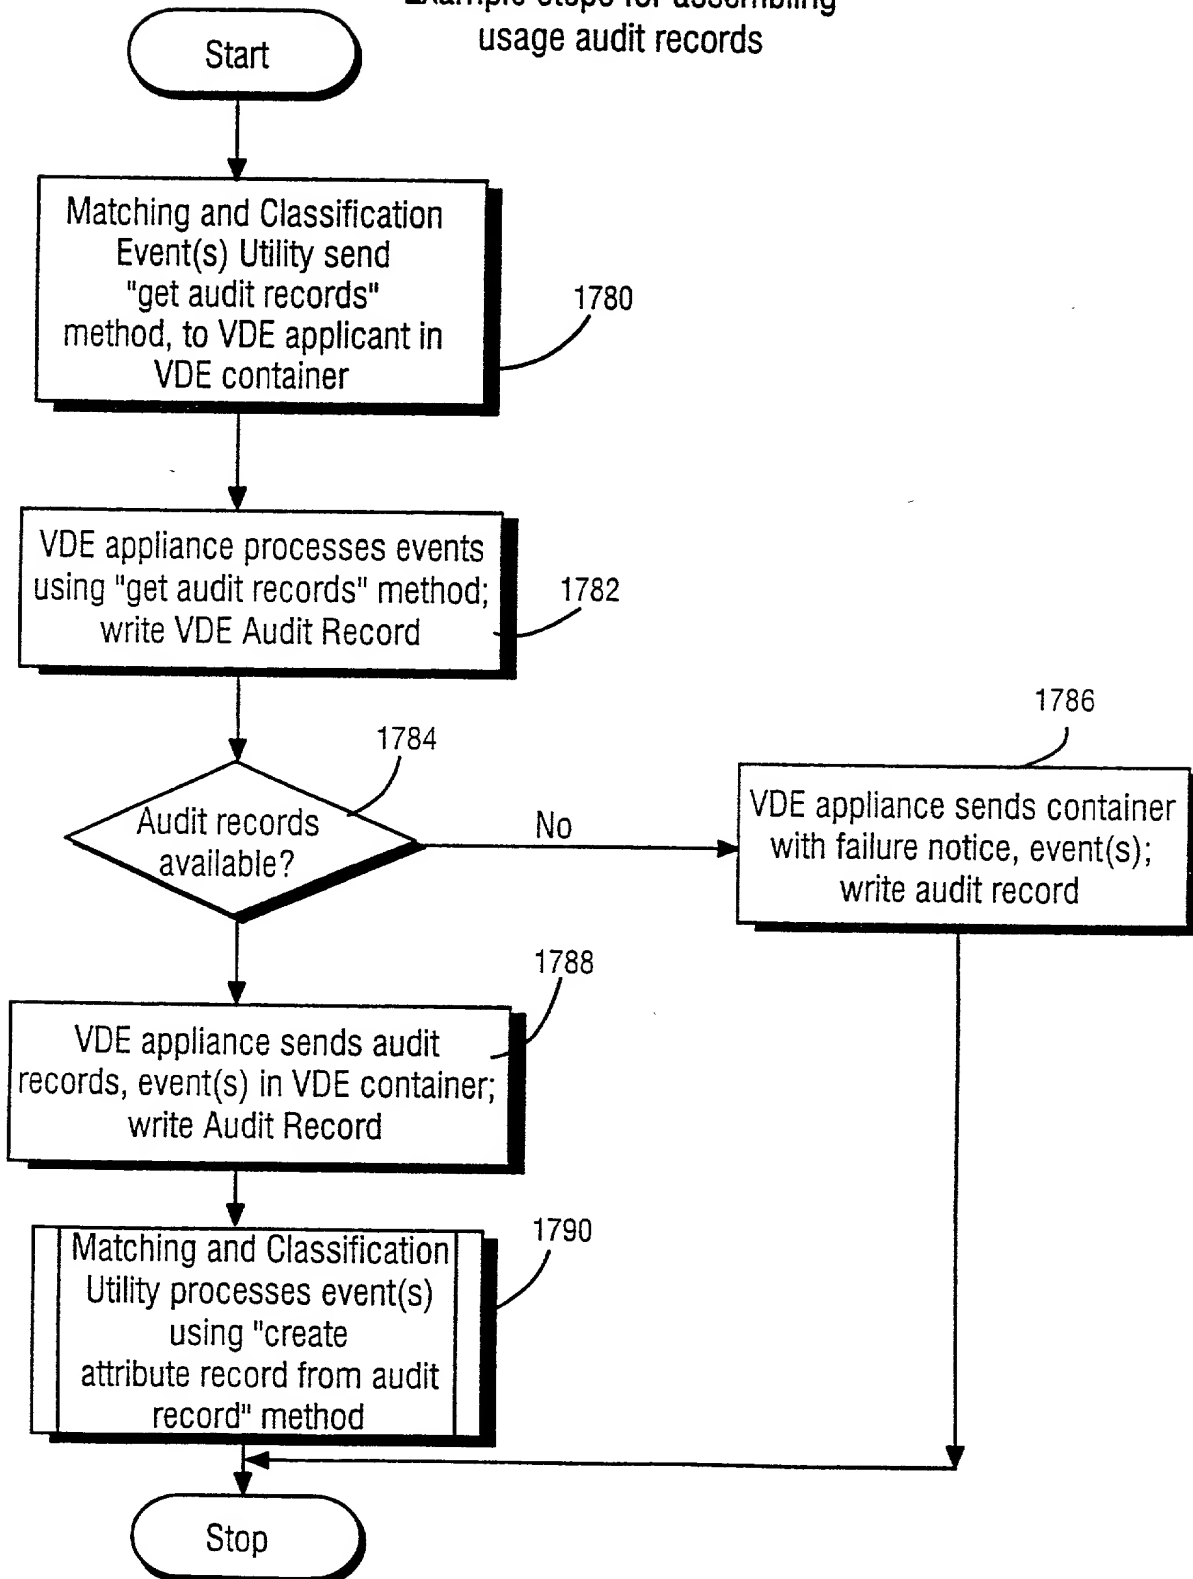


Fig. 44
Example steps for assembling usage
audit records

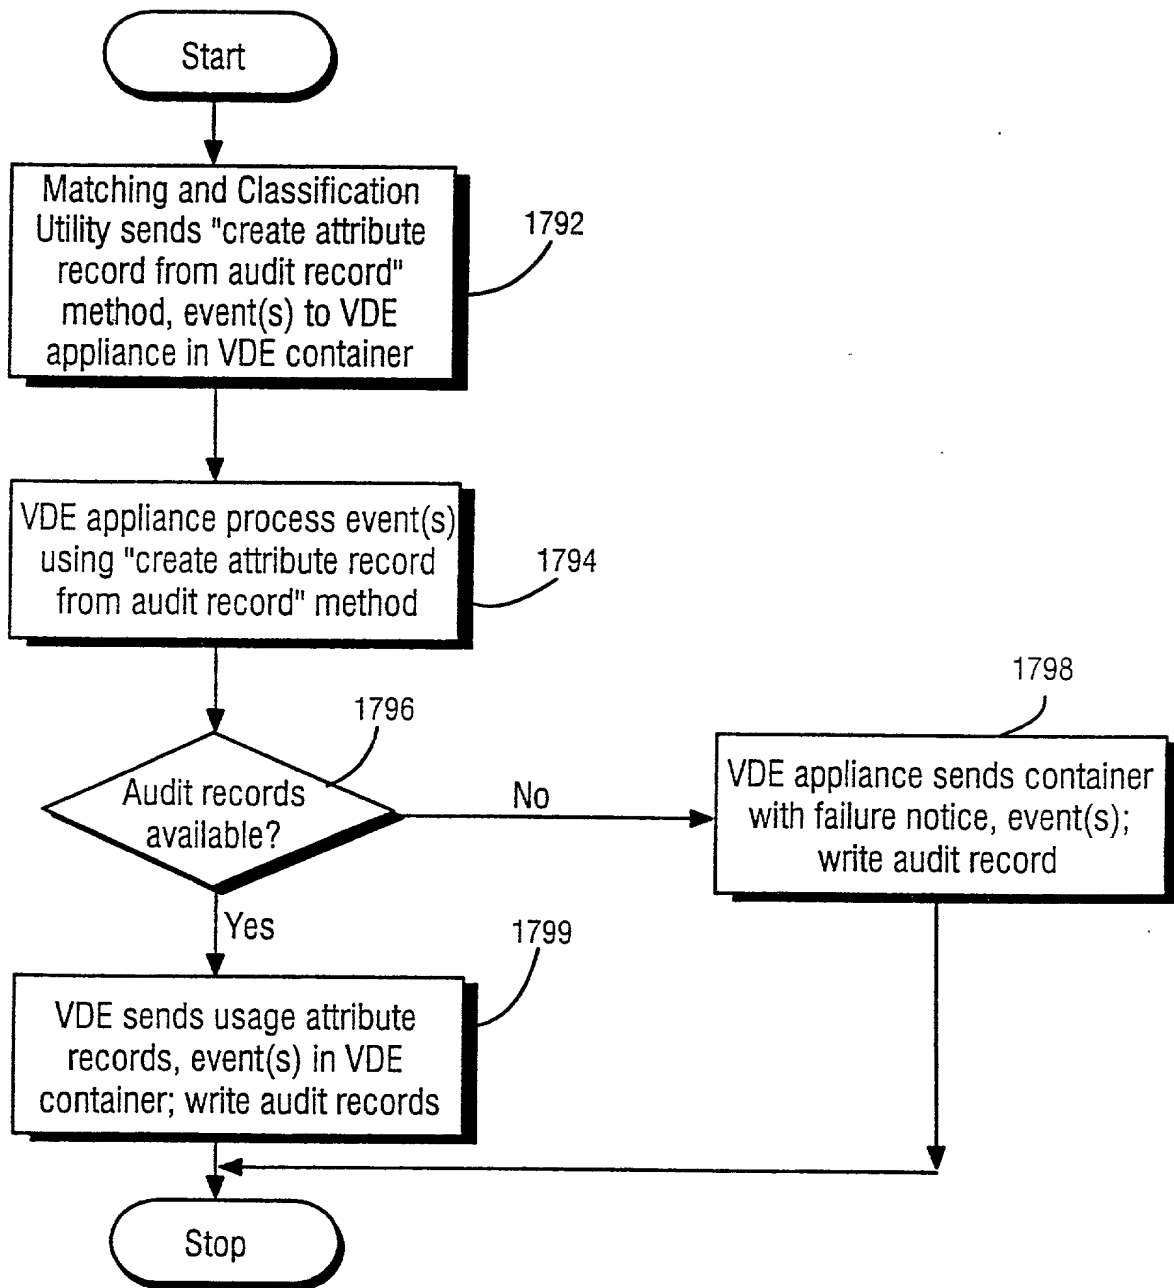


Fig. 45(A)
Example steps to create audit
attribute records



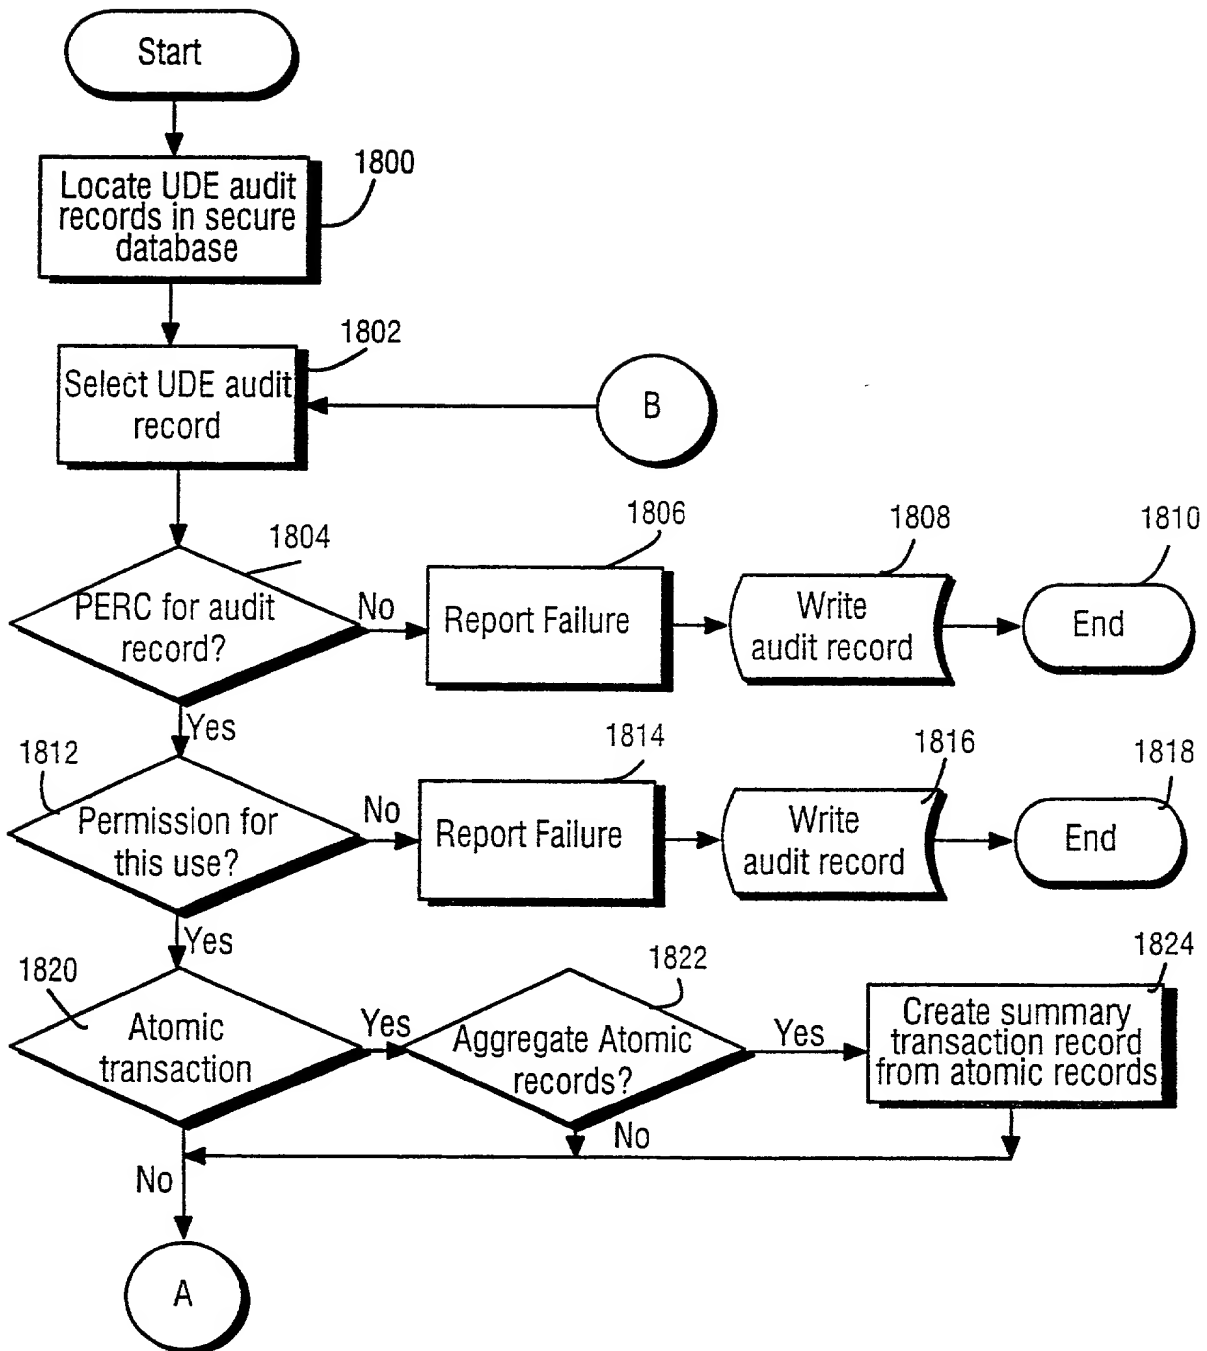


Fig. 45(B)
Example steps to create audit
attribute records

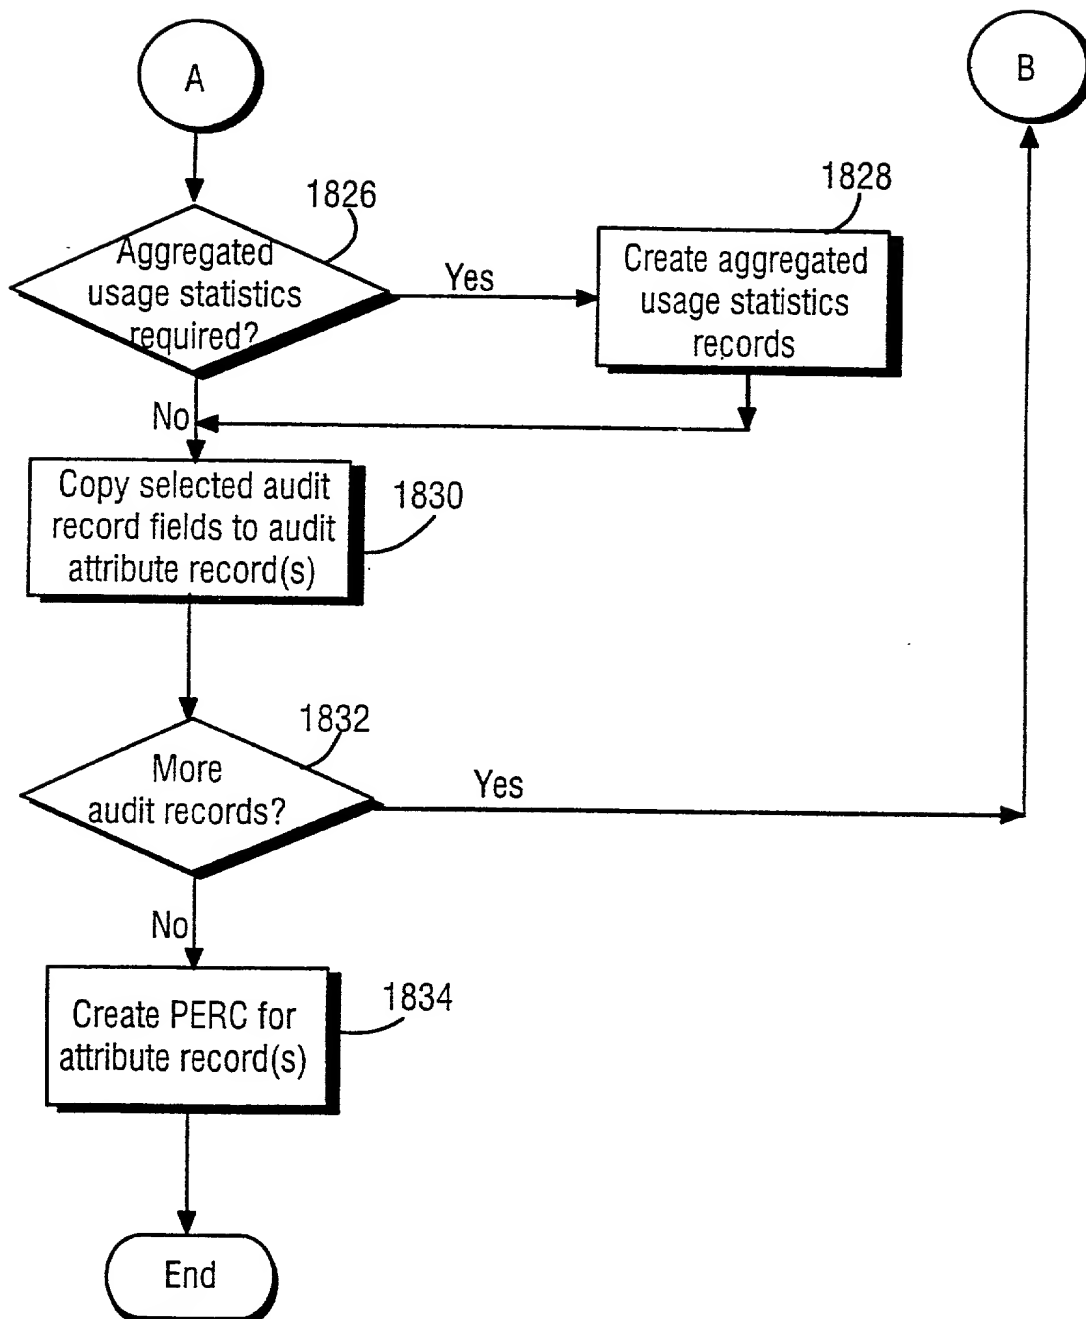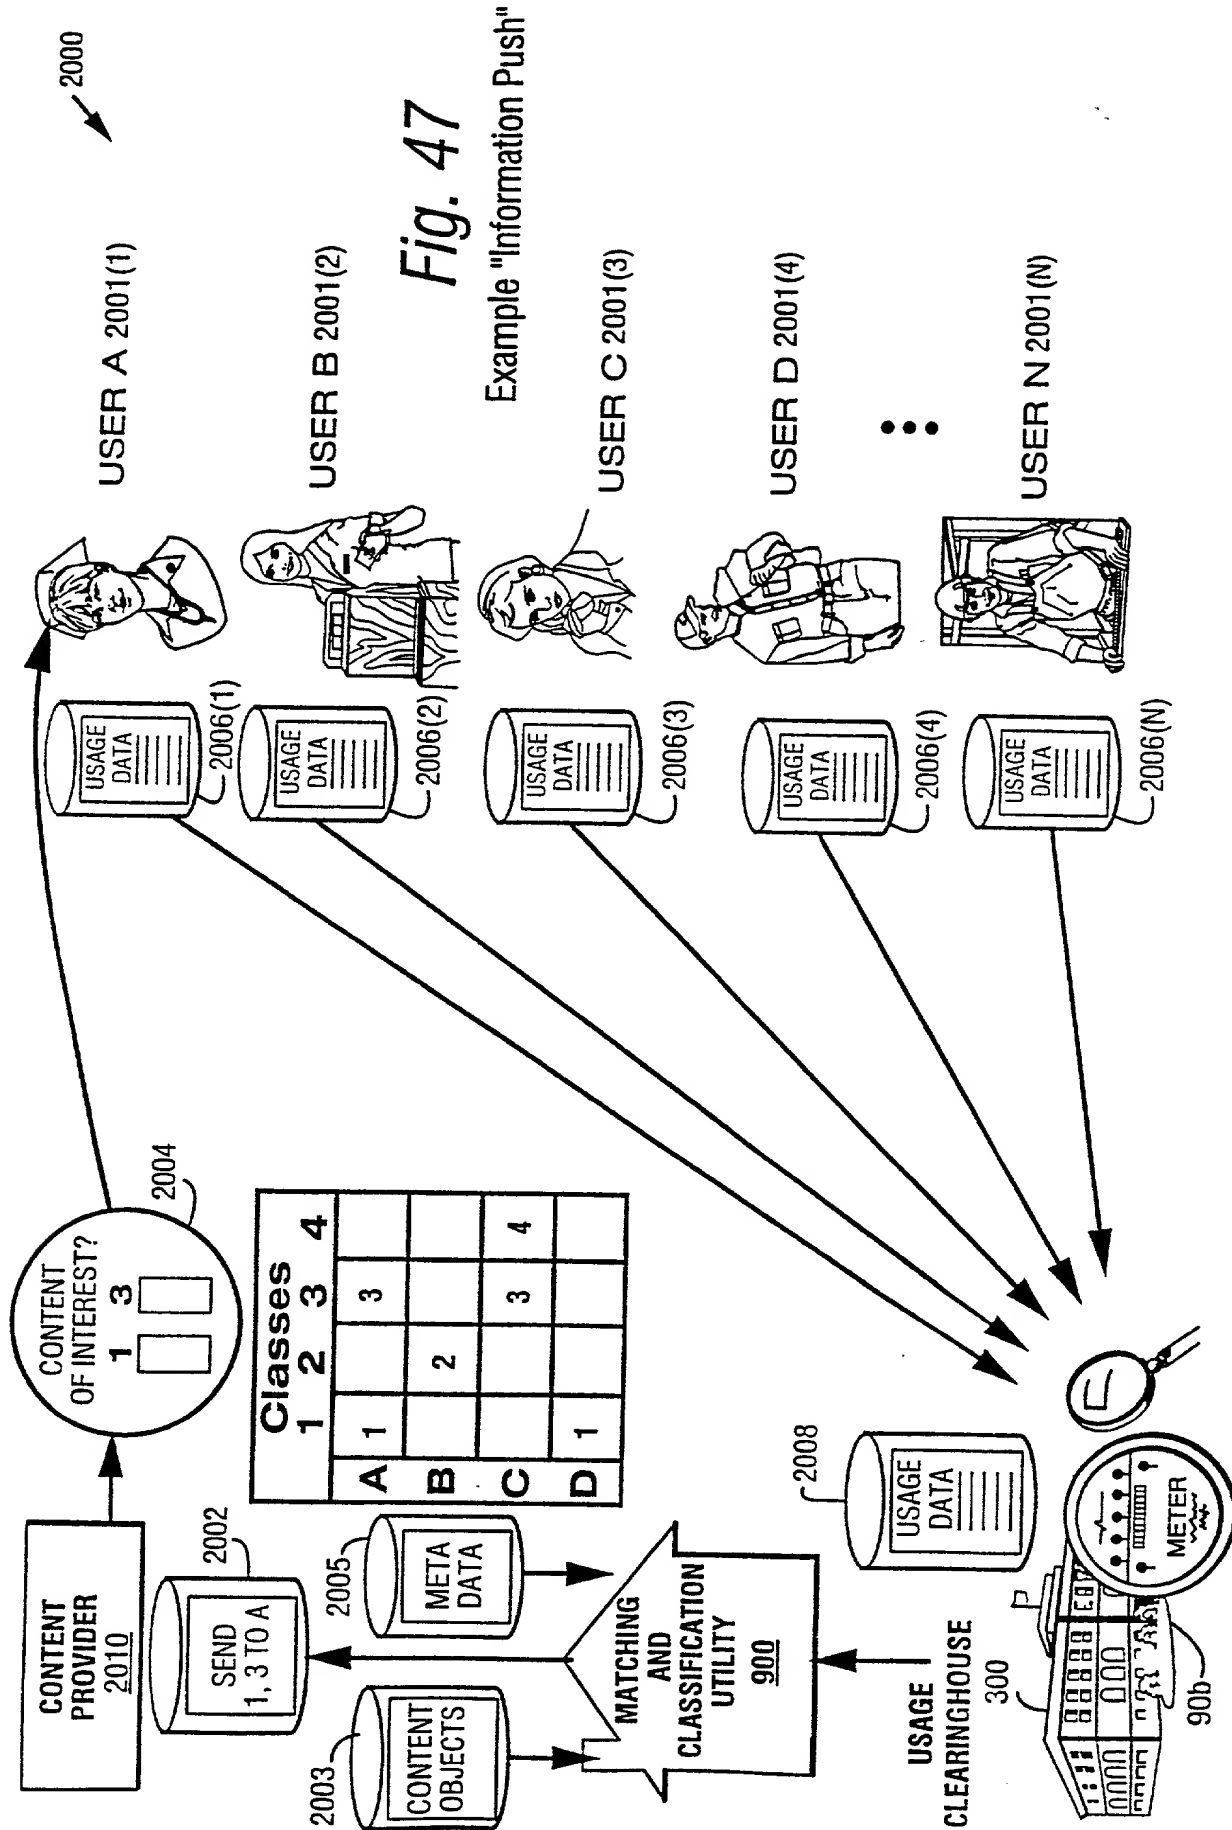

004020 0926460



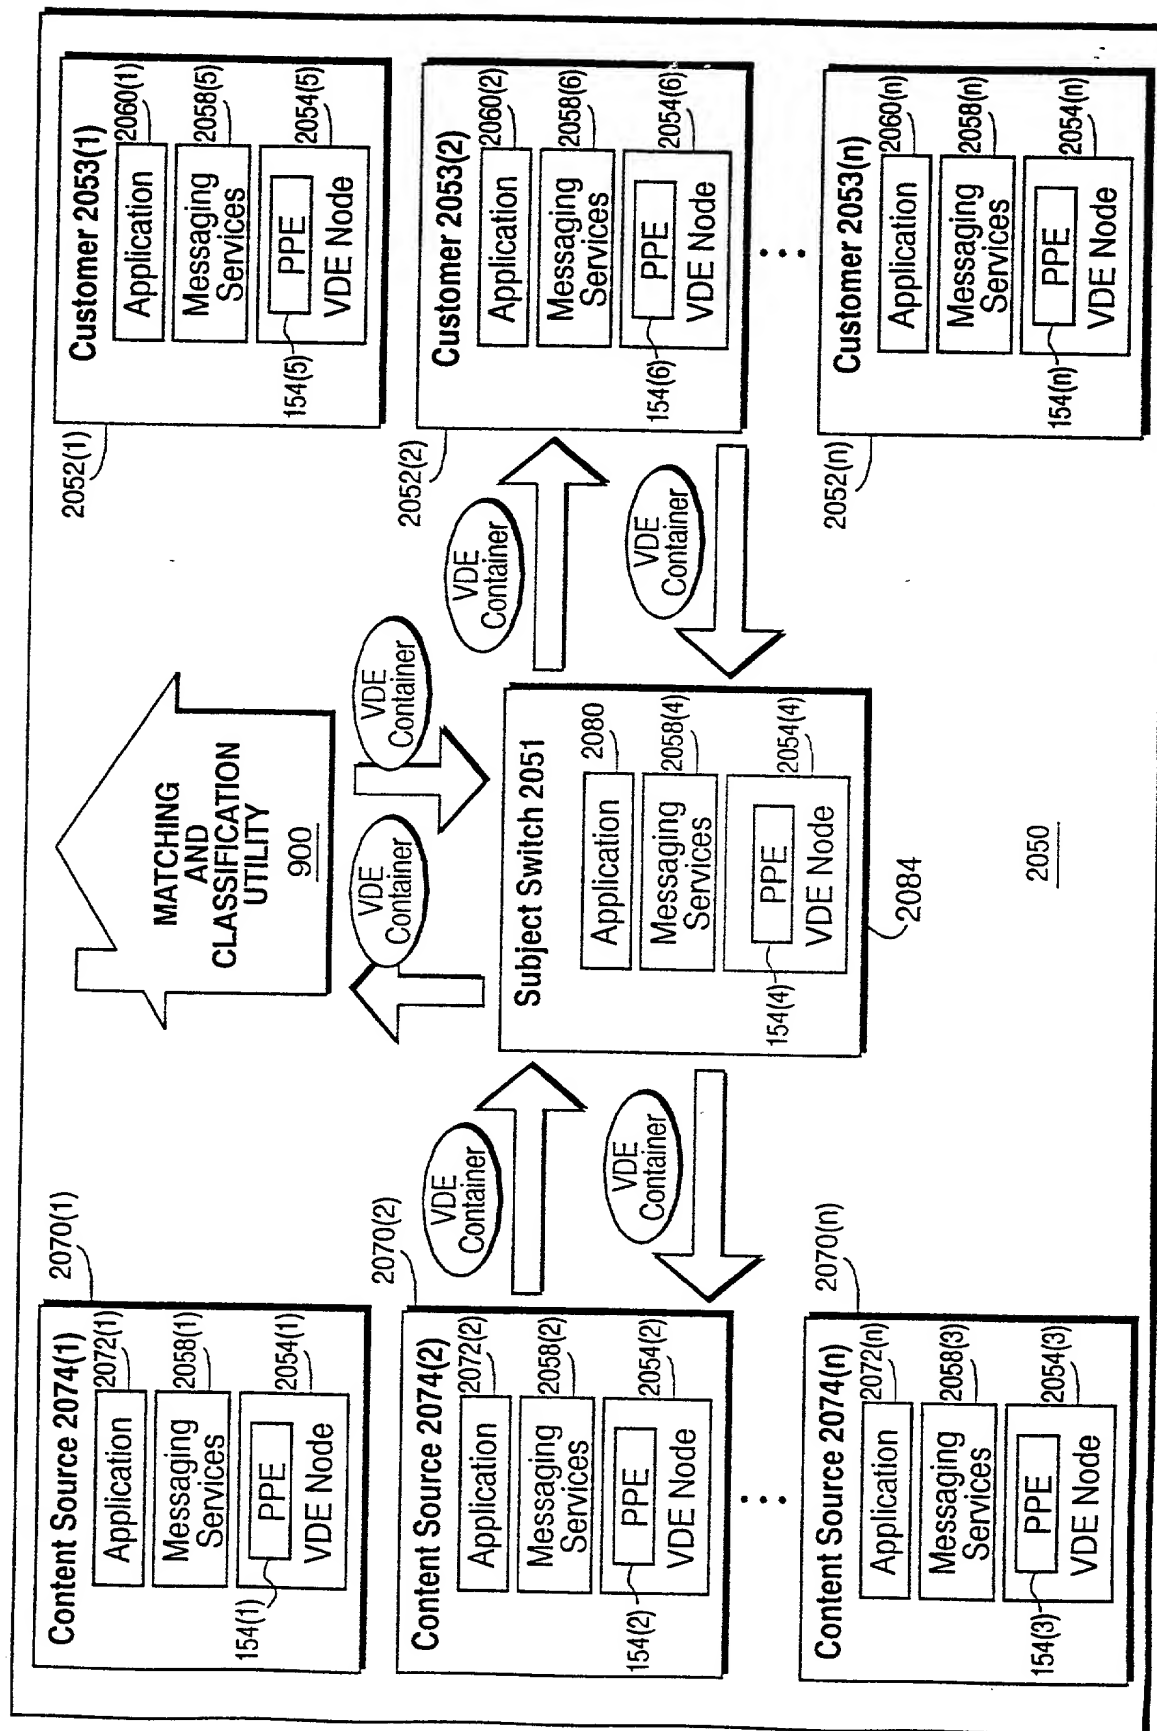
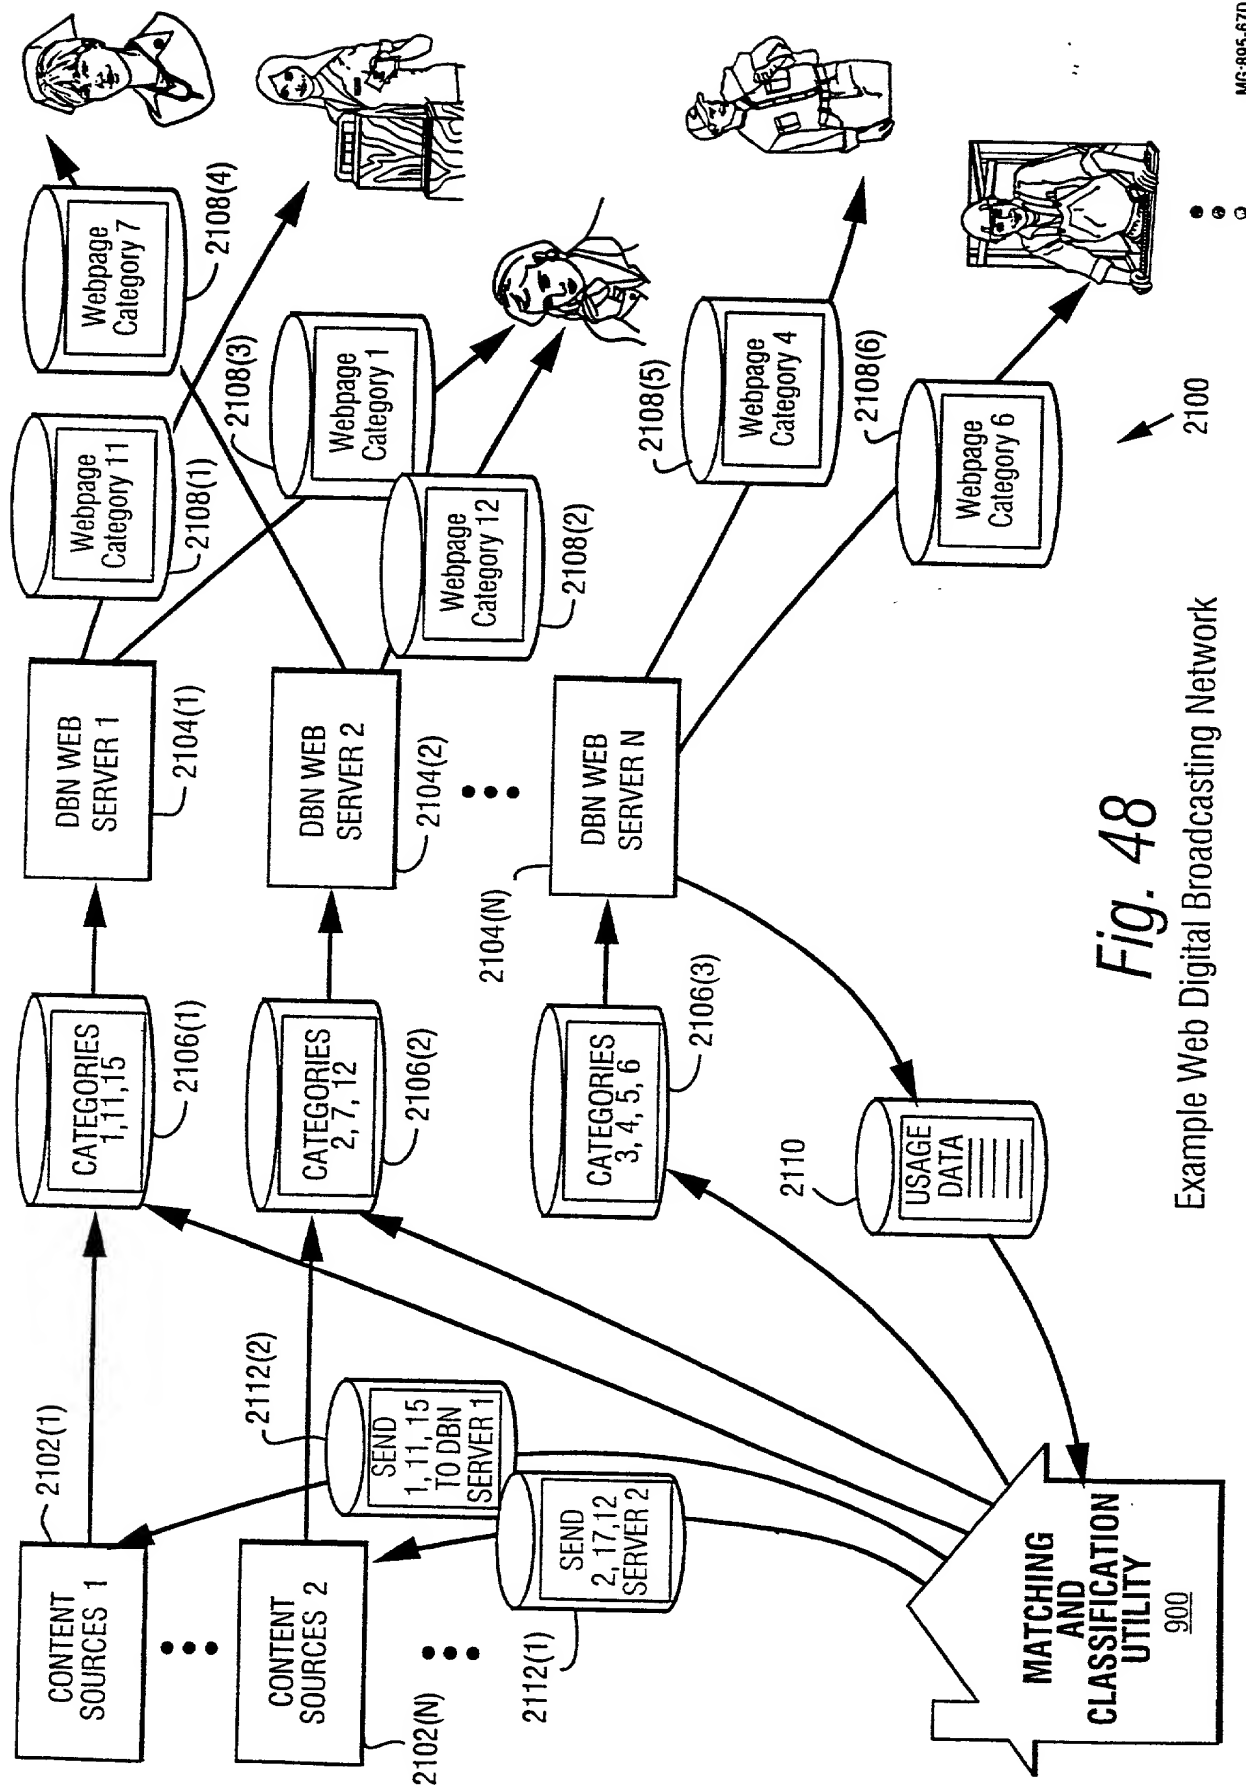


Fig. 47(A) Matching and Classification Utility 900 Supports "Push" models using Subject Switching and Messaging Services



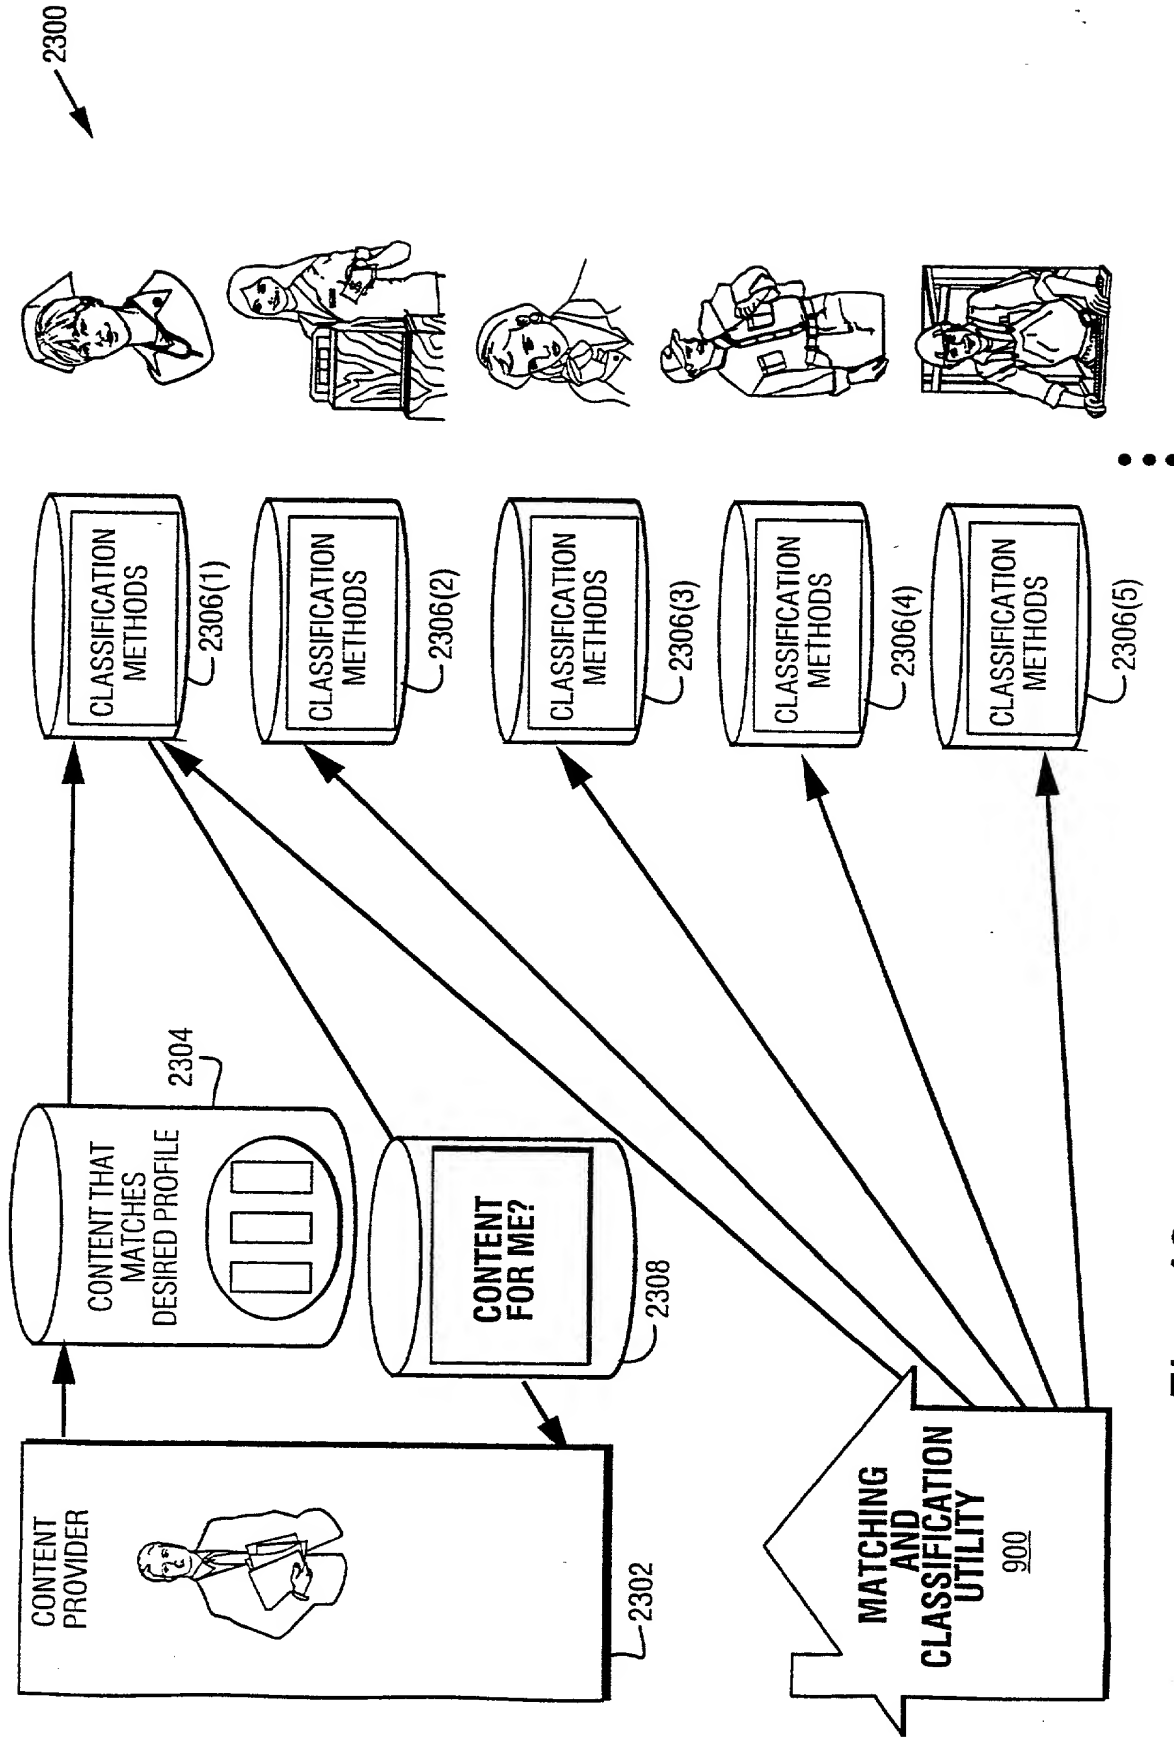


Fig. 49 Example "Consumer Pull"

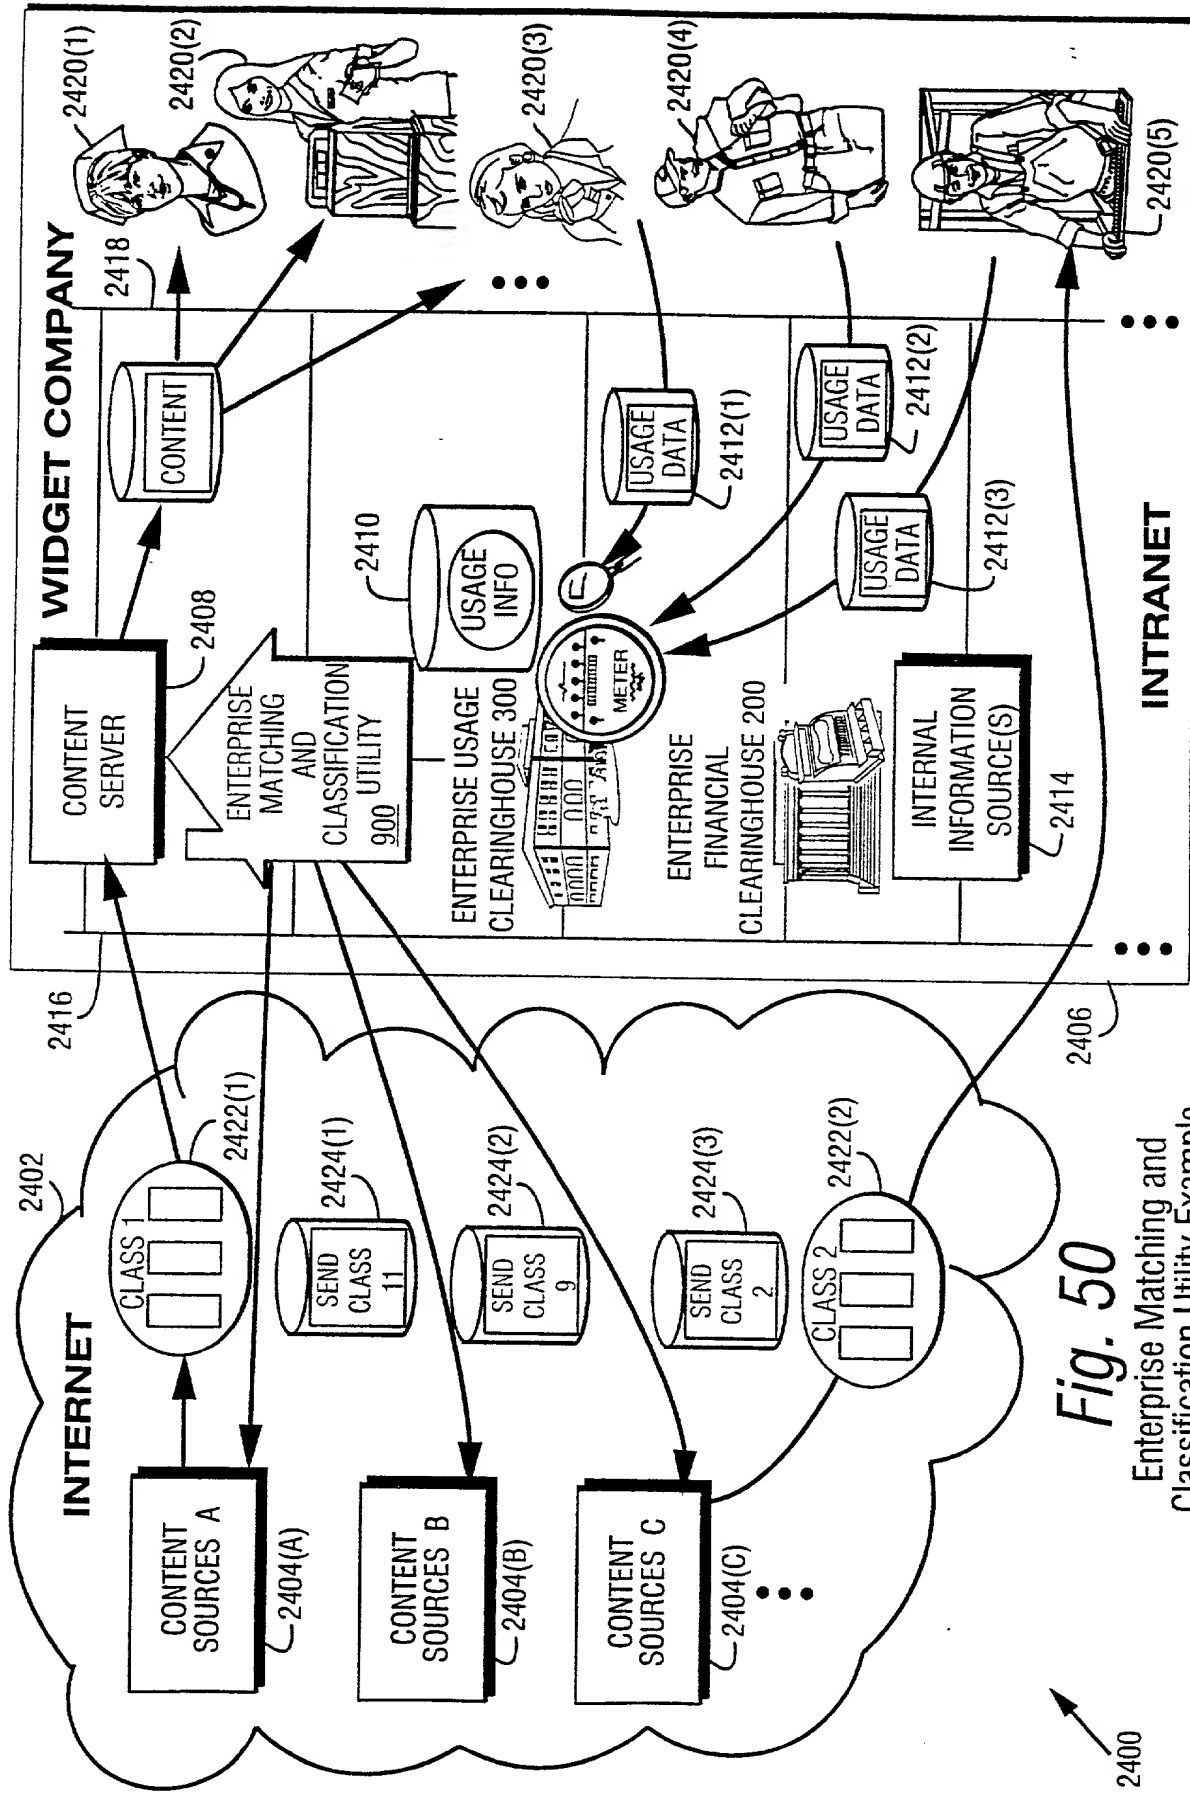


Fig. 50
Enterprise Matching and
Classification Utility Example

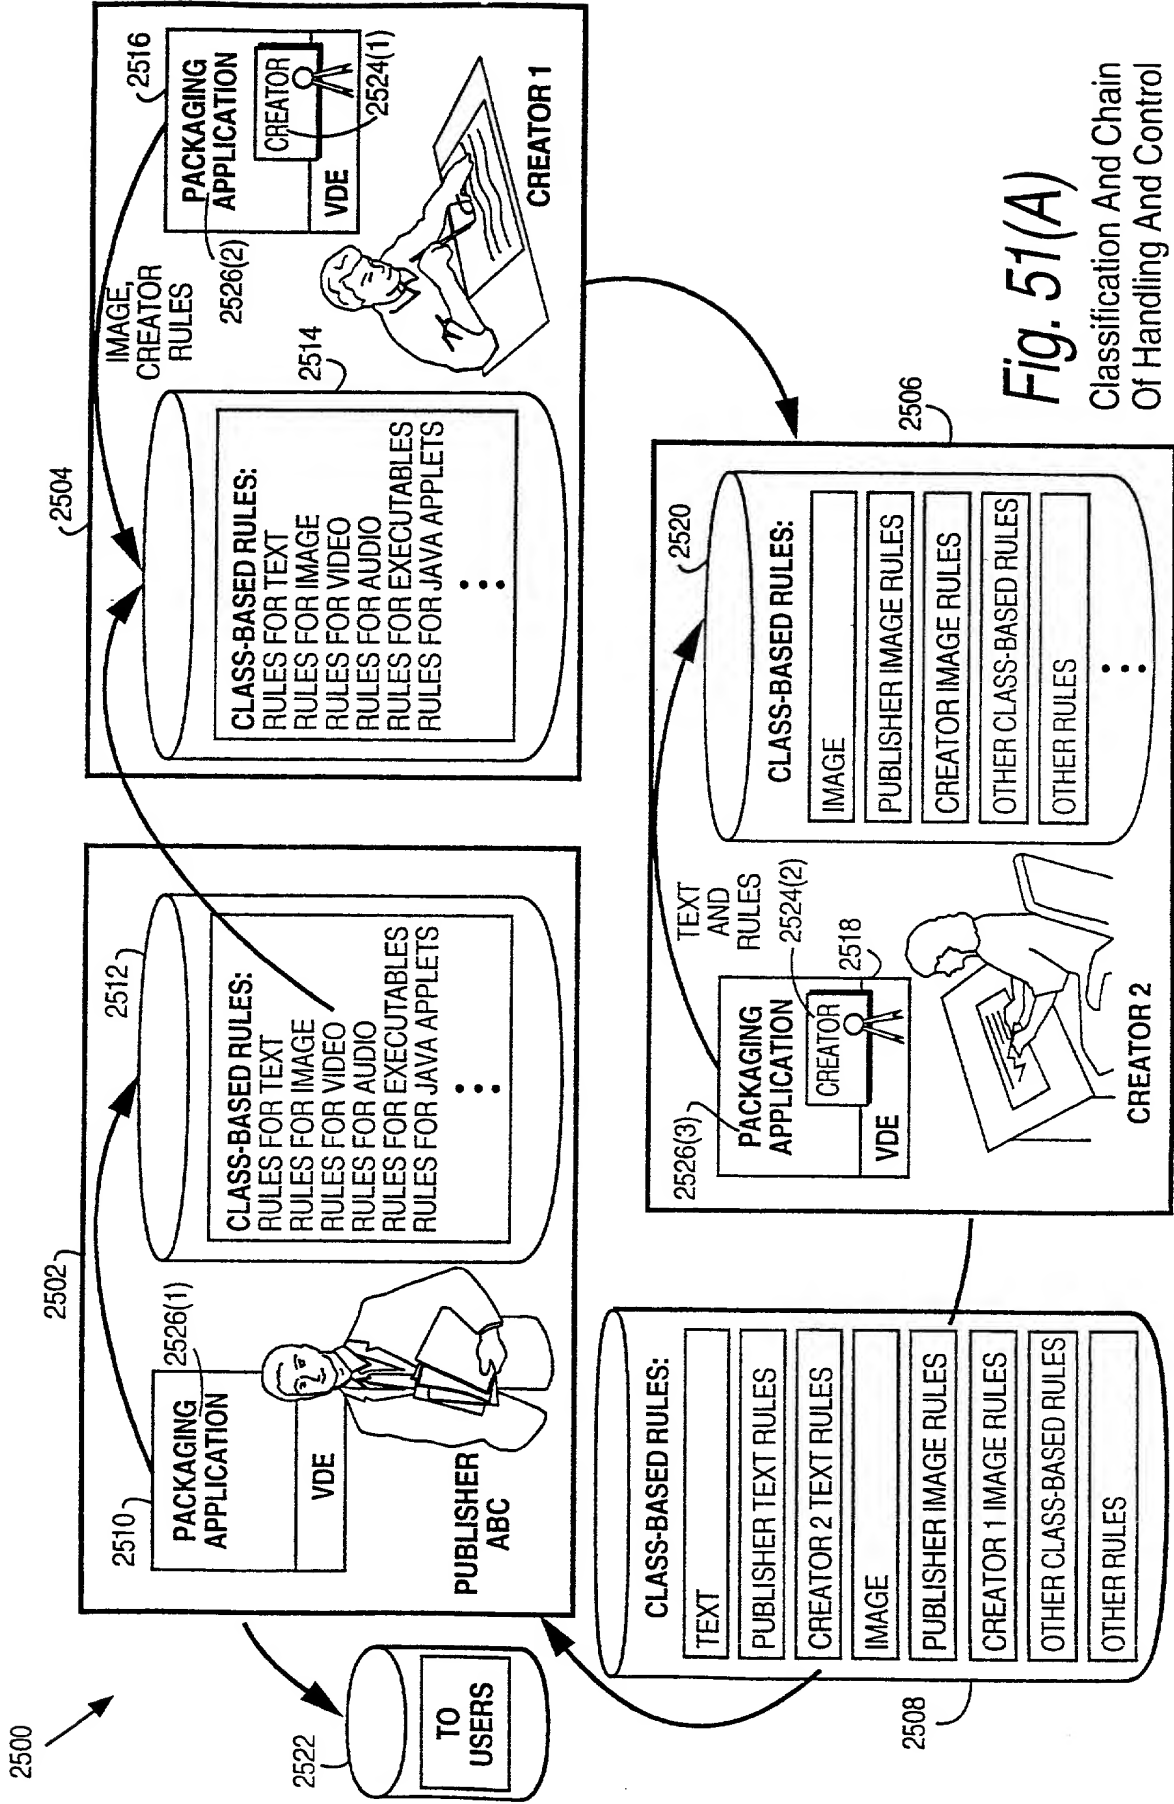
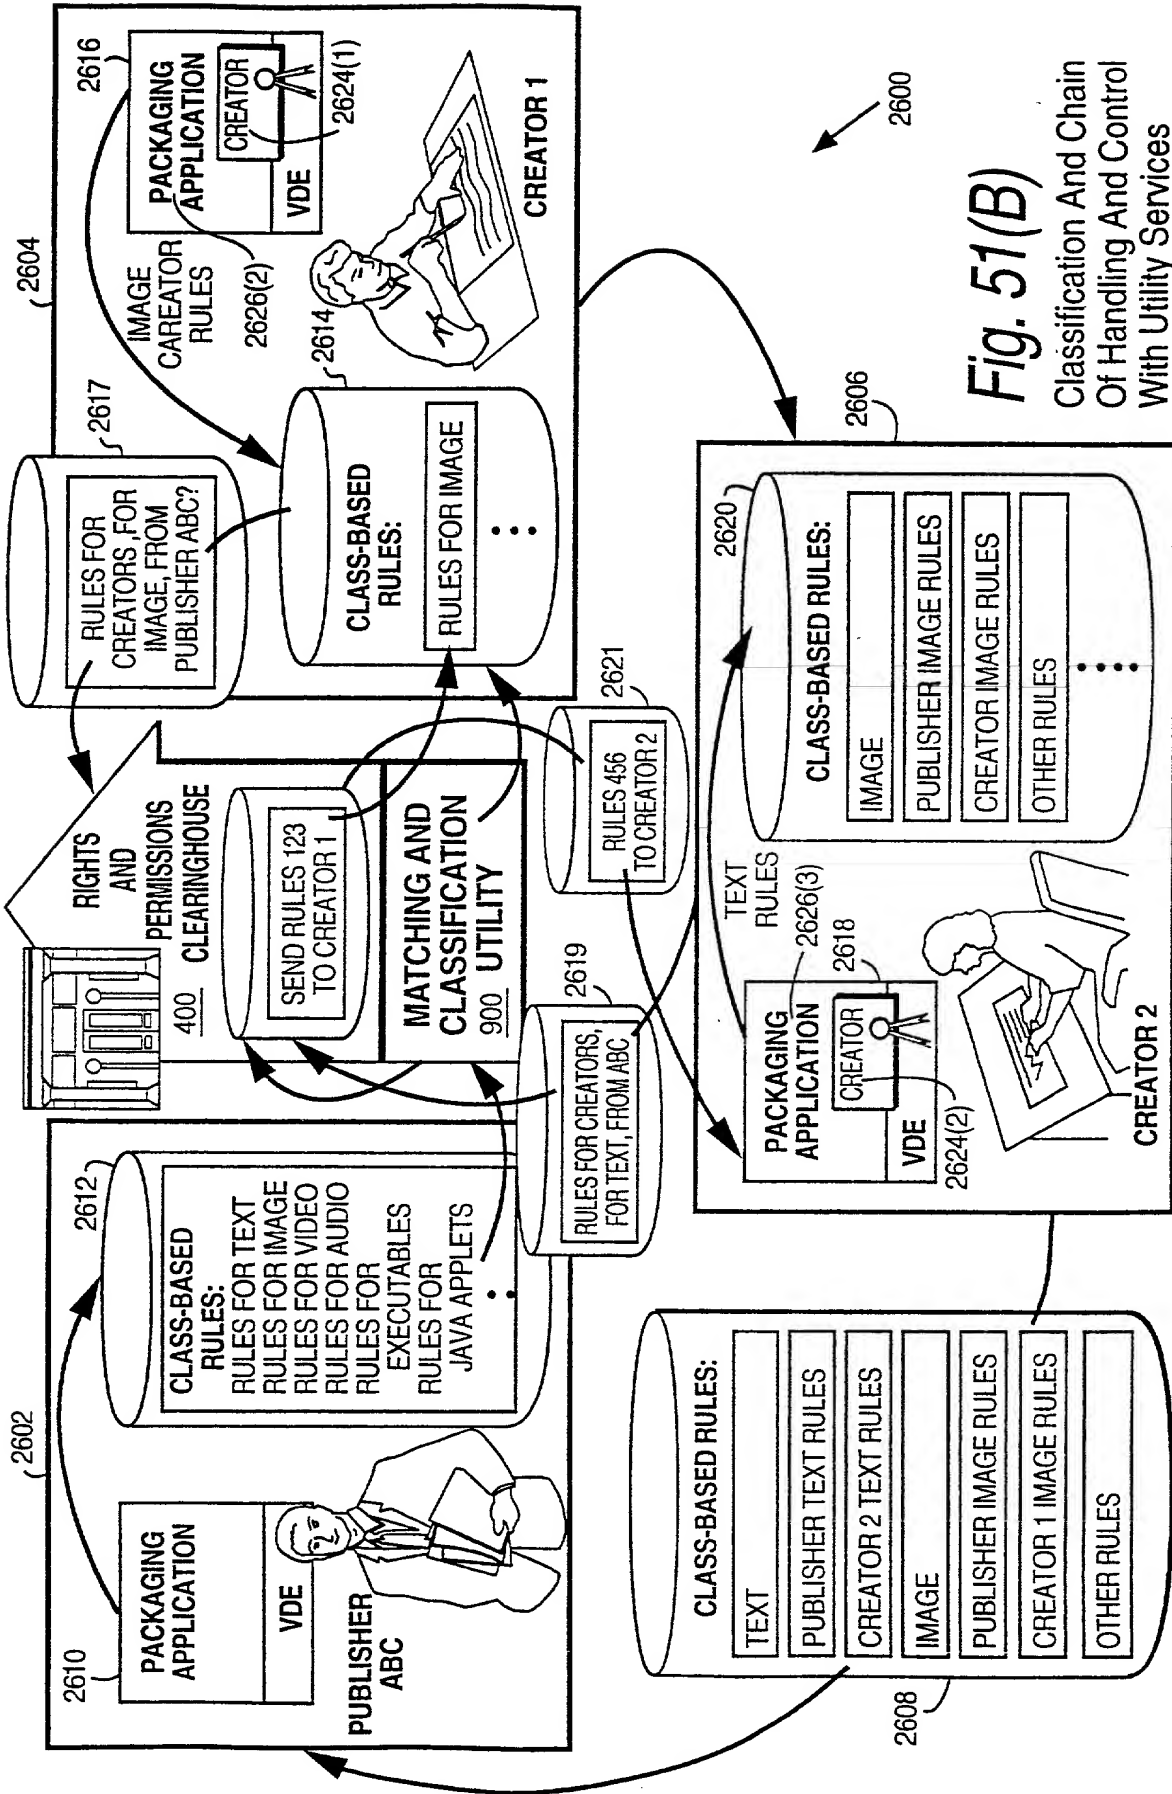


Fig. 51(A)
Classification And Chain
Of Handling And Control



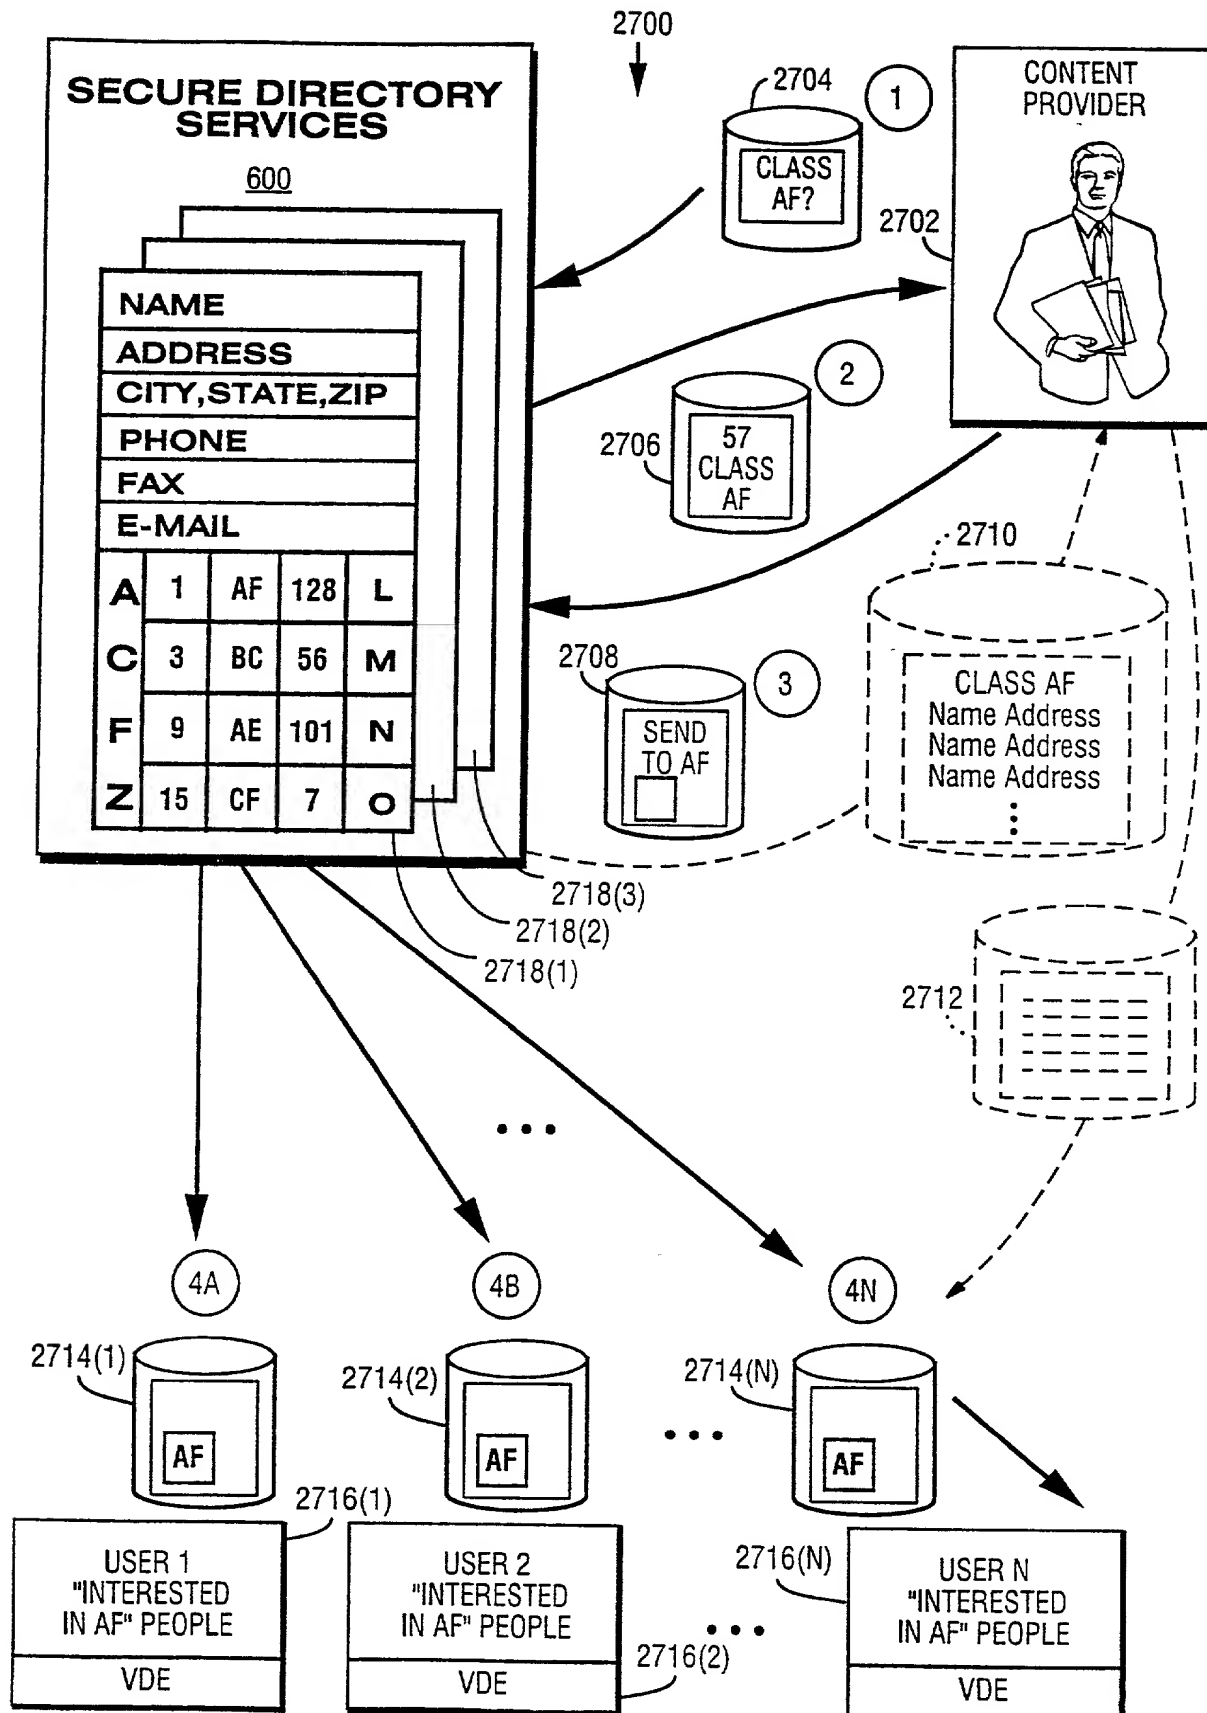



Fig. 52 Secure Directory Services



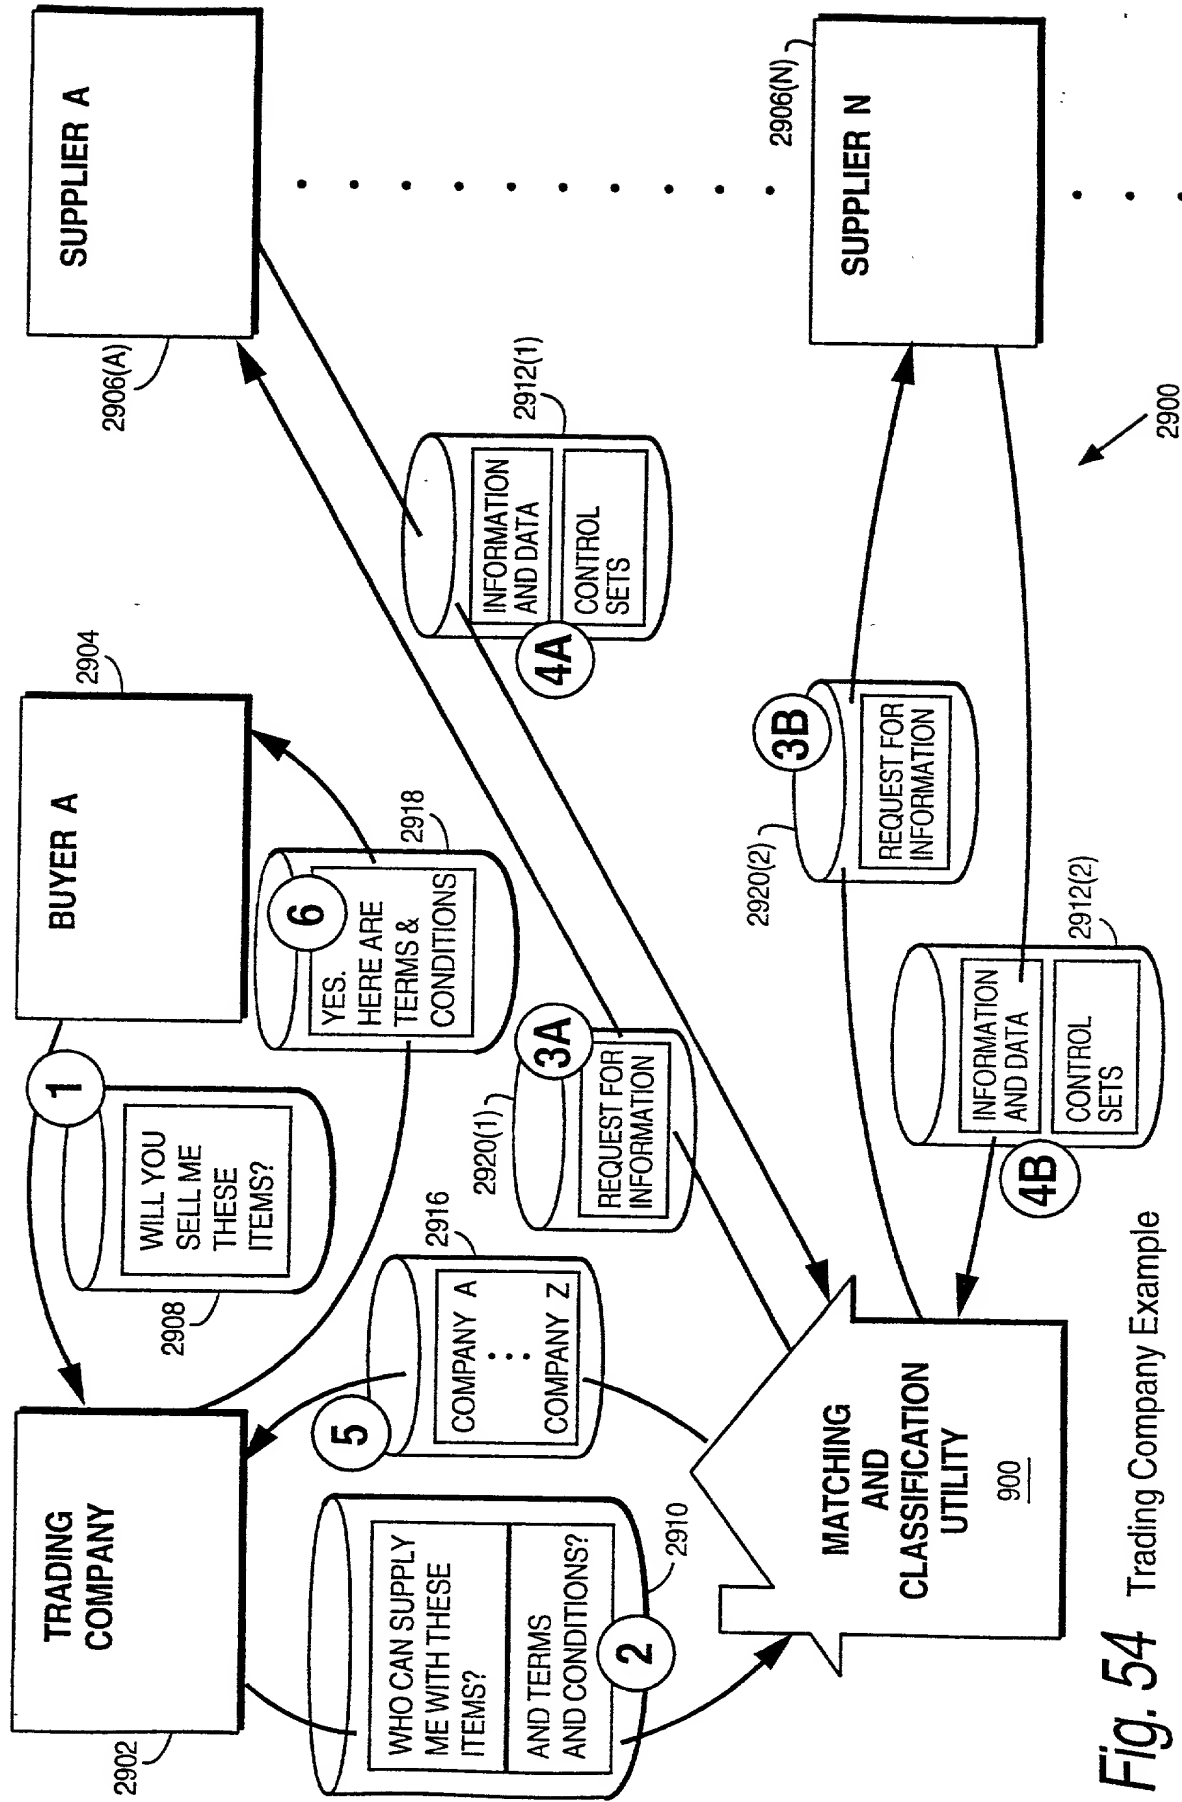


Fig. 54 Trading Company Example

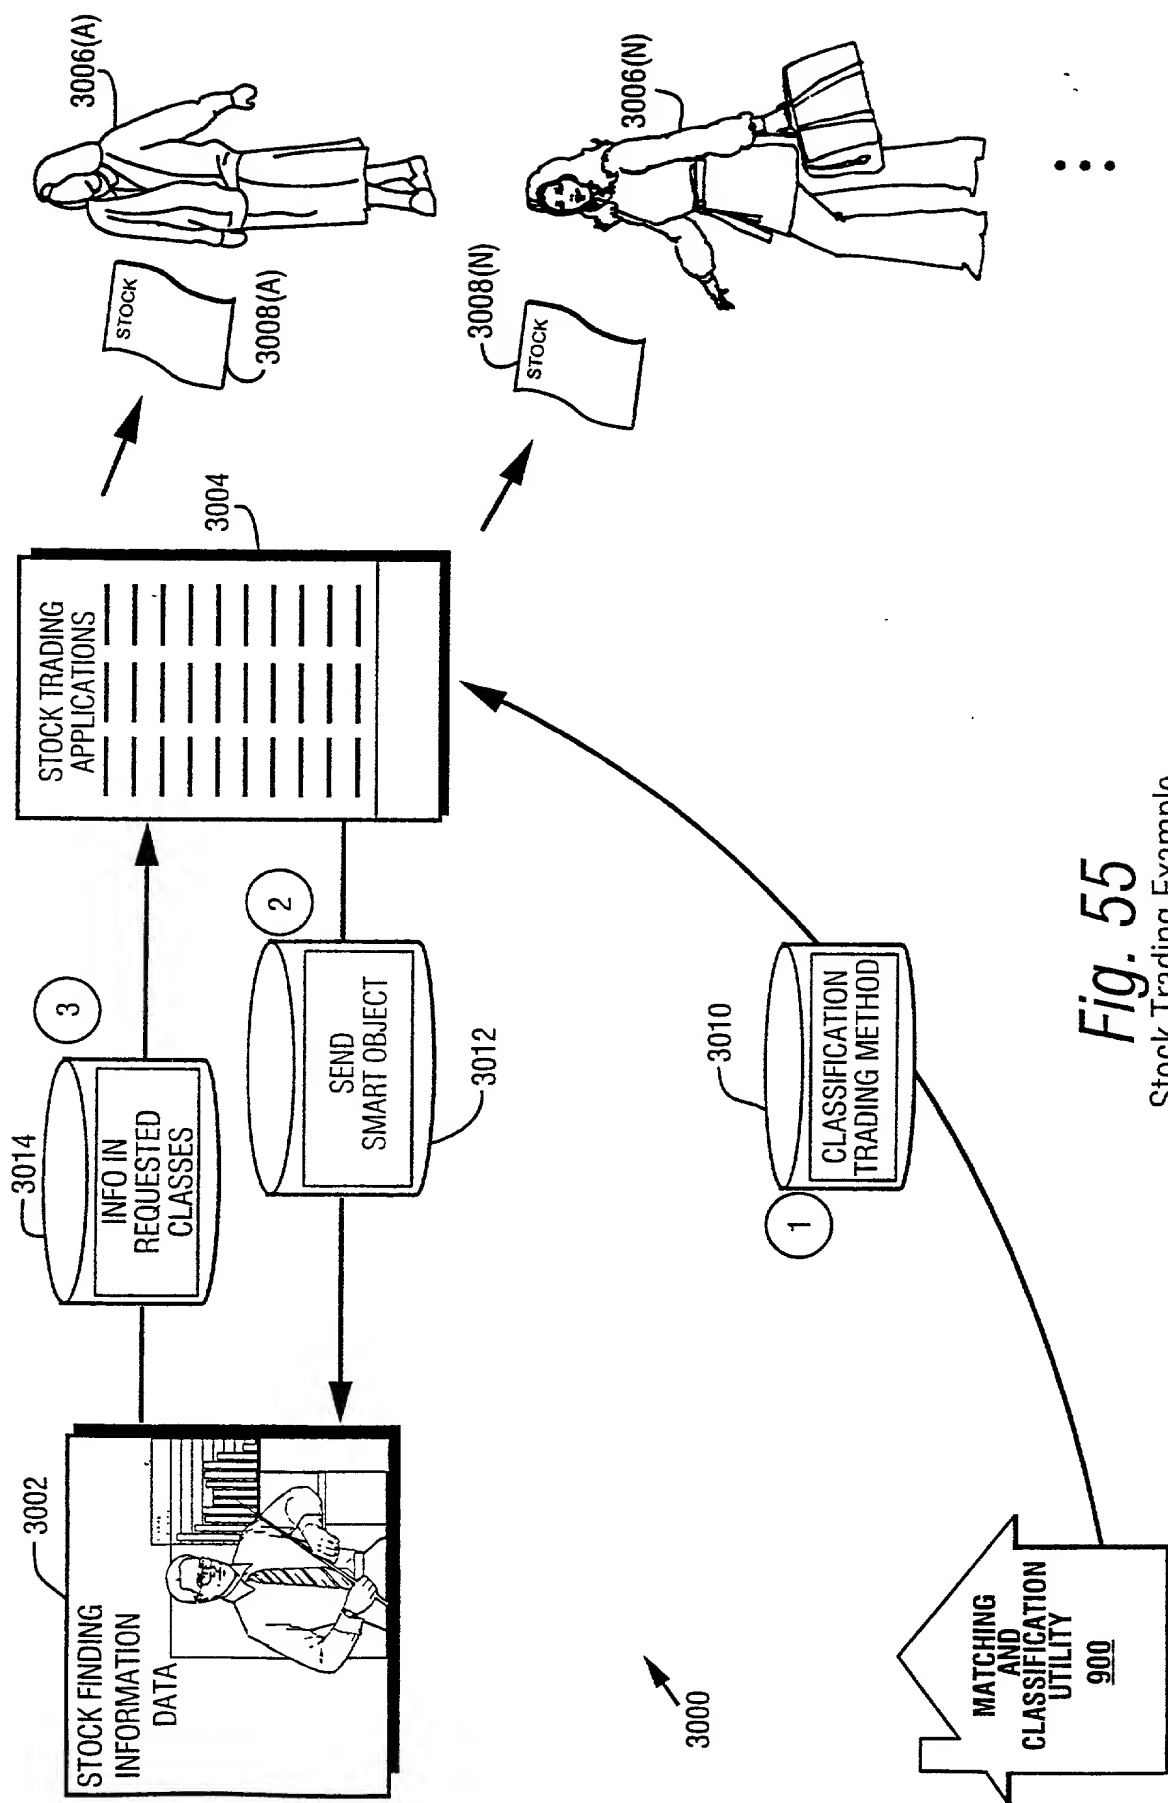


Fig. 55
Stock Trading Example

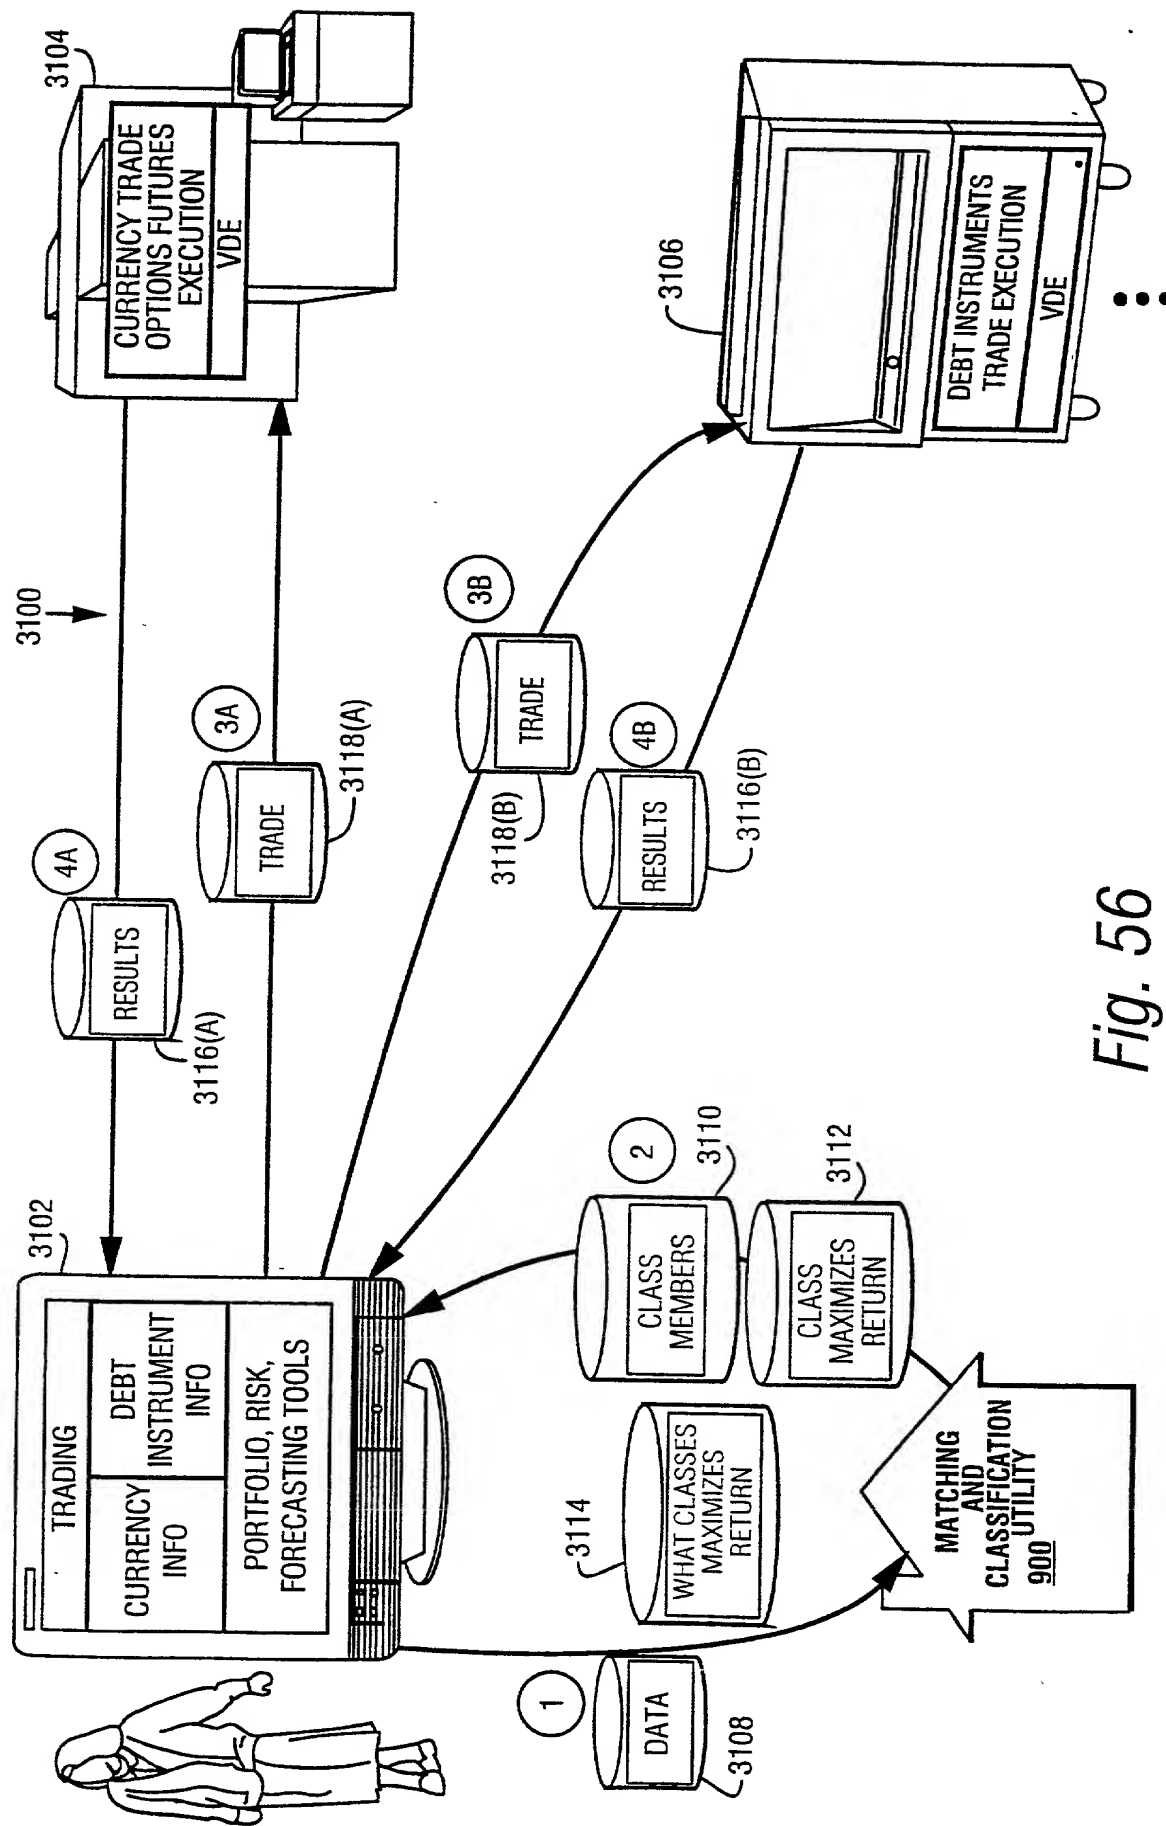


Fig. 56
Currency Trading Example

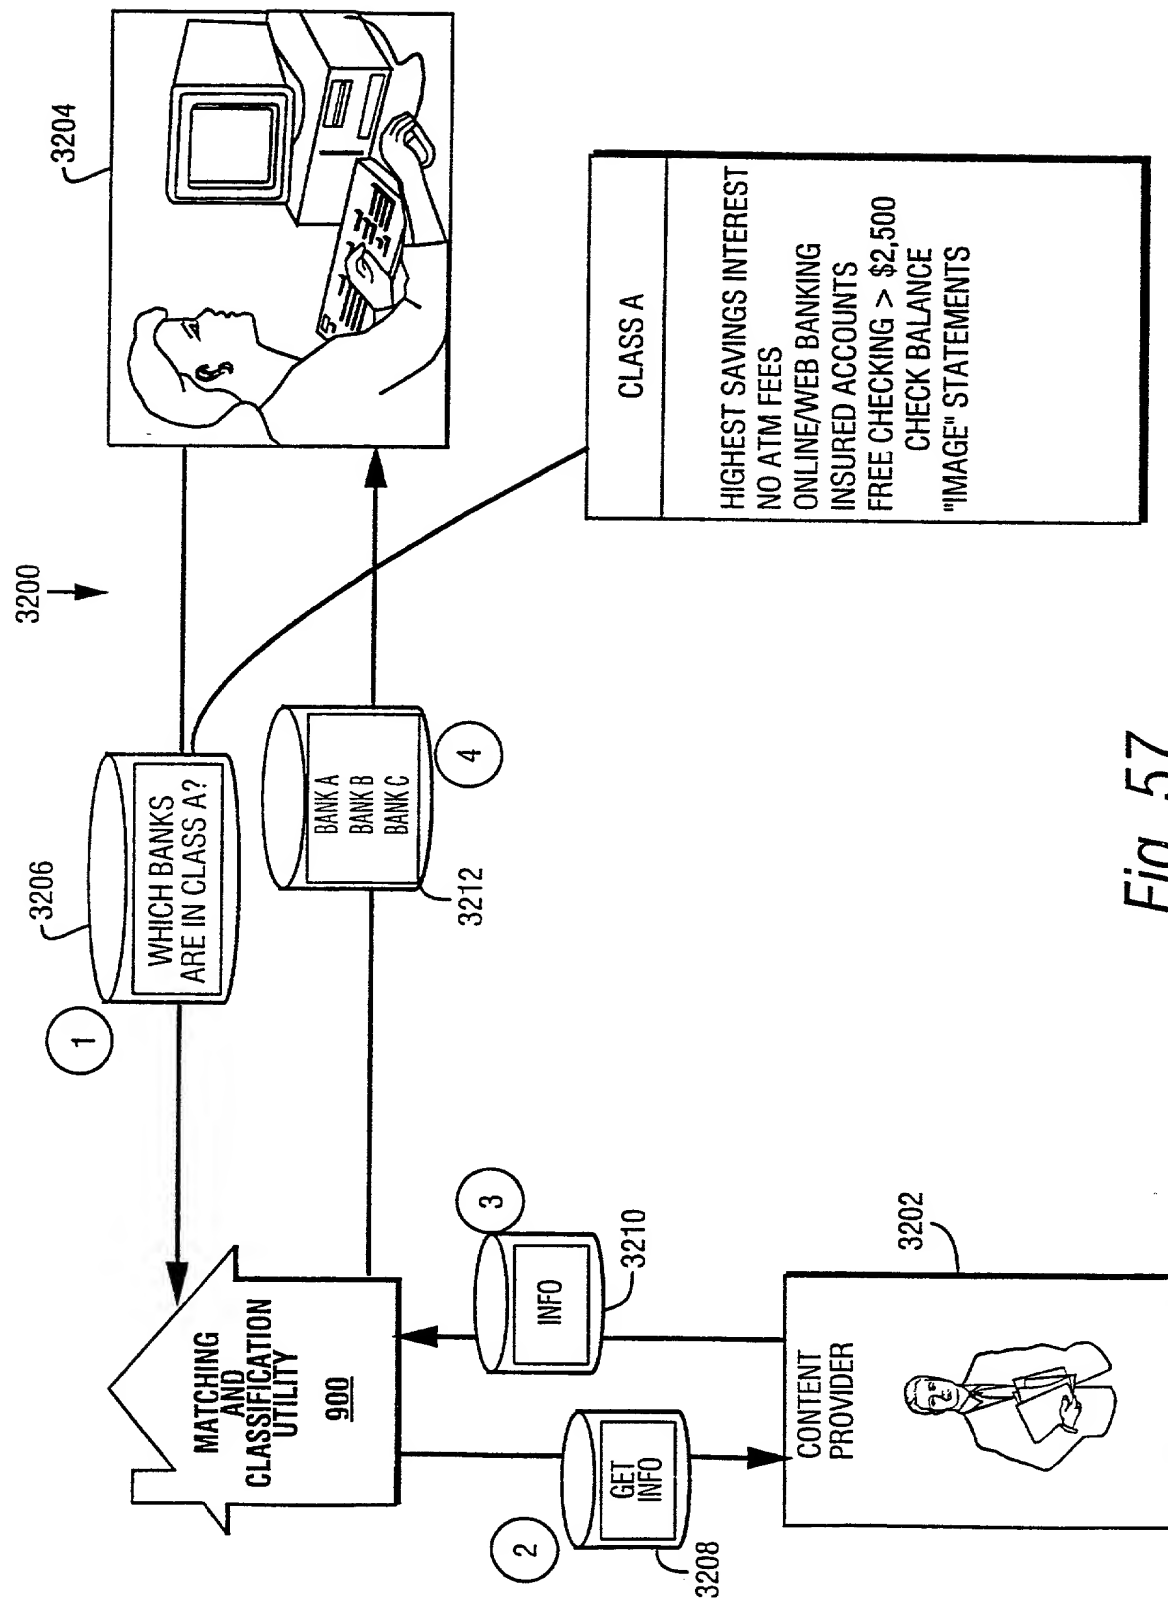


Fig. 57

Consumer Banking Example Locating Services In A Class!

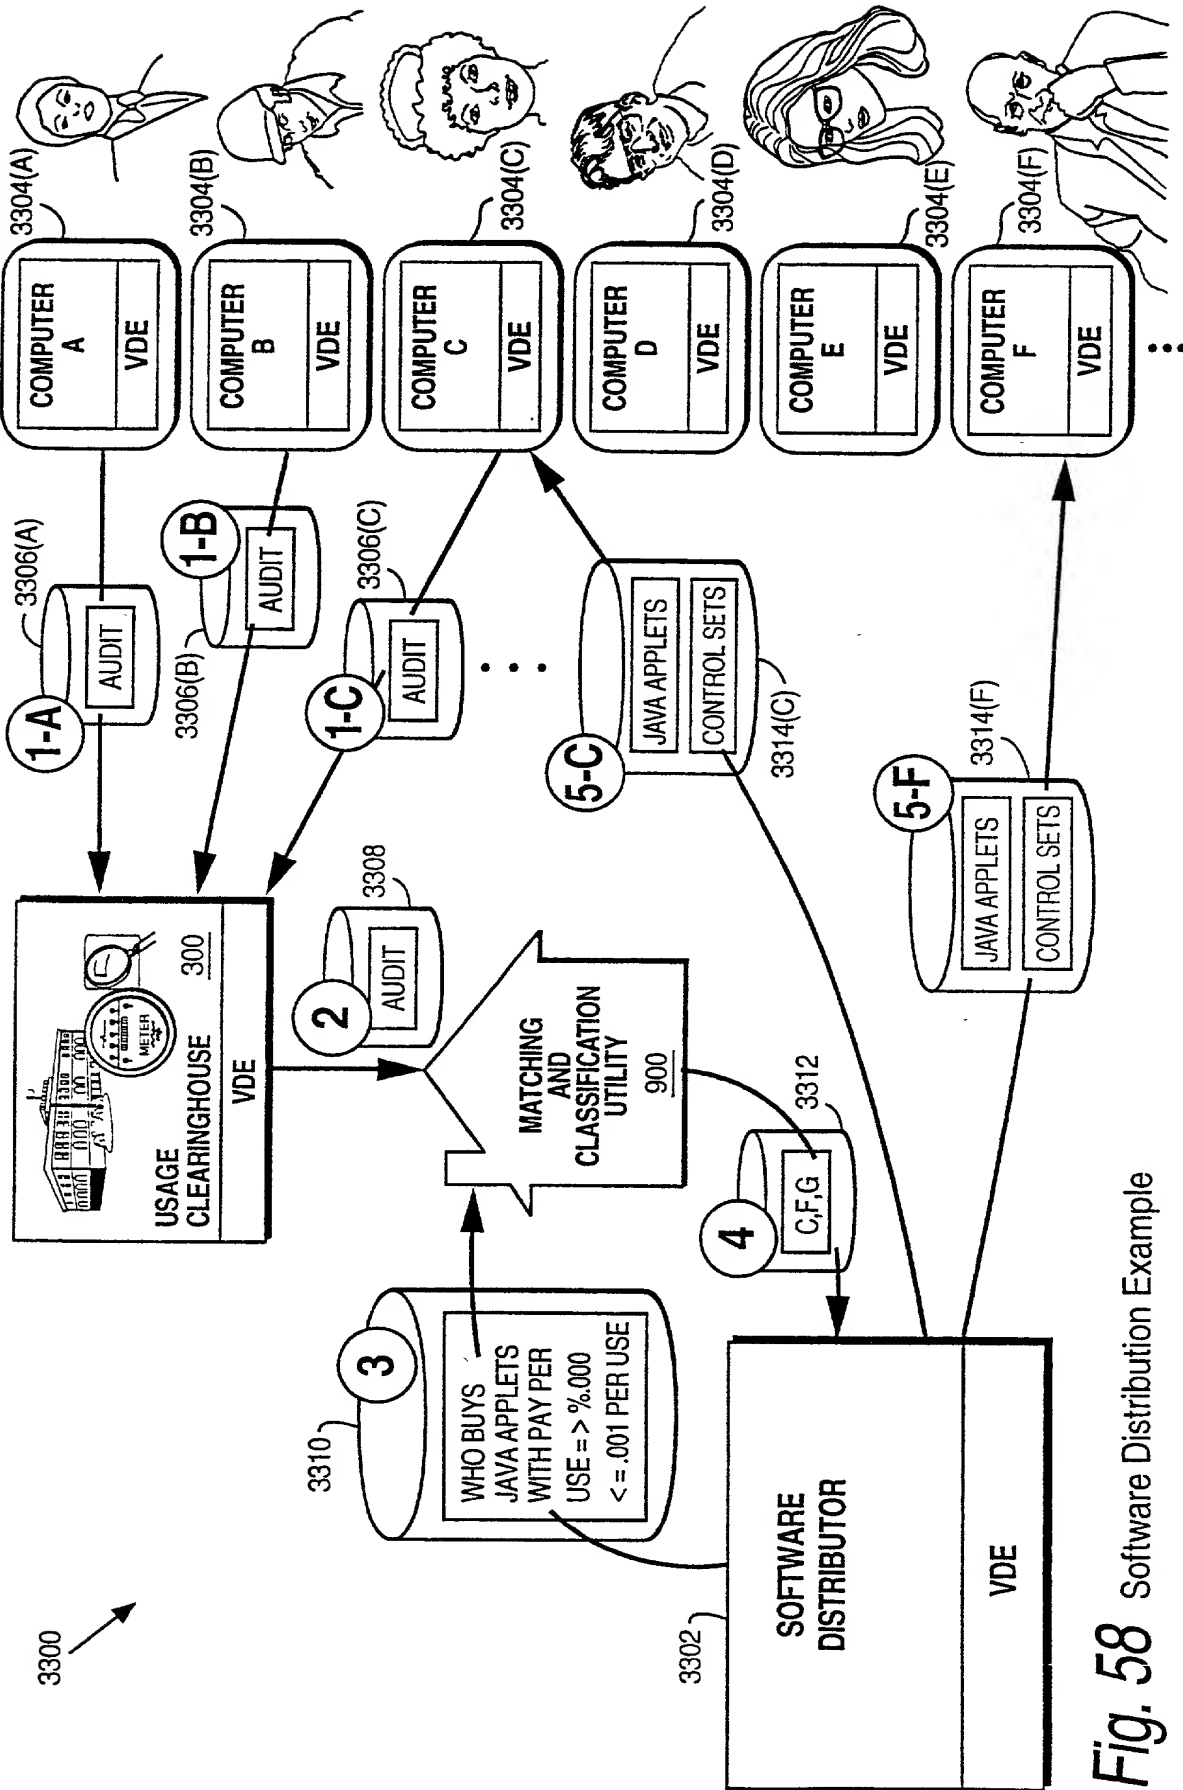
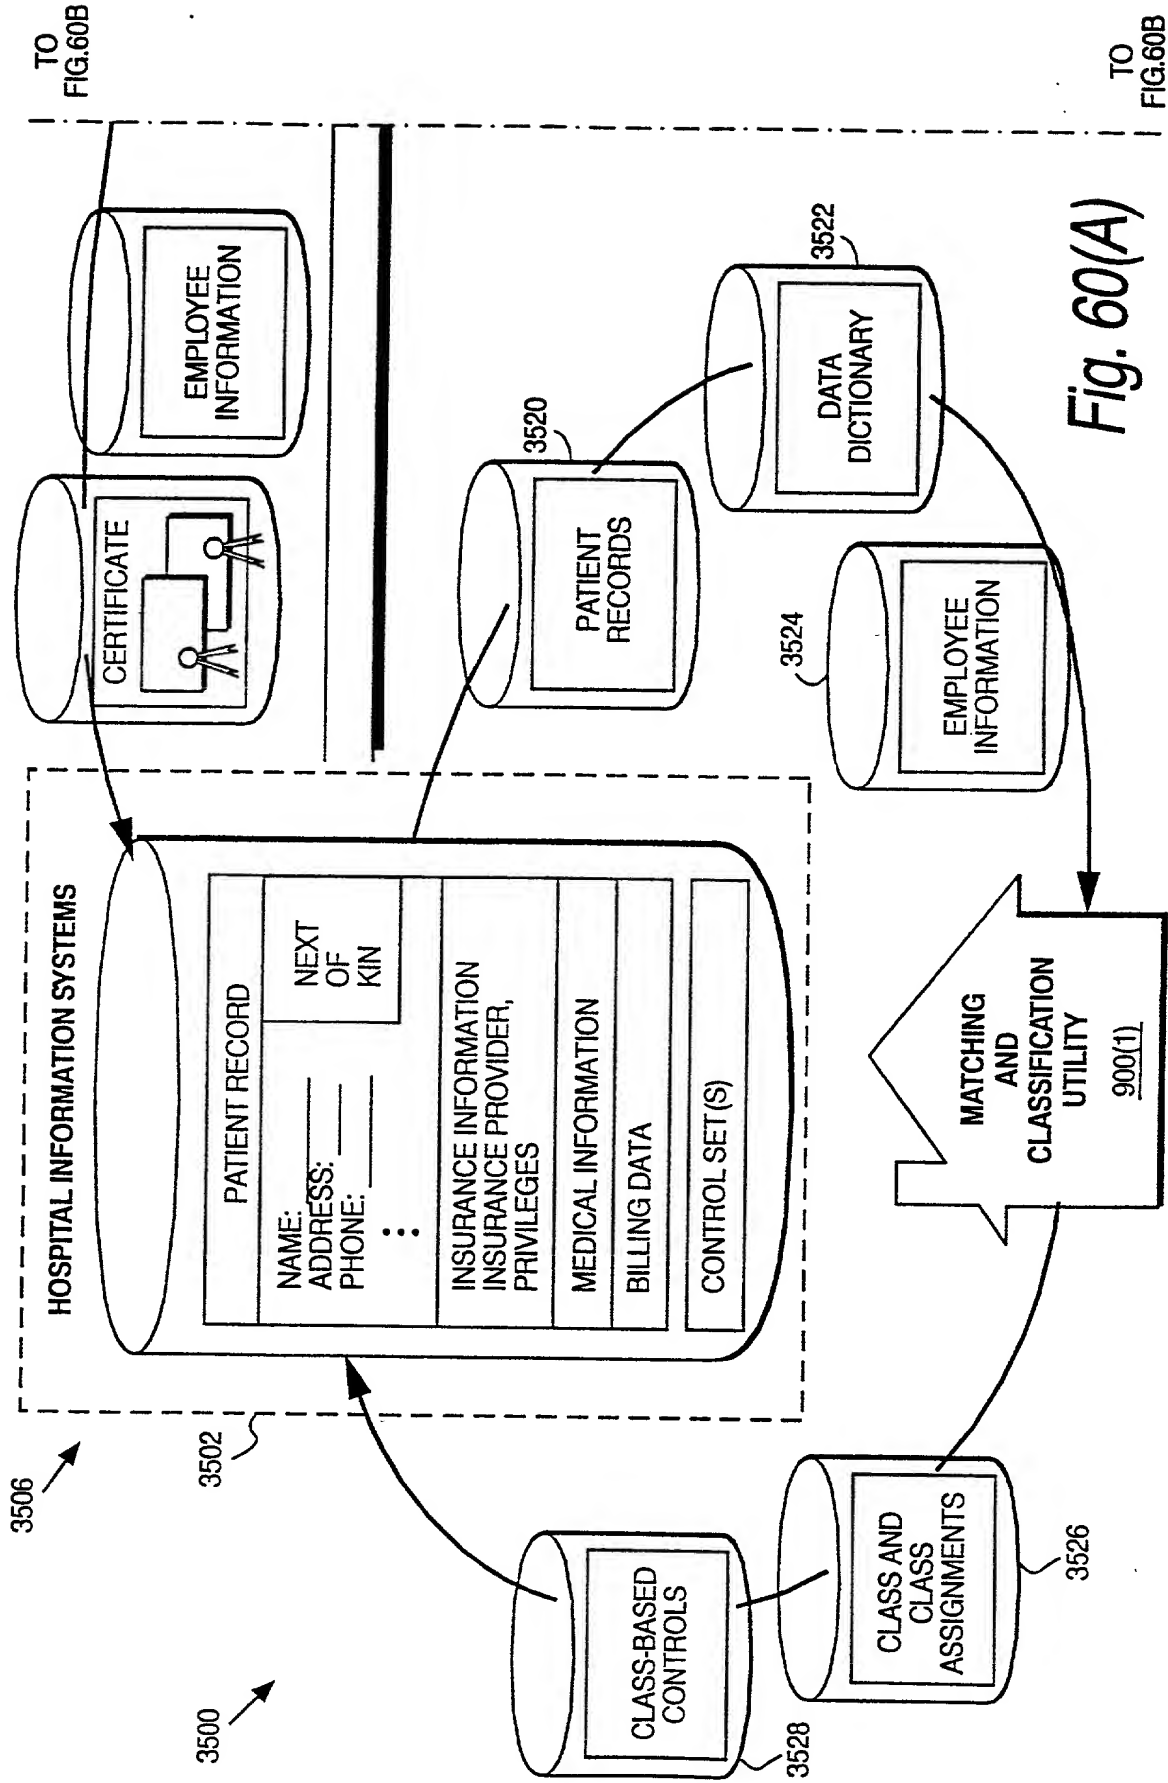
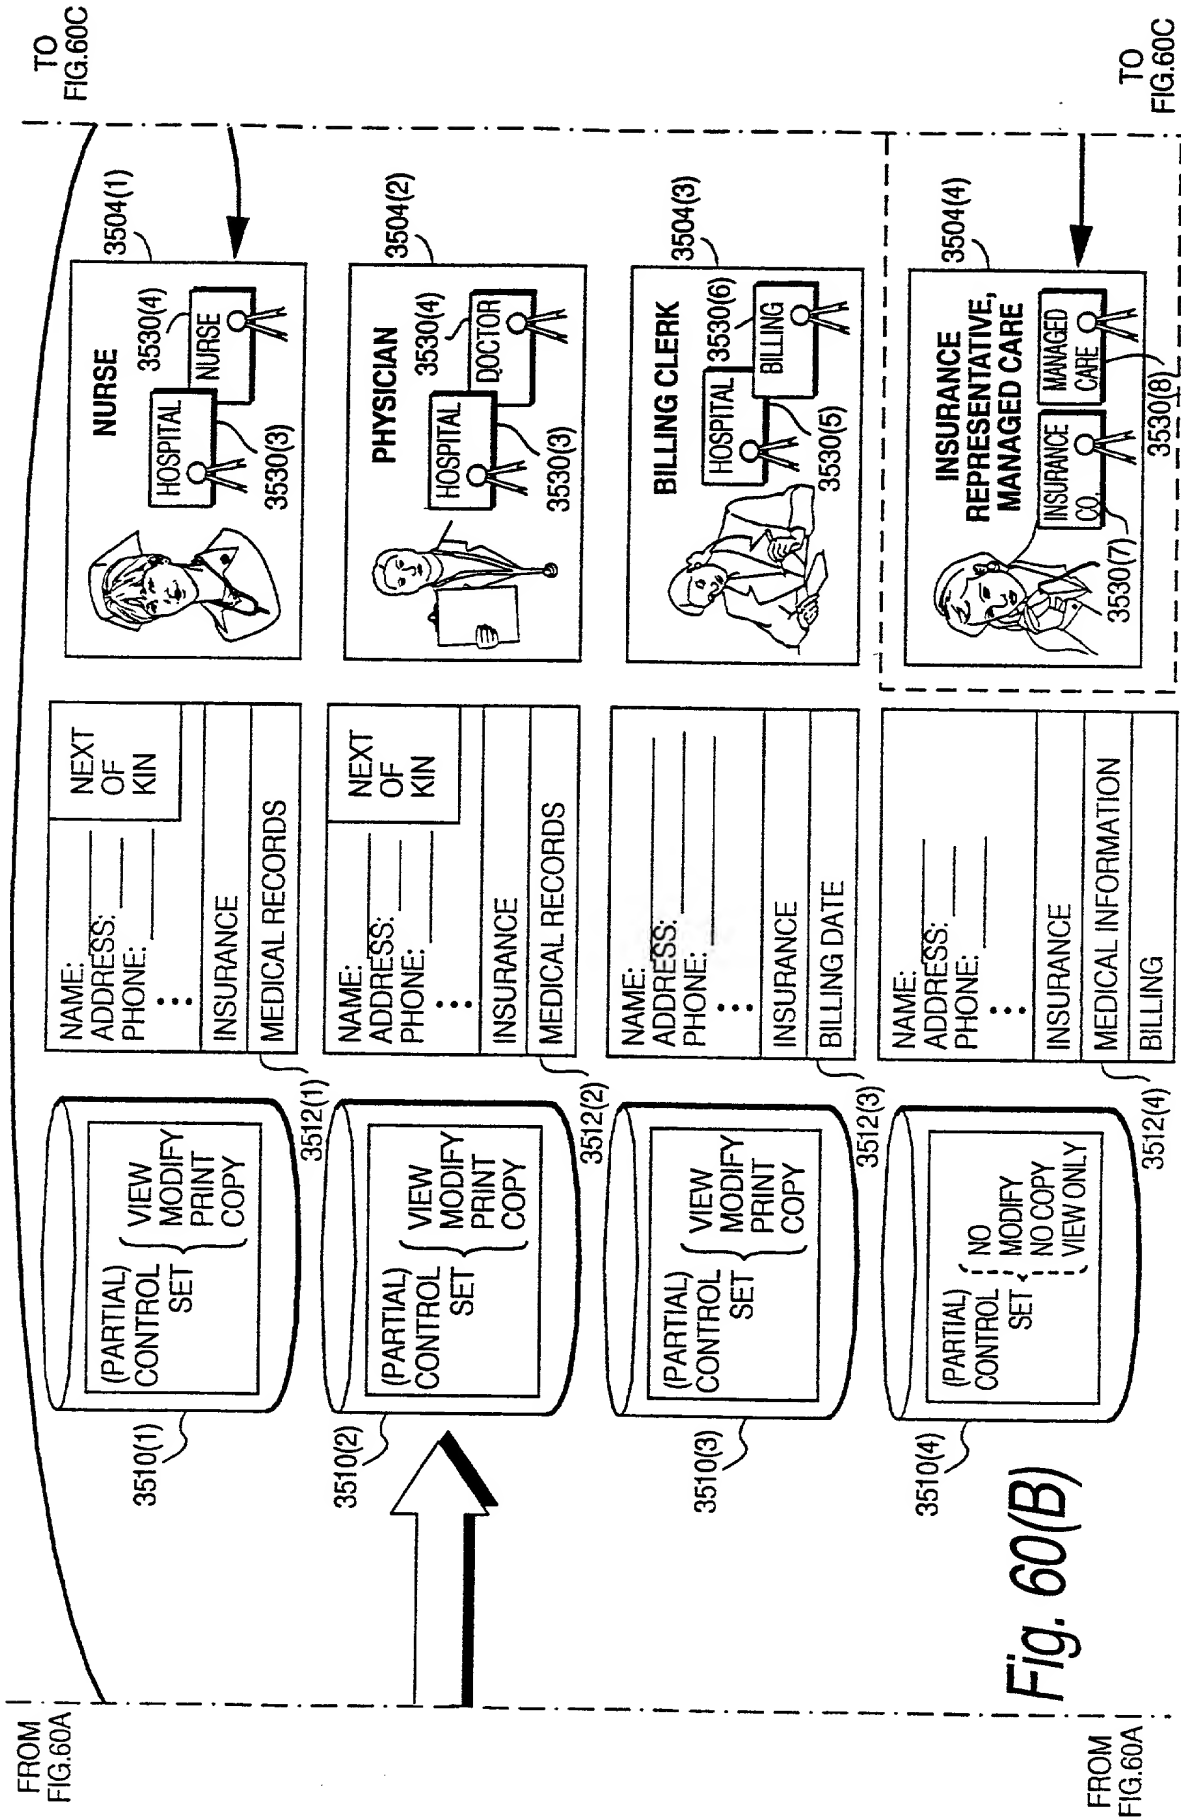


Fig. 58 Software Distribution Example





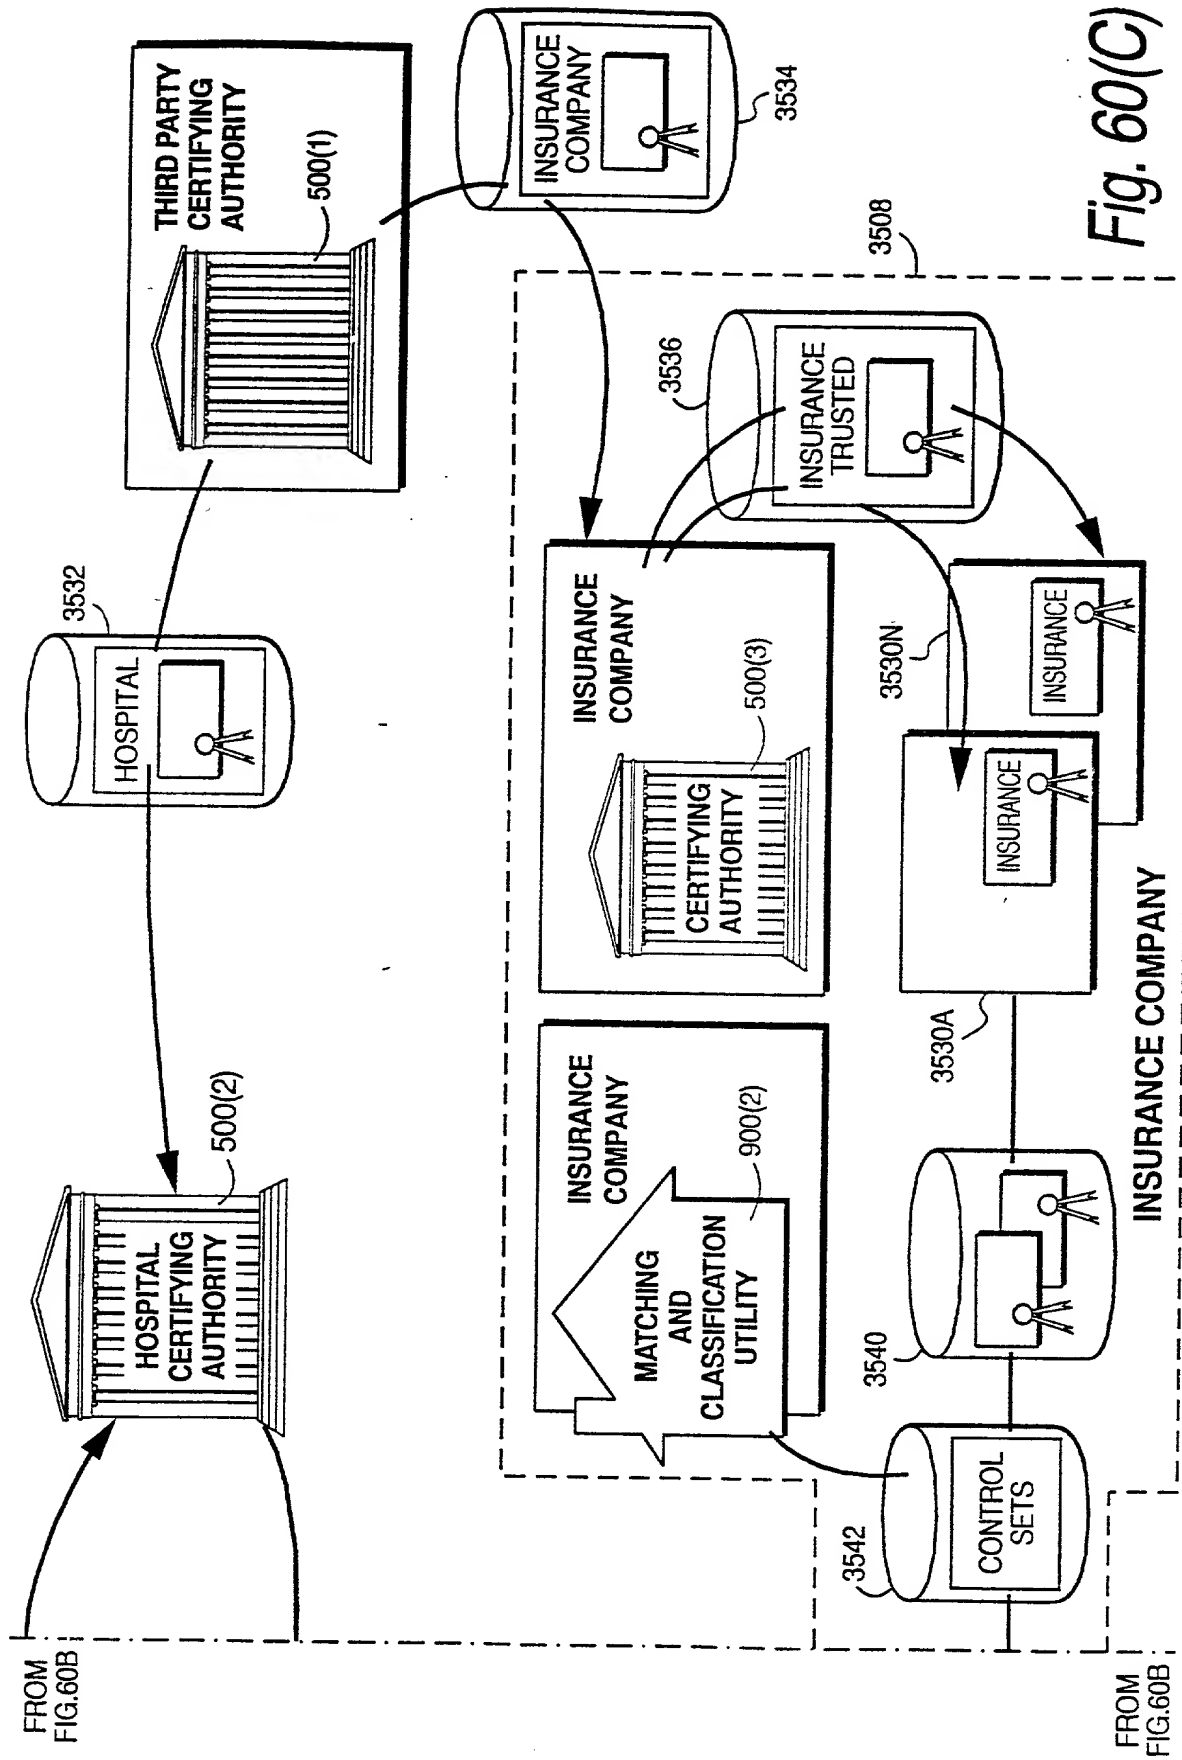


Fig. 60(C)

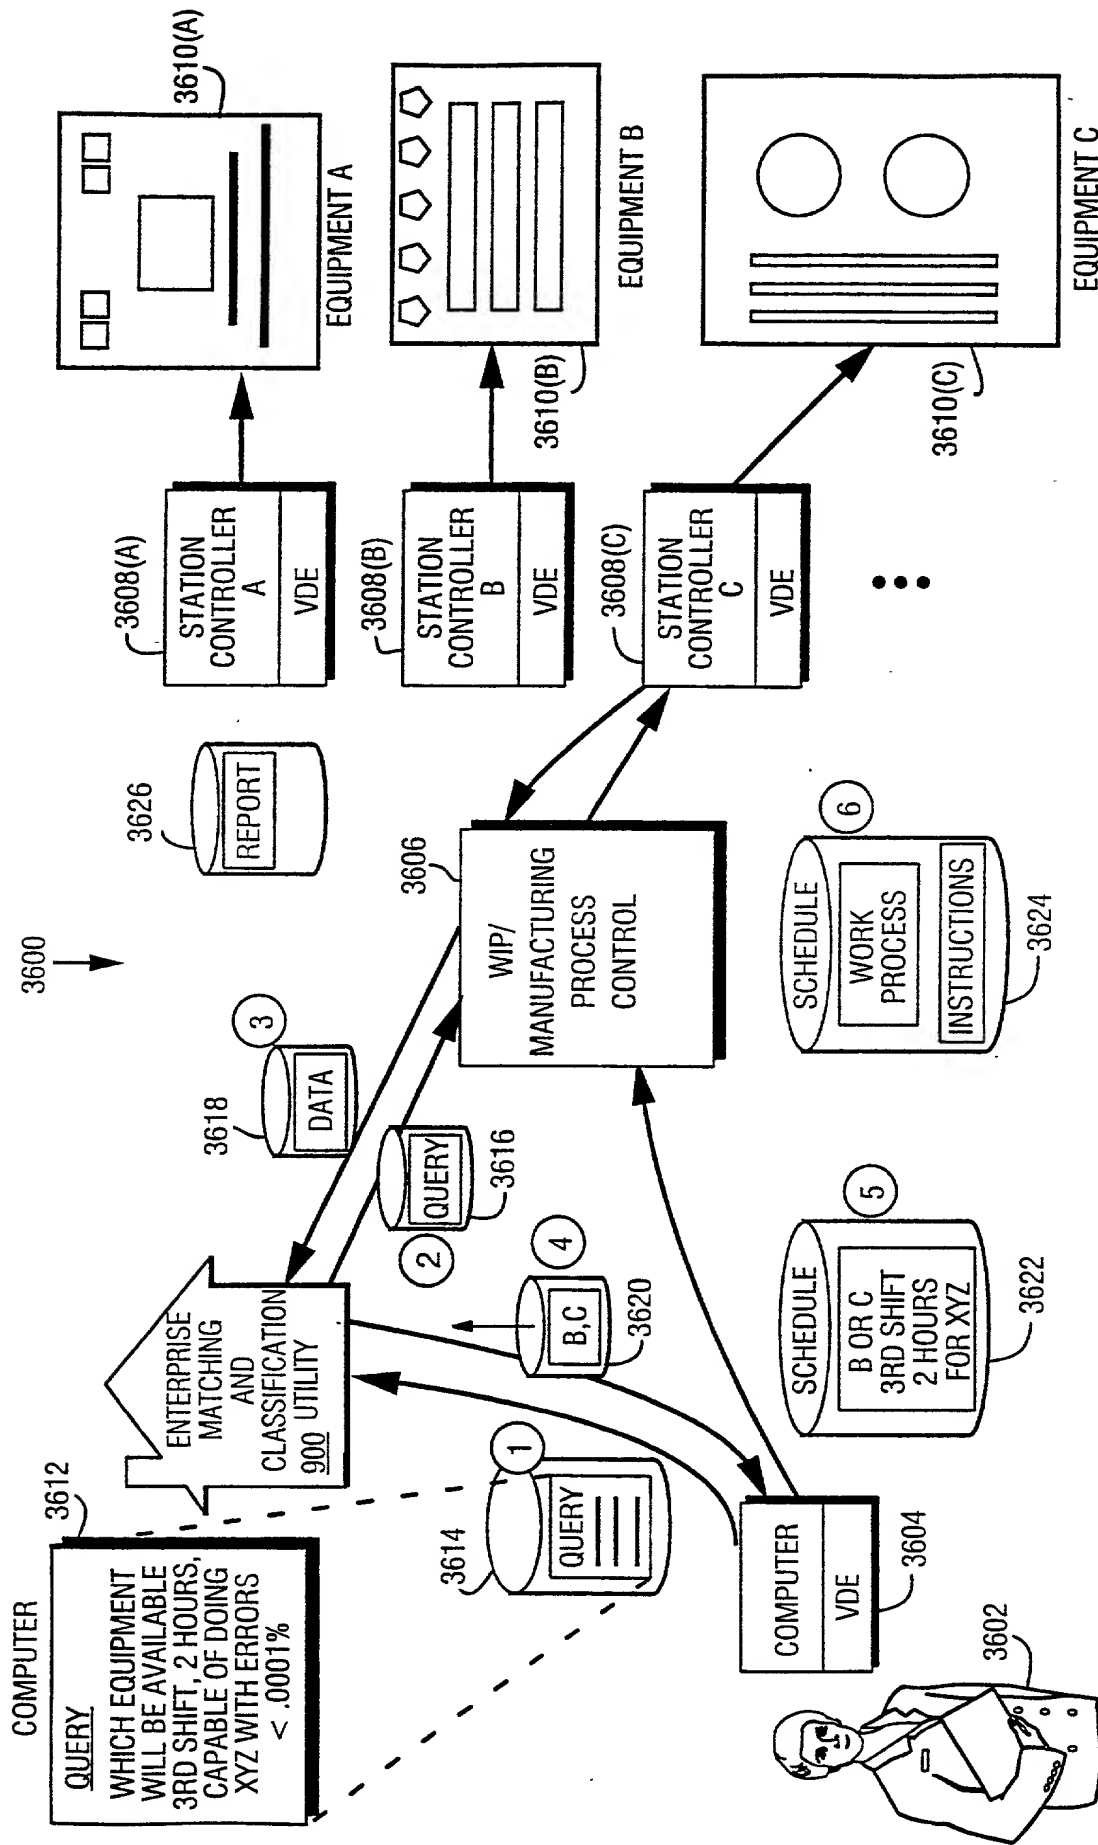


Fig. 61 Workflow Example

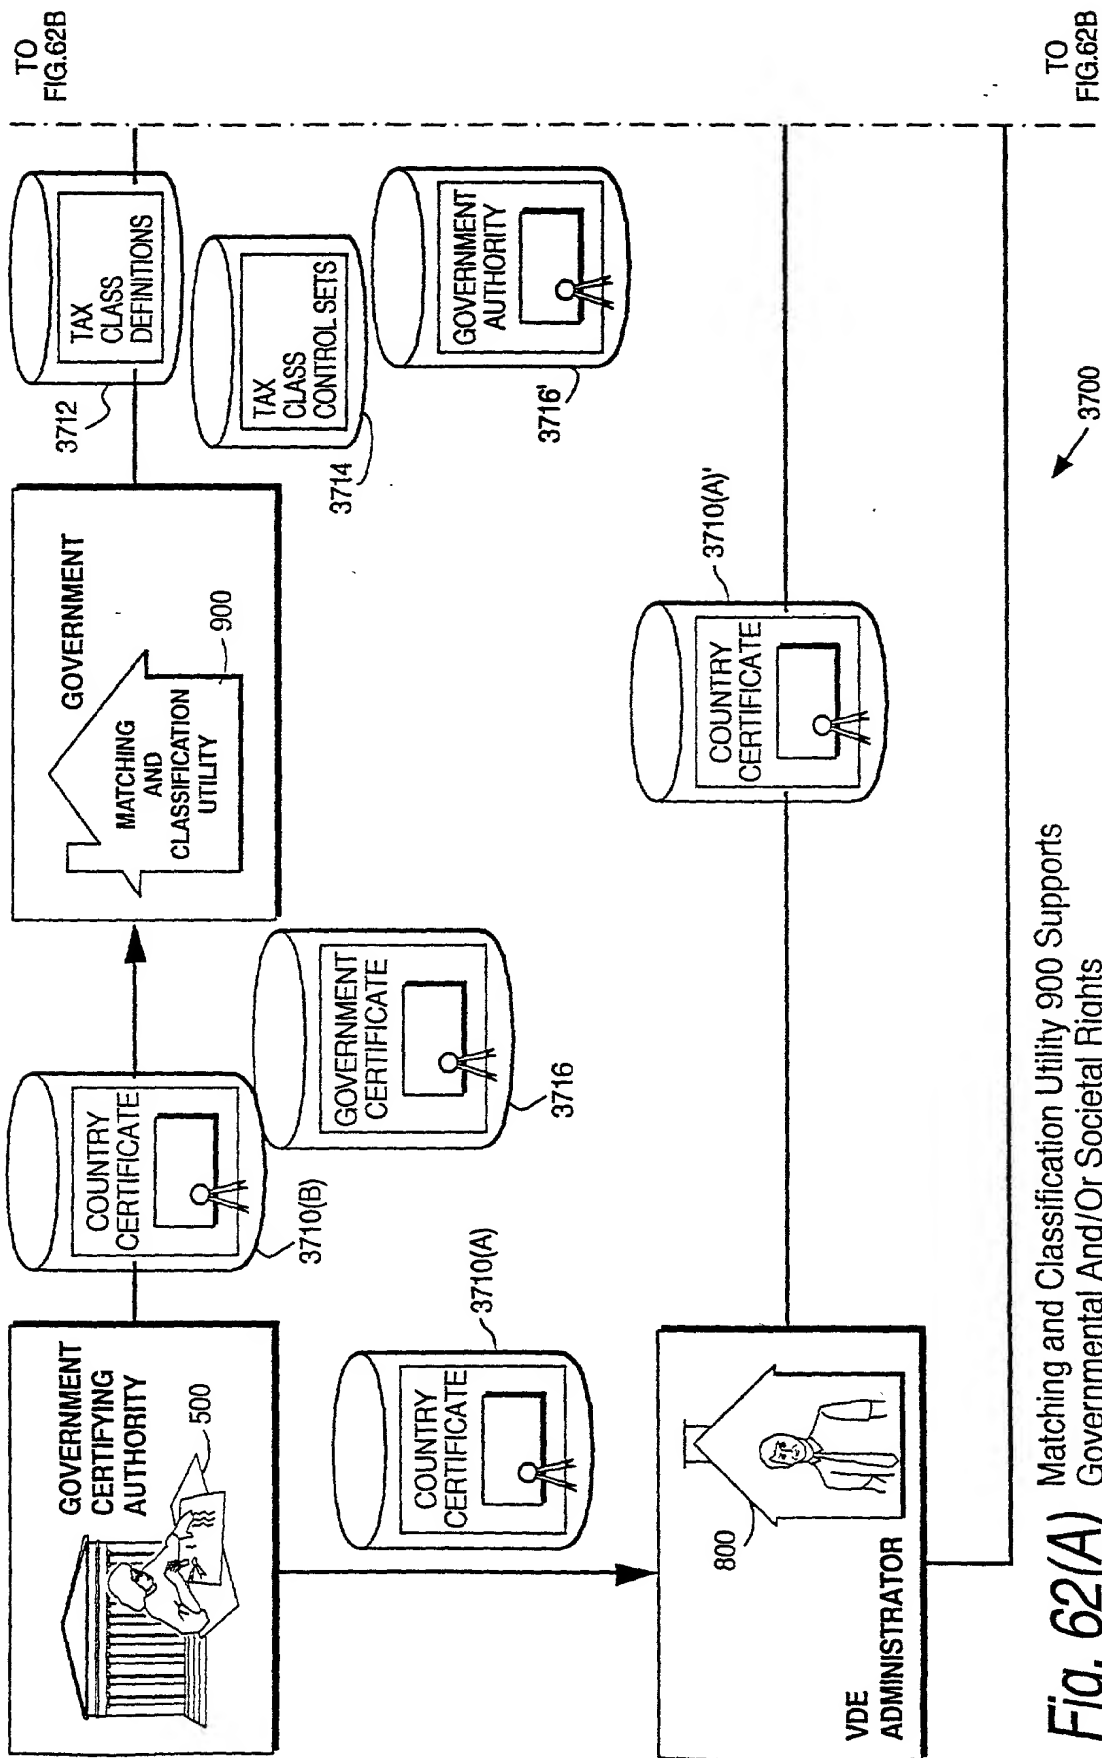
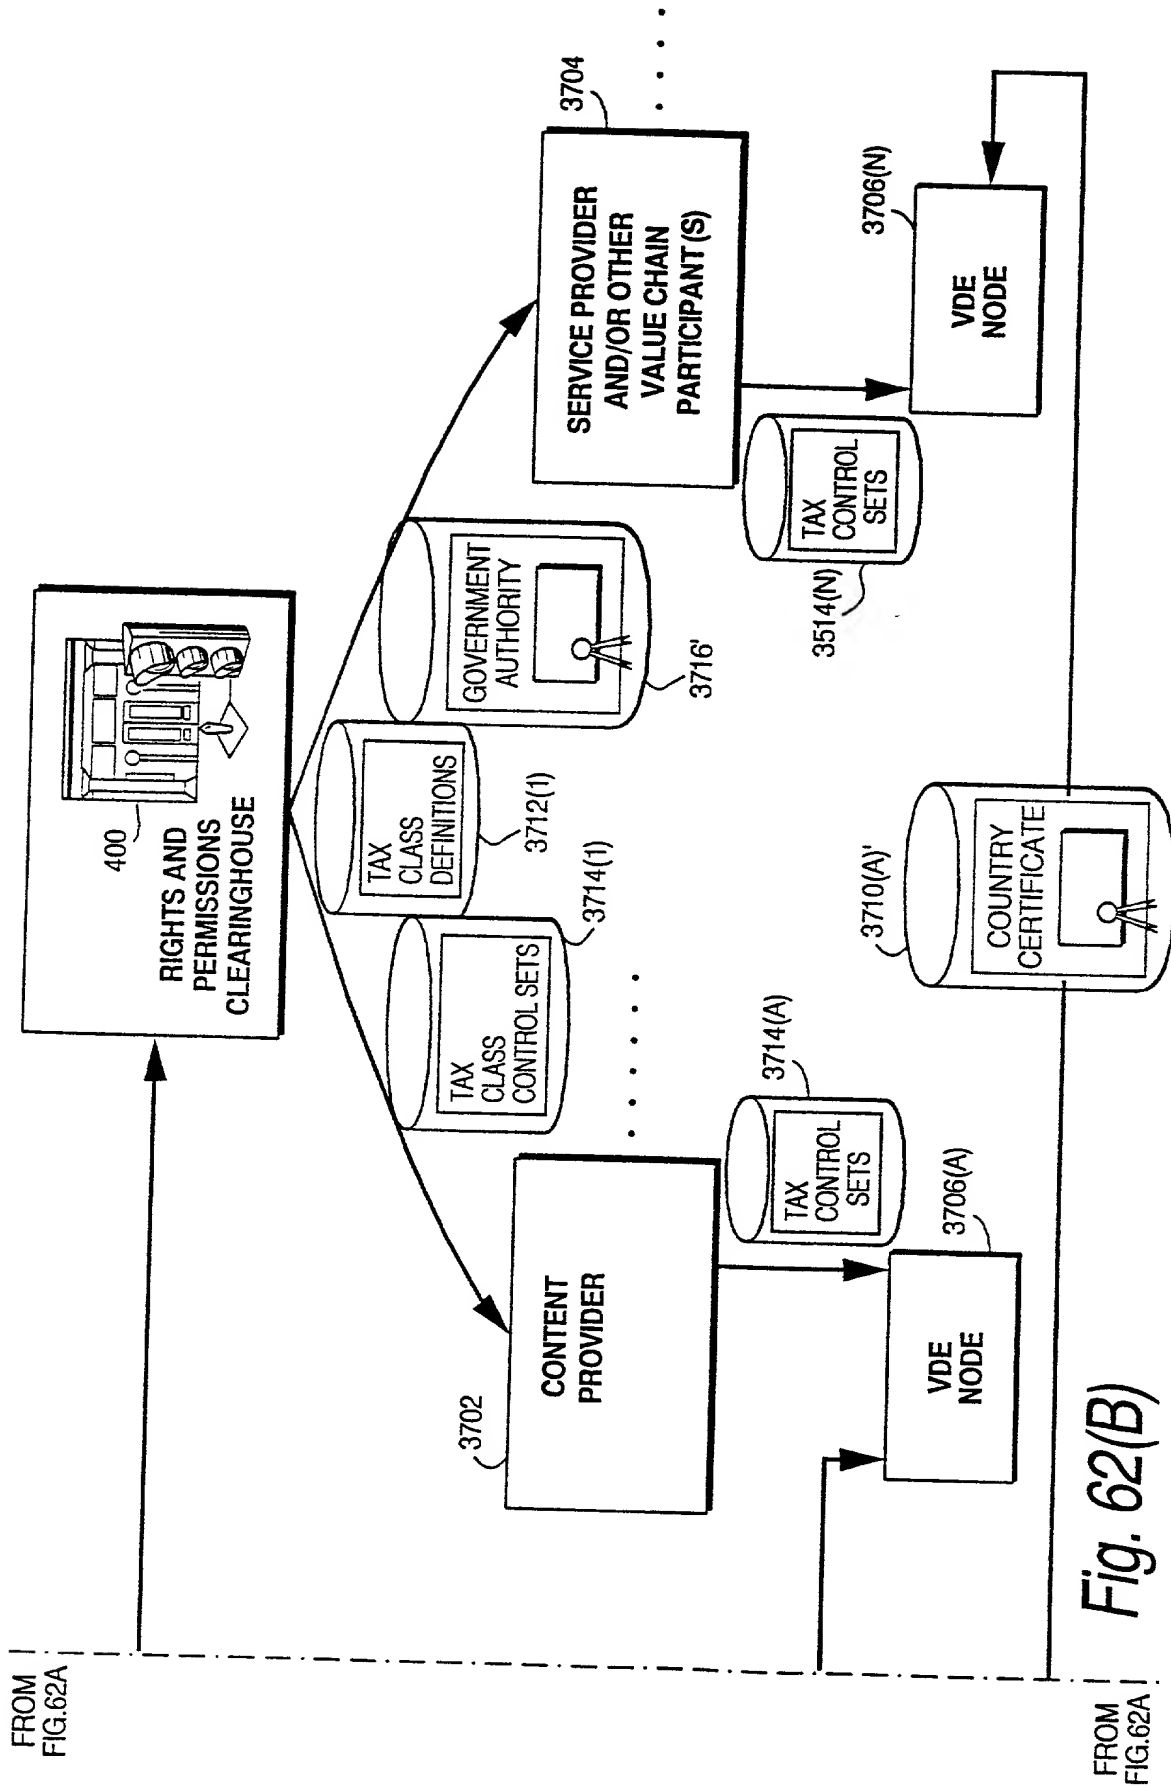


Fig. 62(A) Matching and Classification Utility 900 Supports Governmental And/Or Societal Rights



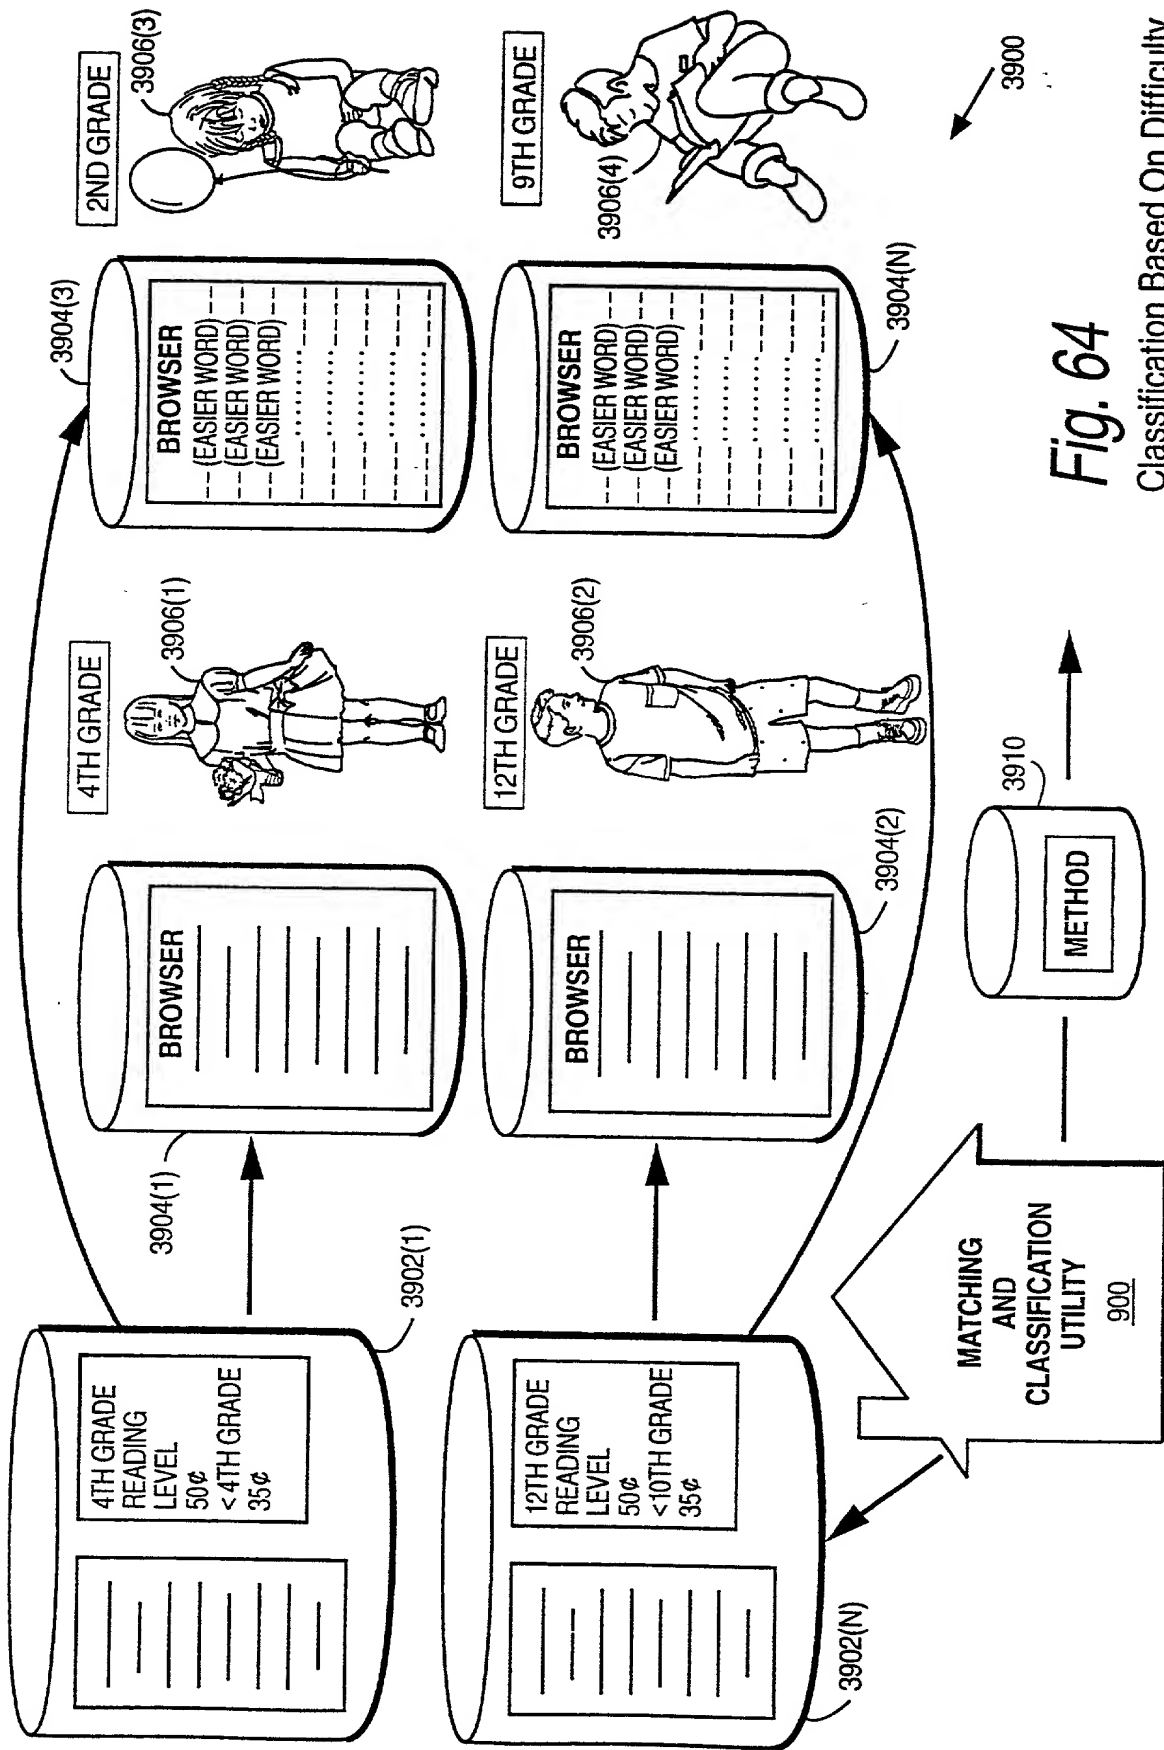


Fig. 64

Classification Based On Difficulty

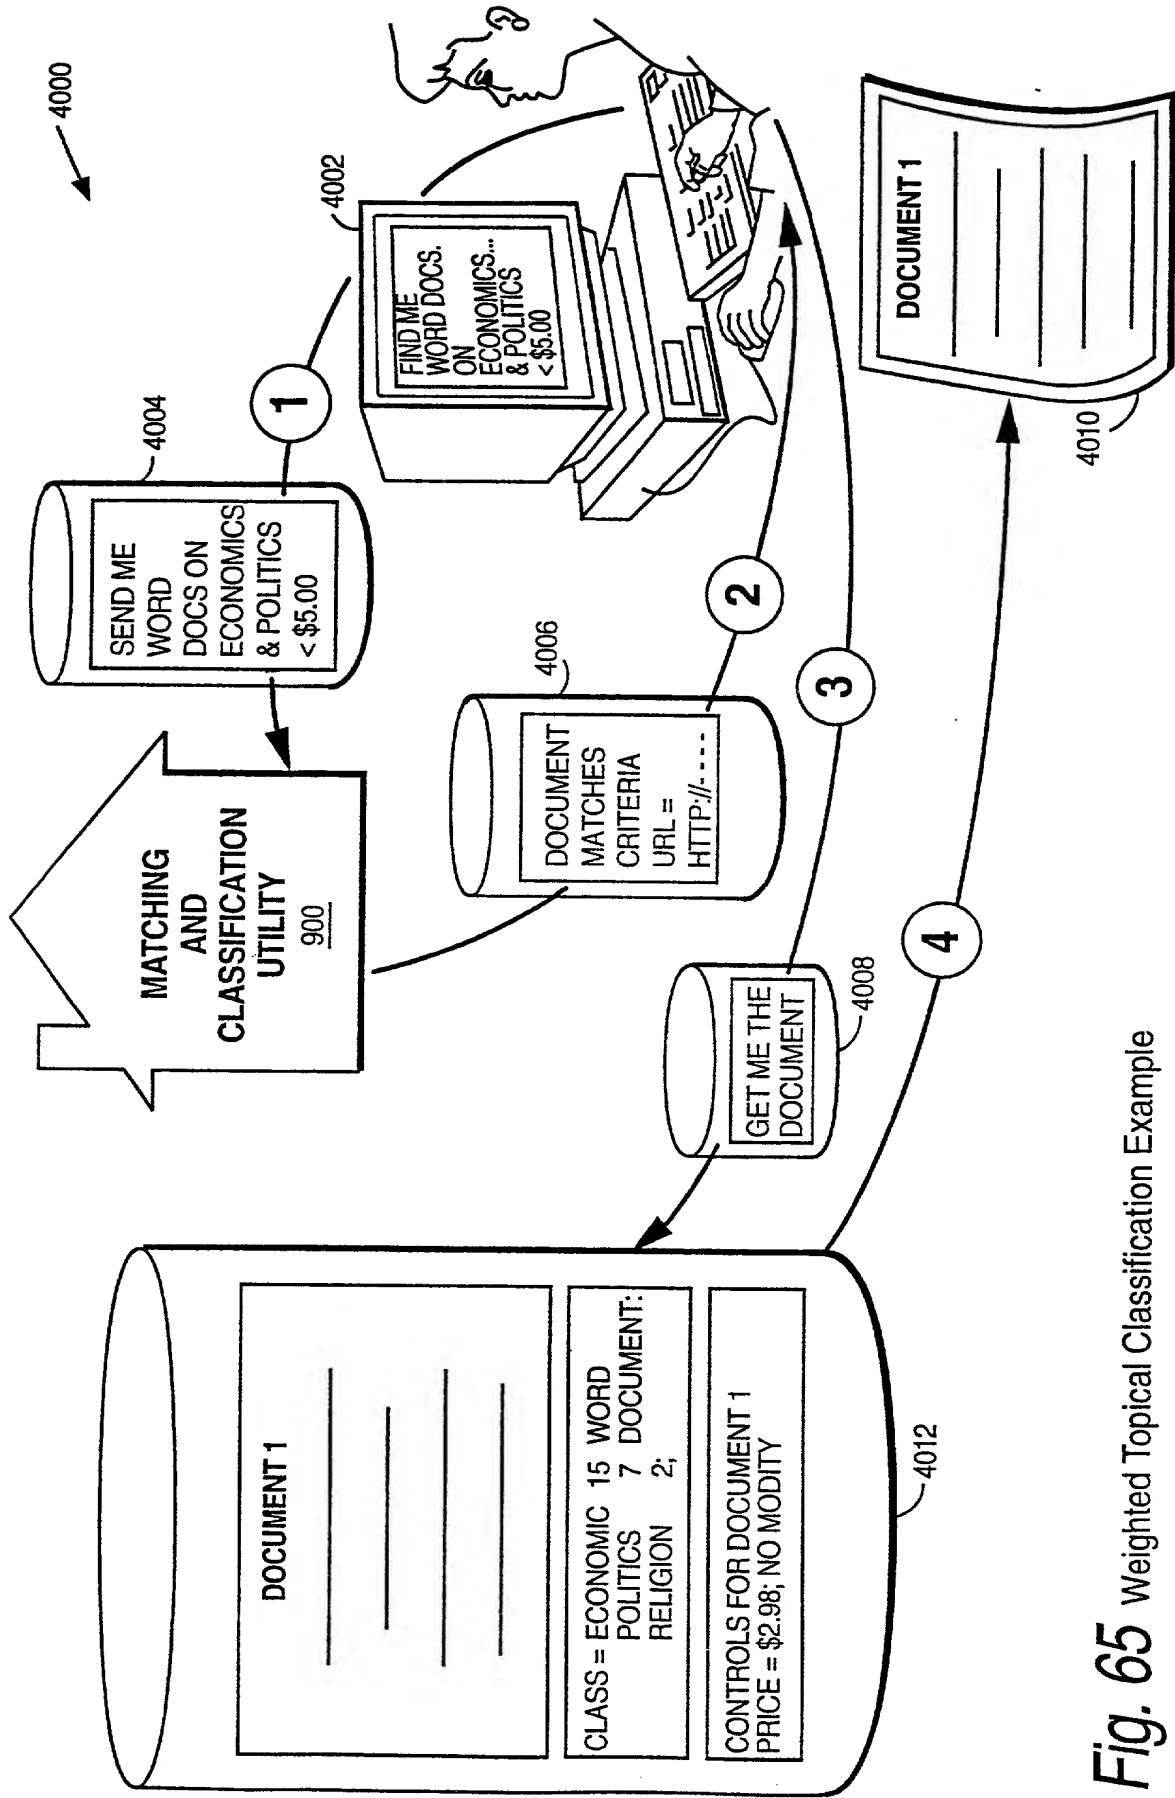


Fig. 65 Weighted Topical Classification Example

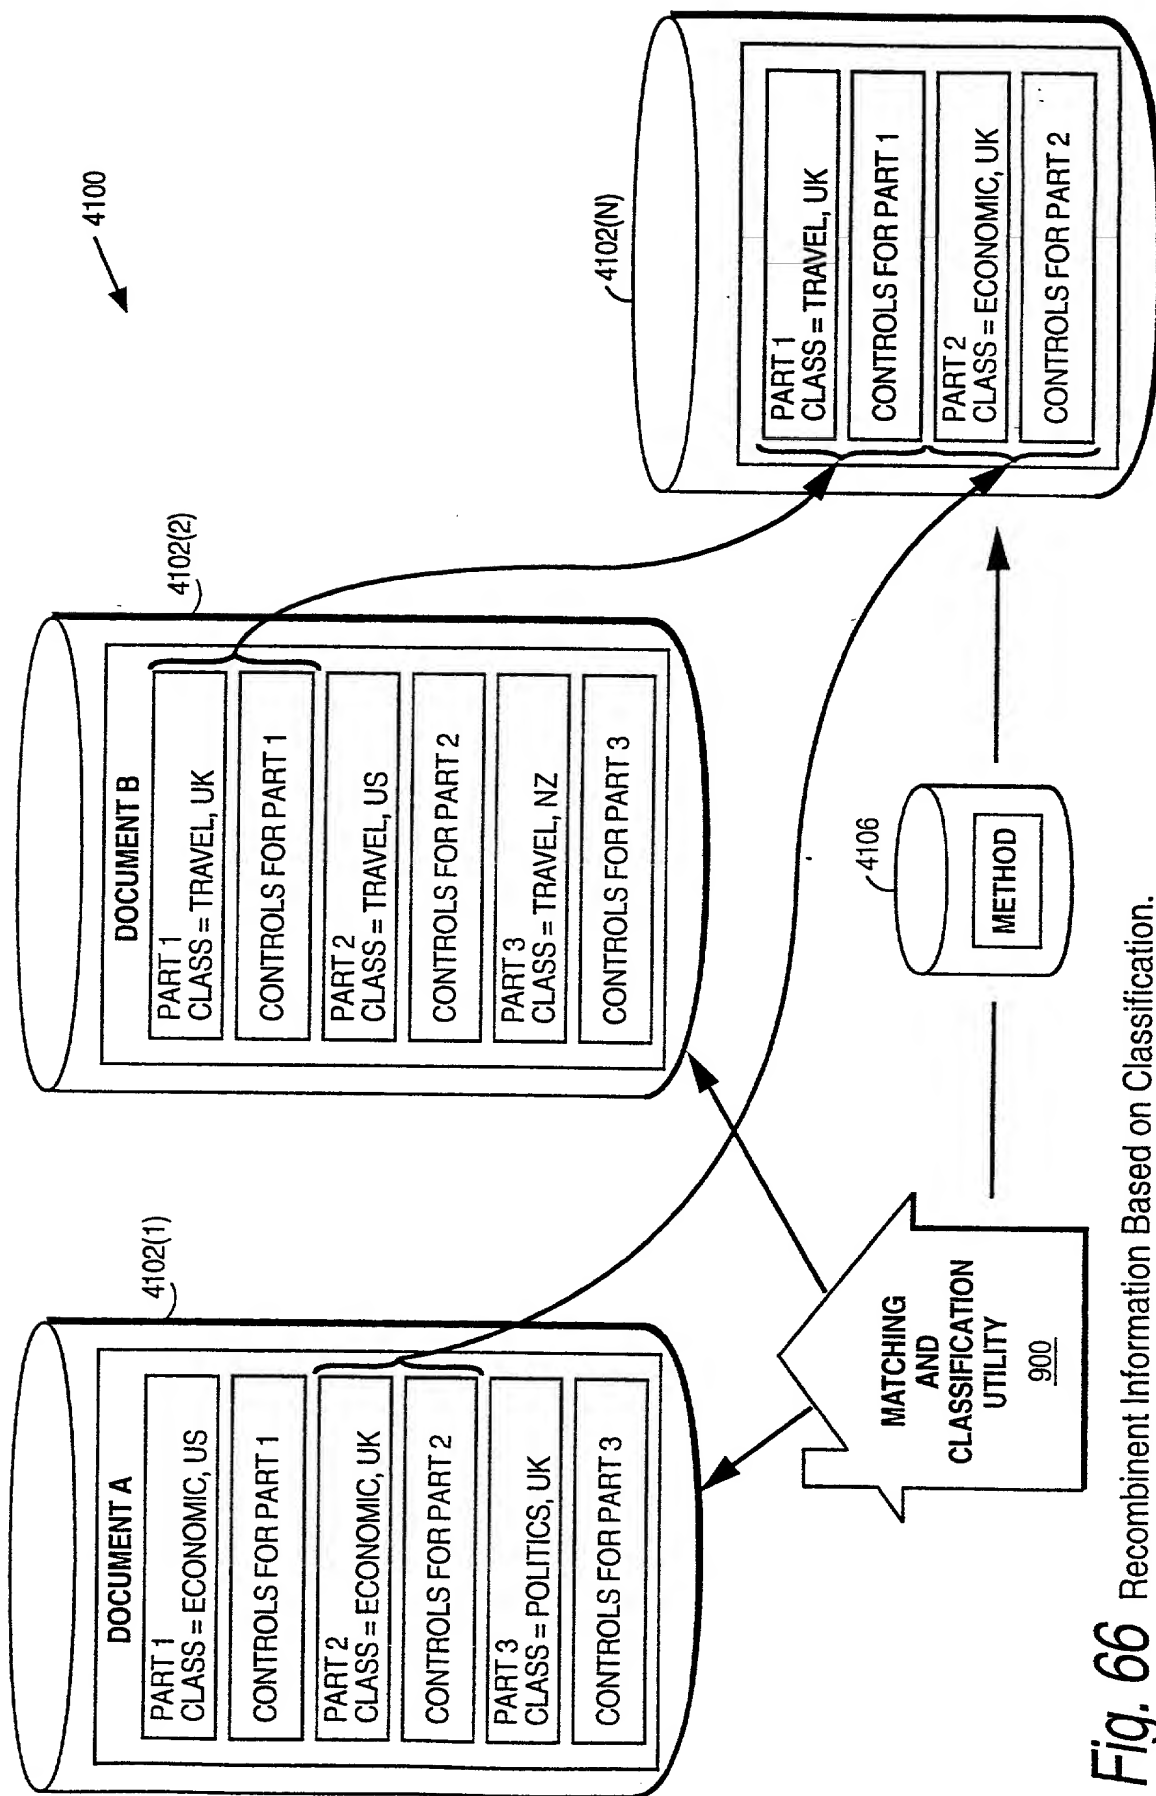


Fig. 66 Recombinant Information Based on Classification.

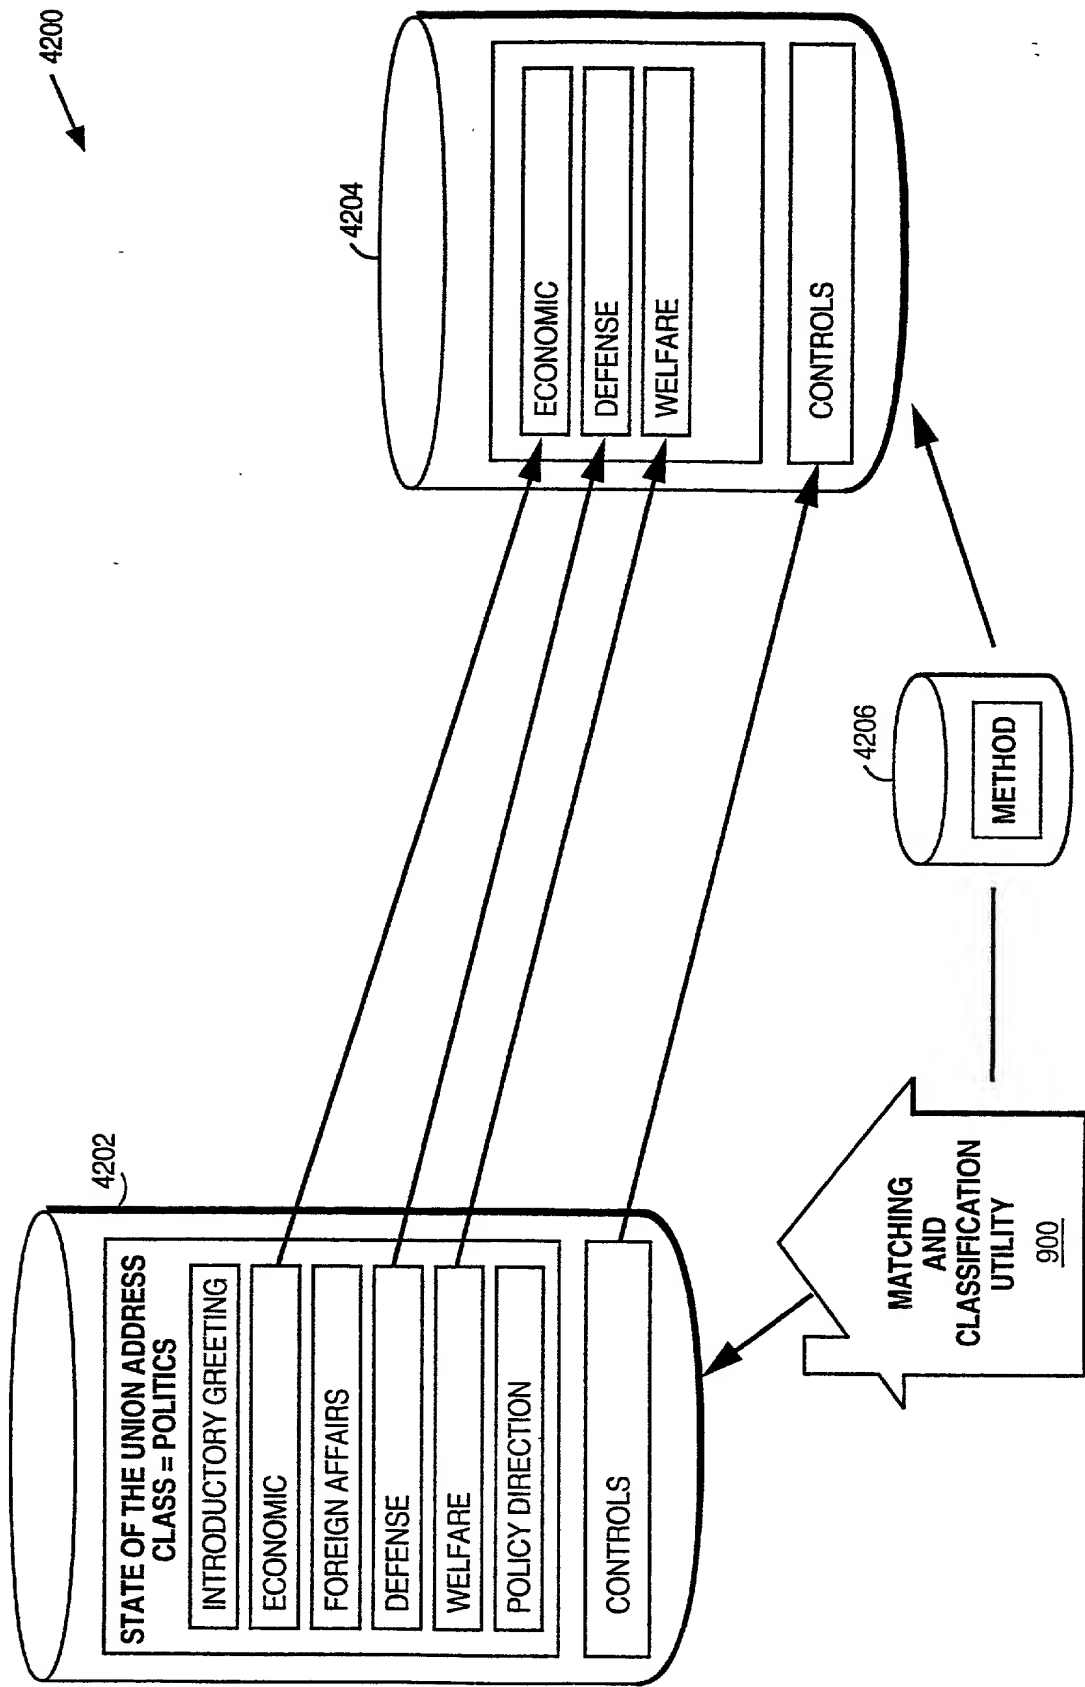
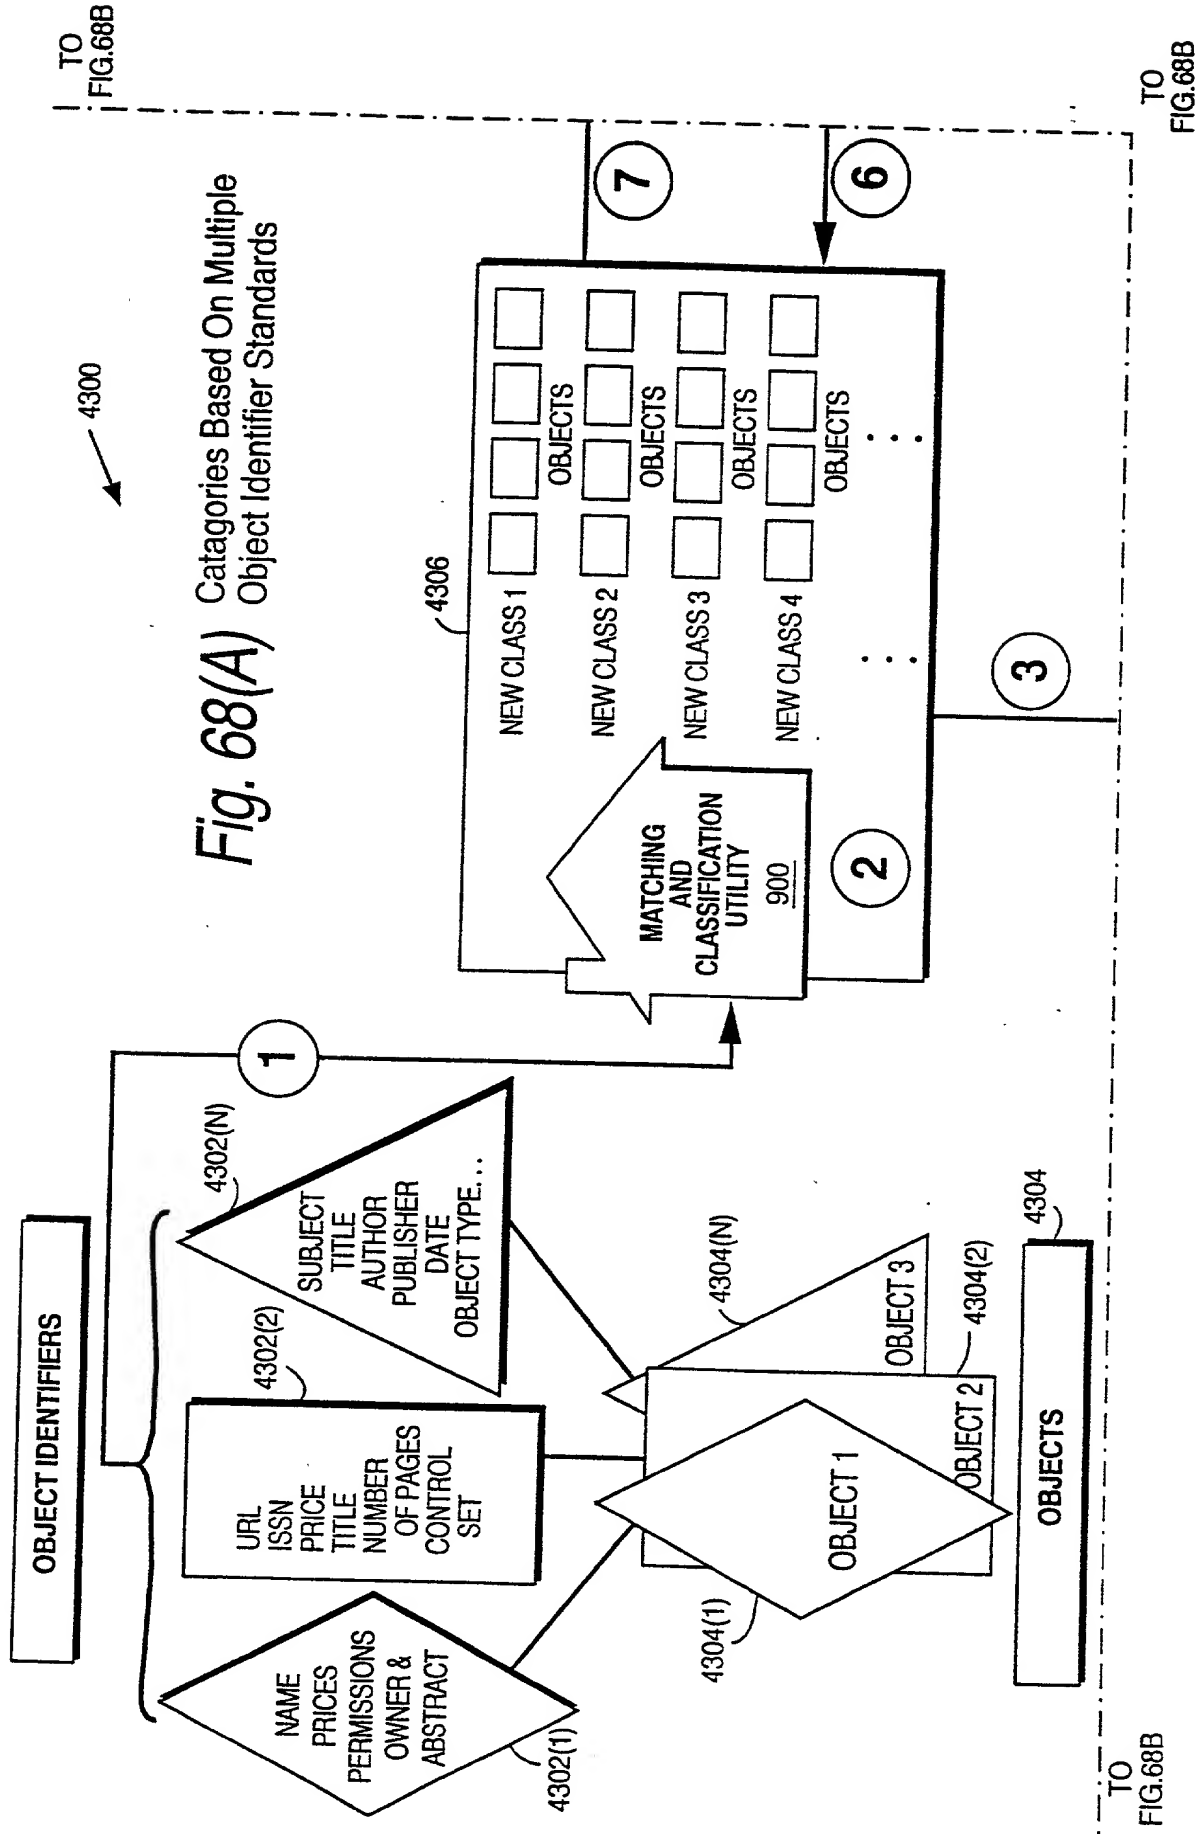


Fig. 67 Nested Classification.



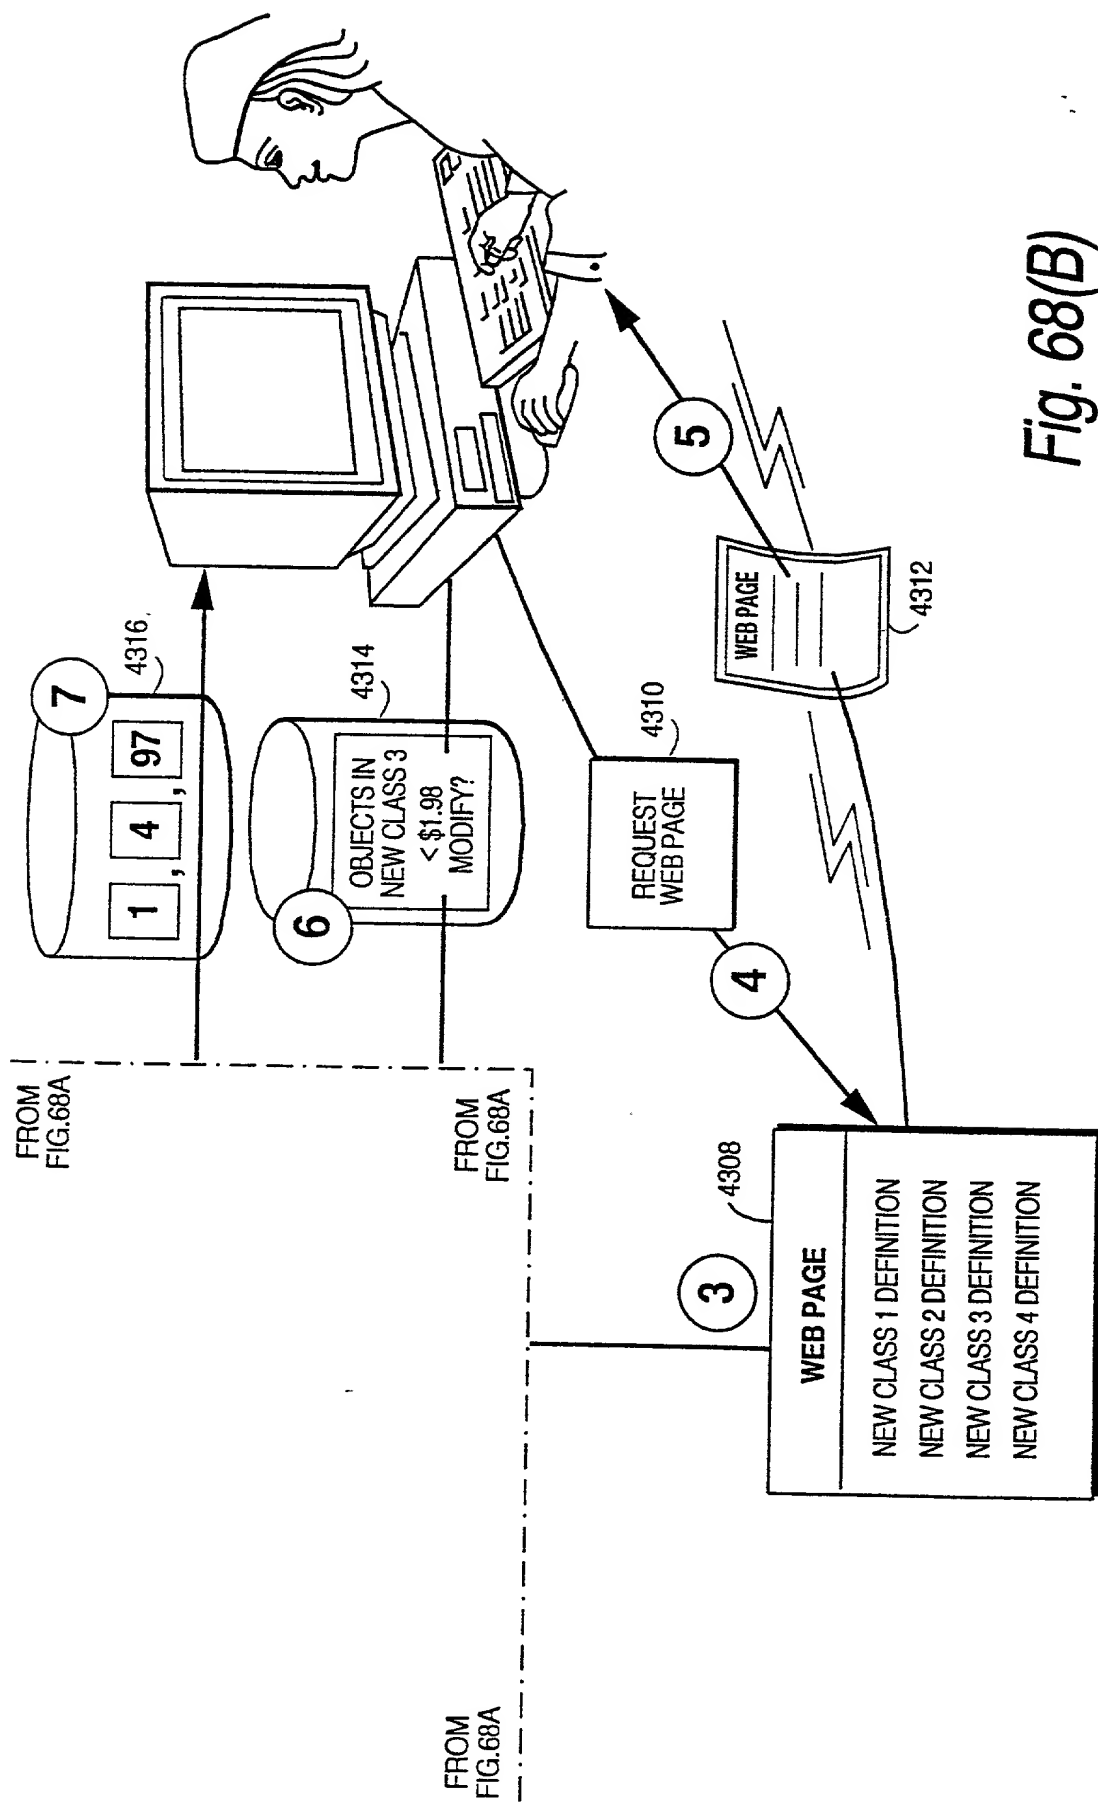


Fig. 68(B)

#895-67: f-023.al

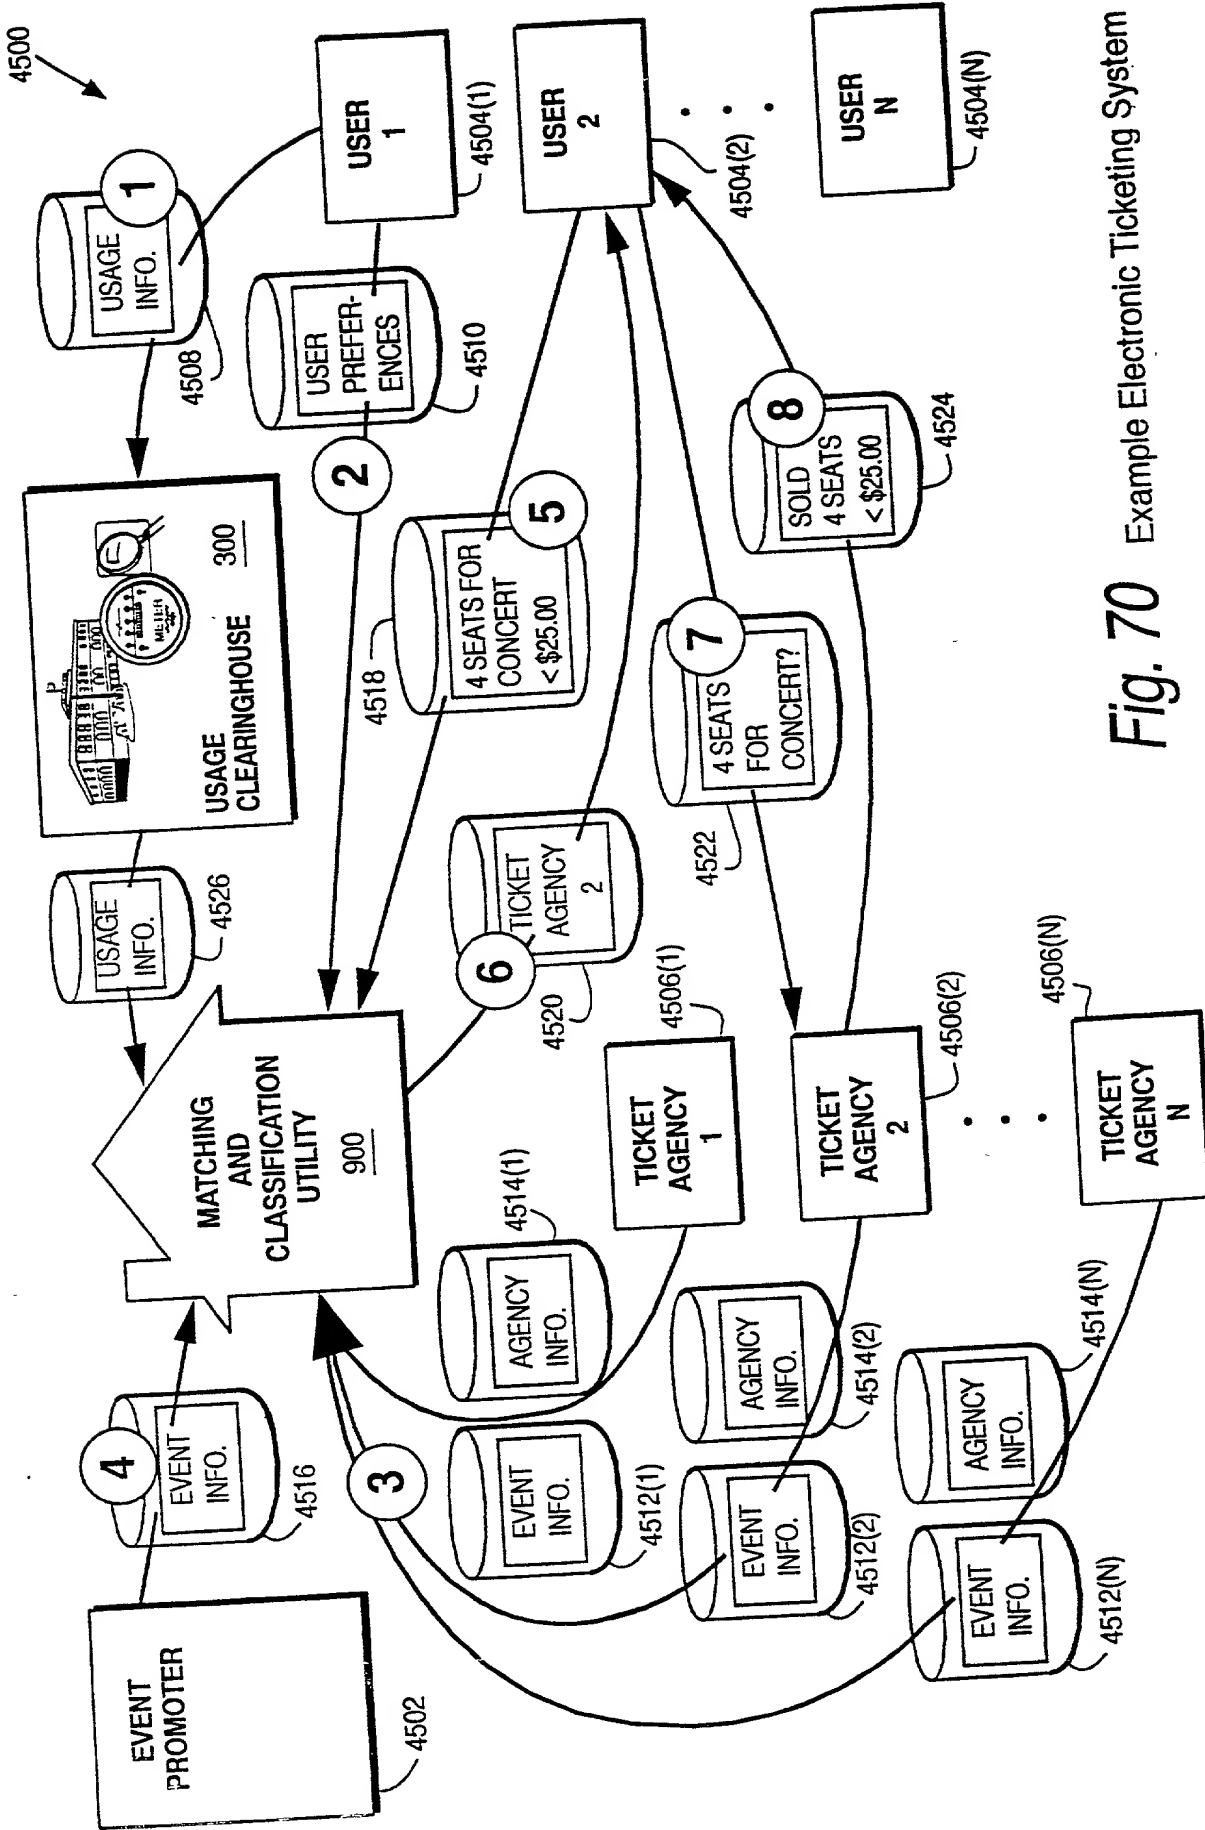


Fig. 70 Example Electronic Ticketing System